

Technical Data

Pump Name

300 DL 518

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-13 13:12:02	E-mail

Requested data

1	Pump type		SUBMERSIBLE SEWAGE PUMP-Non-clog	Fluid		Water
2	Number of pumps / Reserve	1 / 0		Liquid temperature	°C	20
3	Flow	m³/h		Kin. viscosity	mm²/s	1.005
4	Head	m		Vapour pressure	bar	0.0234
5	Geodetic head	m		PH value		
6	Inlet pressure (pin)	bar	0	Density	kg/m³	998.3
7	Available system NPSH			Solids	Weight %	0
8	Ambient temperature	°C	20			

Pump

9	Pump Name	300 DL 518	Frequency	Hz	50			
10	Design	SUBMERSIBLE SEWAGE PUMP-Non-clog	Installation type		STANDARD			
11	Manufacturer	EBARA	Impeller Diameter	Max.	mm	267		
12	Speed	rpm		1450	Designed	mm	267	
13	No. of Stage	1		Min.	mm	267		
14	Connection	Suction side	Flow	Operating	m³/h			
15	Connection	Discharge side		JIS	10K	Max-	m³/h	690
16	Max Working Pressure	bar		Min-	m³/h	378		
17	Shut-off head	bar	1.63	Head	Operating	m		
18	Total weight	kg	See the table of "Dimensions".		- (Qmax.)	m	4.2	
19	Shaft power	kW			- (Qmin.)	m	9.5	
20				Max. Shaft Power at max. impeller	kW	14.62		
21	Required pump NPSH	m		Efficiency	%			

Materials

22	Casing	FC200	Mechanical seal (Lower)	SiC/SiC
23	Suction Cover	FC200	Lubricating Oil	Turbine Oil VG32
24	Impeller	FC200		
25	Shaft	SUS403		
26	Motor frame	FC150		
27	Mechanical seal (Upper)	Carbon/Ceramic		

Motor

28	Manufacturer	--	Insulation class	F		
29	Type	DL 518_380_Three phase	Phases	3~		
30	Specific design	Submersible dry type / 50 Hz / Pole pairs 2	Frame size			
31	Rated power	kW	18.5	Weight	kg	
32	Number of poles	4	Electric voltage	V	380	
33	Speed	rpm	1470	Electric current	A	36.5
34	Degree of protection	IP68				
35						

Remarks

Performance Curve

Pump Name

300 DL 518

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-13 13:12:02	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		4
Impeller diameter designed	mm	267	Speed	rpm	1450

Test standard: ISO 9906:2012 - Grade3B

Water; 20°C; 998.3kg/m³; 1mm²/s

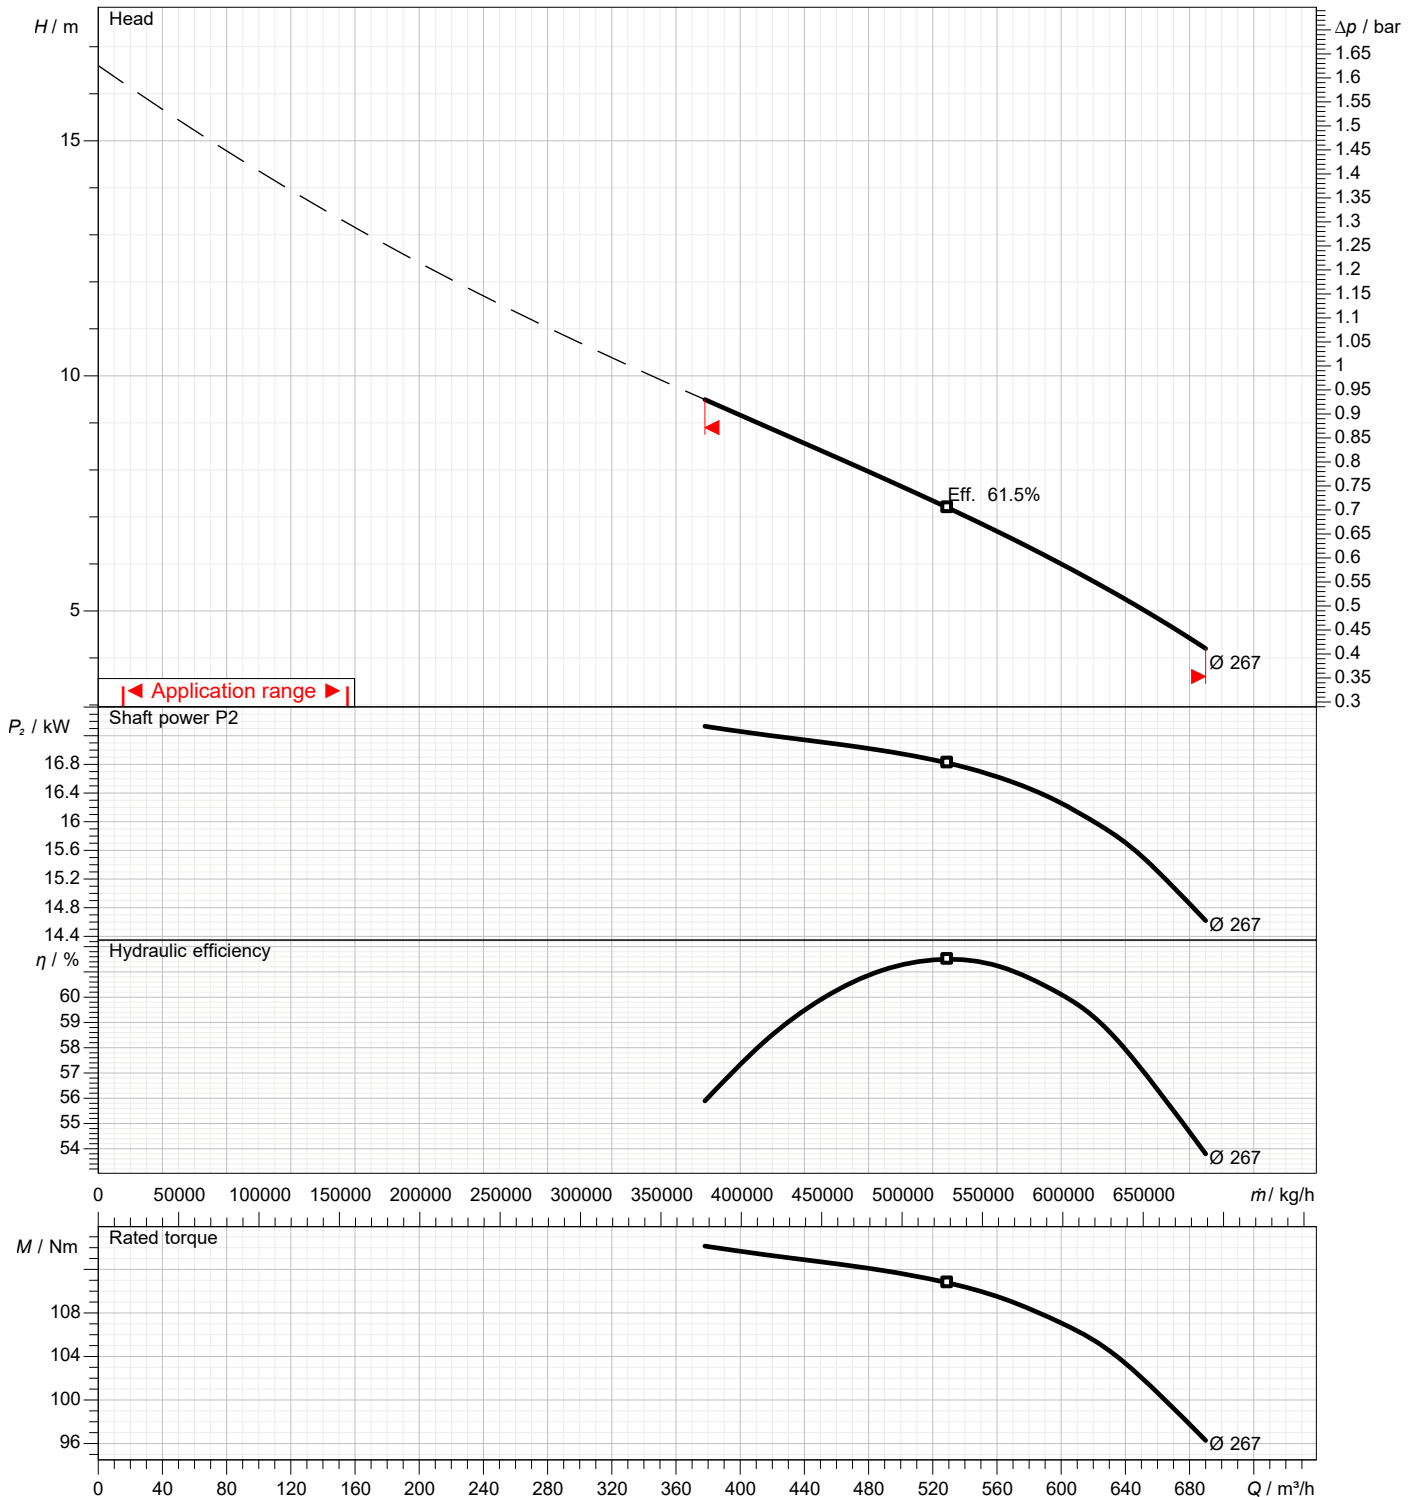


Dimensions


Pump name

300 DL 518

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-13 13:12:02	E-mail

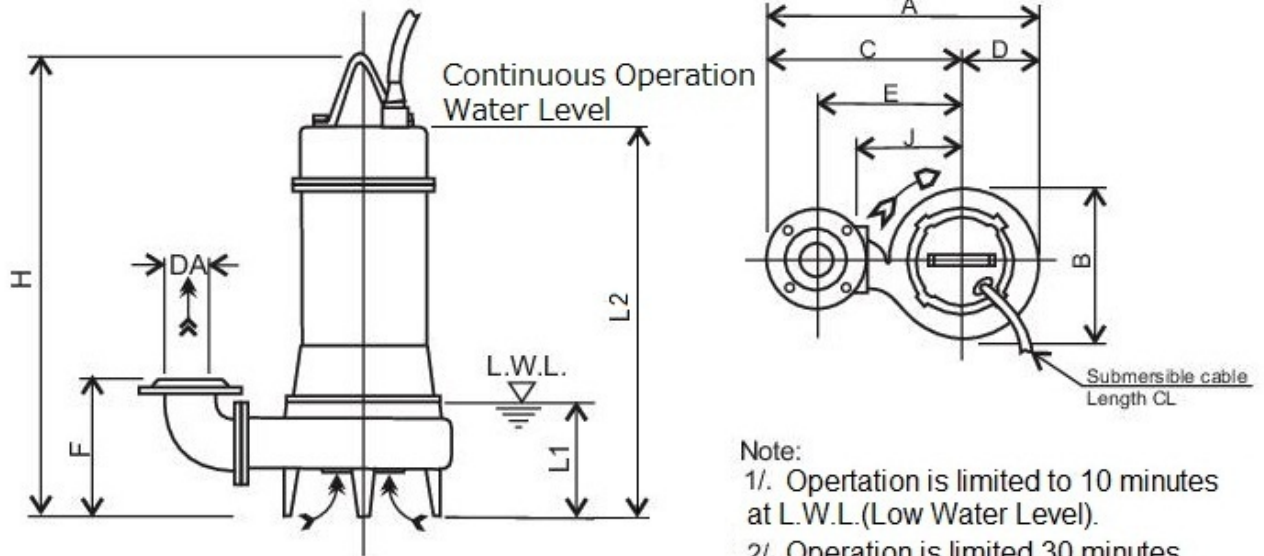

Note:
 1/. Operation is limited to 10 minutes at L.W.L.(Low Water Level).
 2/. Operation is limited 30 minutes with water level below top of motor

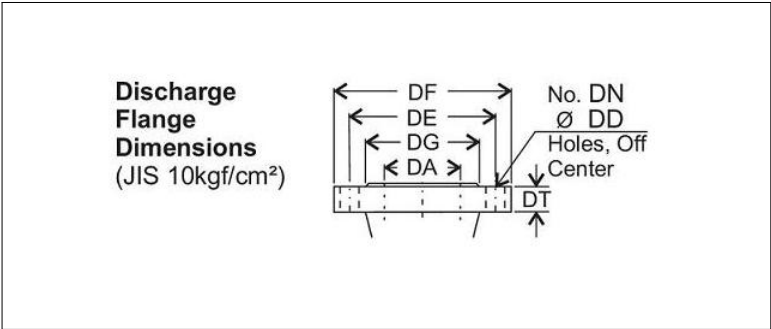


Pump dimensions		mm		Suction side		mm		Discharge side		mm	
A	1135					DA	300				
B	618					DD	25				
C	818					DE	400				
CL	10m					DF	445				
D	317					DG	368				
E	595					DN Num	16 (Num)				
F	668					DT	32				
H	1131										
J	440										
L1	450										
L2	971										

Construction

Pump name

300 DL 518

Customer	Date 2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Proiect redenumit 2024-06-13 13:12:02	E-mail

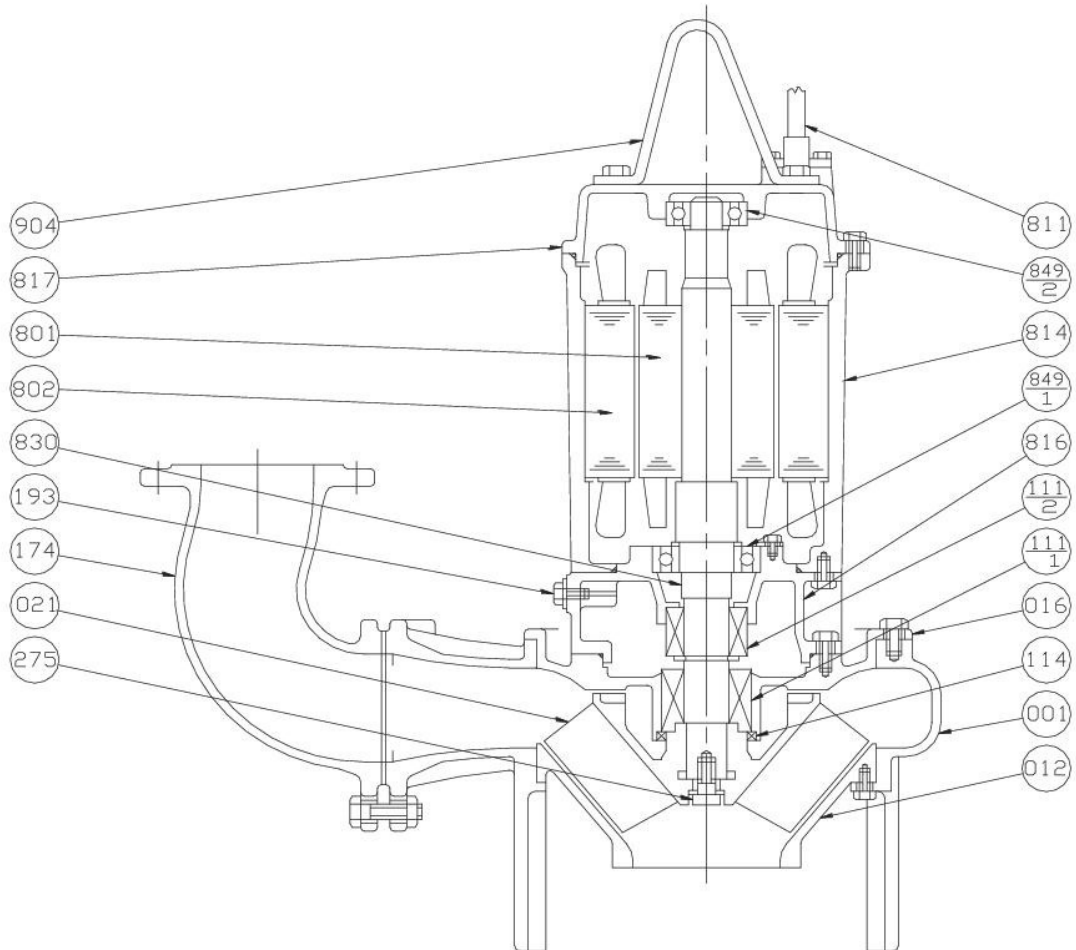

*: 2 FOR POWER AND 1 FOR CONTROL CABLE (THERMAL PROTECTOR)

Item Number	Description	Material	Quantity per unit
001	Pump Casing	FC200 Cast iron	1
012	Suction Cover	FC200 Cast Iron	1
016	Mechanical Seal Cover	FC200 Cast iron	1
021	Impeller	FC200 Cast iron	1
111-1	Mechanical Seal		1
111-2	Mechanical Seal		1
114	Oil Seal	NBR Rubber	1
174	Discharge Bend	FC200 Cast iron	1
193	Oil Plug	C3604 or SUS304 Brass or 304 Stainless Steel	1
275	Impeller Bolt	SUS304 Stainless Steel	1

Item Number	Description	Material	Quantity per unit
801	Rotor		1
802	Stator		1
811	Submersible Cable		3 *
814	Motor Frame	FC150 Cast Iron	1
816	Power Side Bracket	FC150 Cast Iron	1
817	Opposite Side Bracket	FC150 Cast Iron	1
830	Shaft	SUS403 Stainless Steel	1
849-1	Ball Bearing		1
849-2	Ball Bearing		1
904	Lifting Hanger	SS Steel	1