

Technical Data

Pump Name

3E 65-100/0.75

Customer	Date	09.06.2024	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID		E-mail

Requested data

1	Pump type	Inline vertical	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature	°C
3	Flow	m³/h	Kin. viscosity	cSt
4	Head	m	Vapour pressure	kPa
5	Geodetic head	m	PH value	
6	Inlet pressure (pin)	kPa	Density	kg/m³
7	Available system NPSH		Solids	Weight %
8	Ambient temperature	°C		

Pump

9	Pump Name	3E 65-100/0.75	Frequency	Hz	50	
10	Design	Inline vertical	Installation type		With motor	
11	Manufacturer	EBARA	Impeller Diameter	Max.	mm	
12	Speed	rpm		2900	Designed	mm
13	No. of Stage	1		Min.	mm	94
14	Connection	Suction side	EN	10k	Flow	
15	Connection	Discharge side	EN	10k		Operating
16	Max Working Pressure	kPa	1000	Max-		m³/h
17	Shut-off head	kPa	109.00	Head	Operating	
18	Total weight	kg	See the table of "Dimensions".		- (Qmax.)	m
19	Shaft power	kW			- (Qmin.)	m
20				Max. Shaft Power at max. impeller	kW	
21	Required pump NPSH	m		Efficiency	%	

Materials

22	Impeller	CF8		
23	Casing	Cast iron		
24	Shaft	AISI 304(wet extension)		
25				
26				
27				

Motor

28	Manufacturer	EPE Standard	Insulation class	F	
29	Type	TEFC_3E_2_0.75_230_1	Phases	3~	
30	Specific design	TEFC / 50 Hz / Pole pairs 1	Frame size		
31	Rated power	kW	0.75	Weight	kg
32	Number of poles	2	Electric voltage	V	230
33	Speed	rpm	2900	Electric current	A
34	Degree of protection	IP55			
35					

Remarks

Performance Curve

Pump Name

3E 65-100/0.75

Customer	Date	09.06.2024	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID		E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		2
Impeller diameter designed	mm	94	Speed	rpm	2900

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1cSt

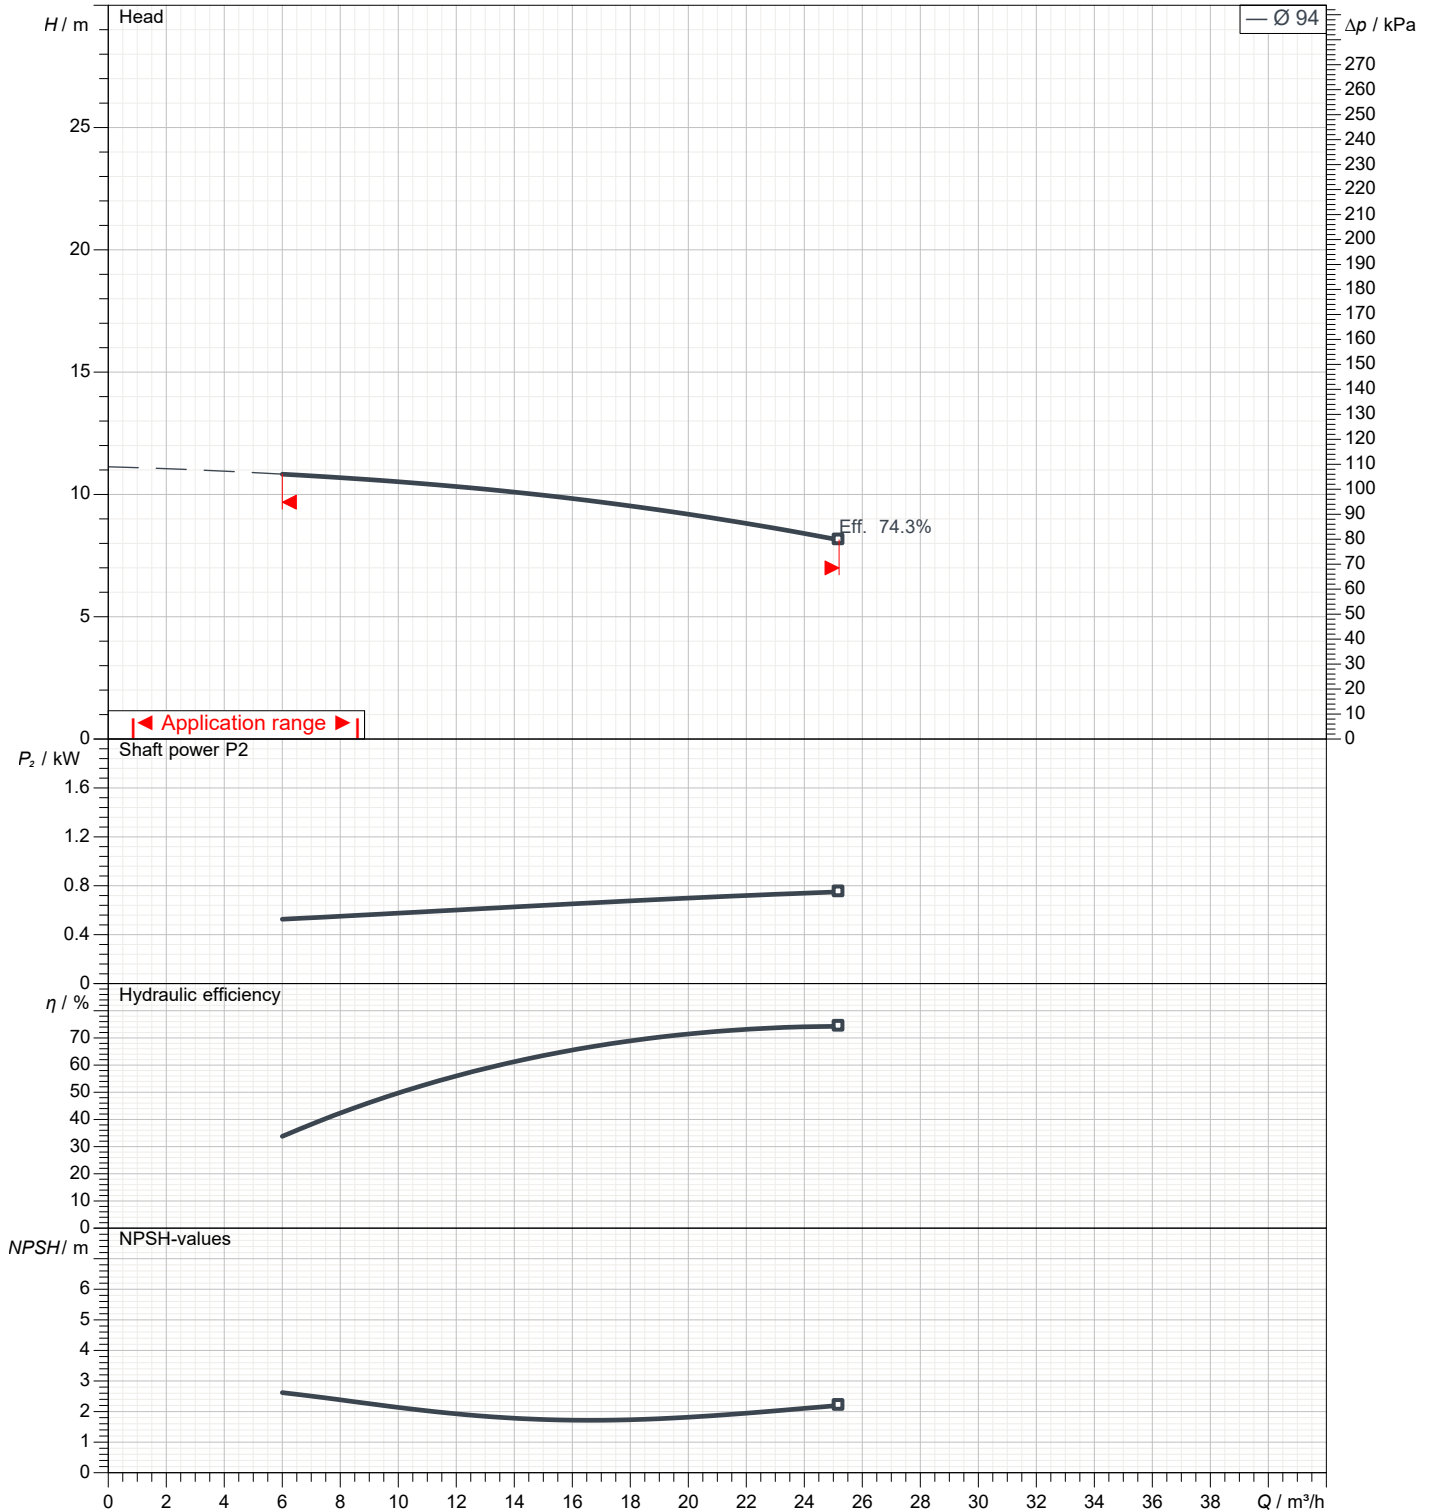

Dimensions

Pump Name 3E 65-100/0.75

Customer	Date 09.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

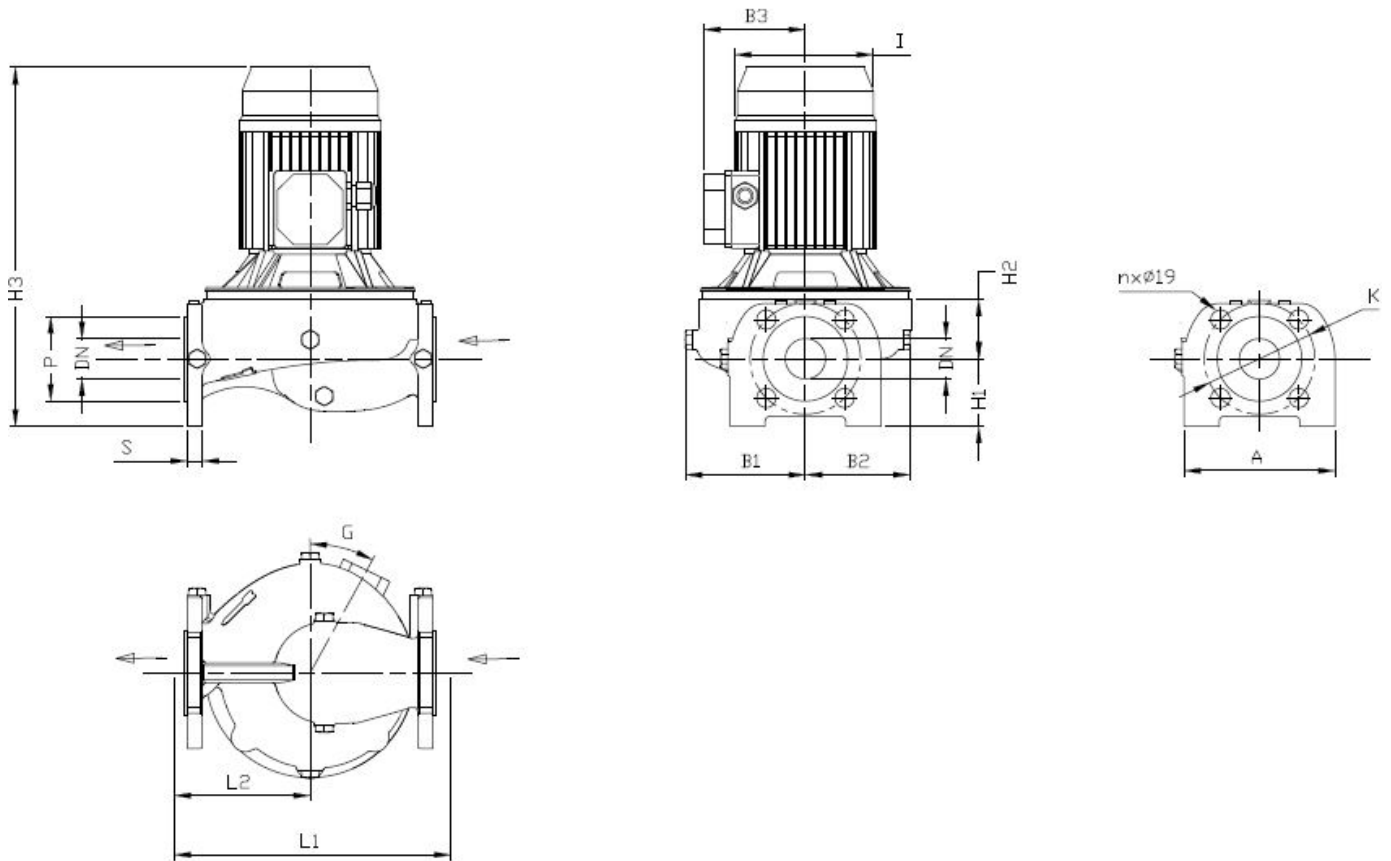



Dimensions in		mm					
1	A	185	Φ K	145			
2	B1	115	Φ P	118			
3	B2	100					
4	B3	101					
5	G	0					
6	H1	82					
7	H2	40					
8	H3	352					
9	I	140					
10	L1	340					
11	L2	170					
12	n	4(Num)					
13	S	20					
14	Weight P&M	23.6 kg					
15	Φ DN	65					

(1/3)

Construction

Pump Name 3E 65-100/0.75

Customer	Date 09.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

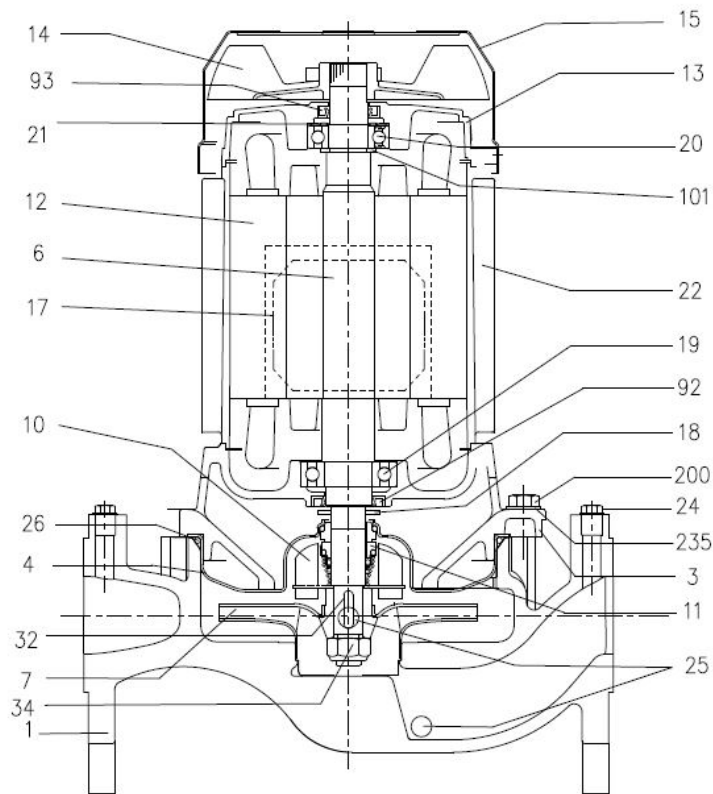

(2/3)

Construction

Pump Name 3E 65-100/0.75

Customer	Date 09.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

No	PART NAME	MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing	Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket [1]	-			1
4	Casing cover	EN 1.4301(AISI 304)			1
6	Shaft with rotor - Wet extension	EN 1.4301(AISI 304)			1
7	Impeller	EN 1.4301(AISI 304)			1
10	Baffle [2]	EN 1.4301(AISI 304)			1
11	Mechanical seal [3]				1
12	Motor frame with stator	-			1
13	Motor cover	Aluminium			1
14	Fan	PA			1
15	Fan cover	Fe P04 Galvanized			1
16	Terminal	-			1
17	Terminal box cover	Aluminium (three phase version)			1
18	Splash ring	0.37 kW to 0.75 kW Up to 11kW 15 kW and above	25x14.5x2.5	EBARA DRAWING	1
			40x21.5x2		
			50x29.5x3		
19	Bearing	.			1
20	Bearing	.			1
21	Adjusting ring	Steel C70			1
22	Tie rod	Up to 3 kW For 4 to 7.5 kW 9.2 kW to 11kW	M5	EBARA DRAWING	4
			M6		
			M8		
22	Screw	15 kW and above	Gv. Steel 8.8 strength class ISO 898-1	M10x40	UNI 5739
24	Plug		Brass	G 1/4	2
25	Drain plug		Brass	G 1/4	4
26	O-ring	32-125,50-100,65-100,80-100,40-160/1.1 40-160, 50-160,	EPDM[4]	158.11x5.34	OR 6625
				183.52x5.34	OR 6720
32	Key	32-125,50-100,65-100/0.55,65-100/0.75 40-160,50-125,50-160,65-100/1.1,65-100/1.5,80-100	EN 1.4401(AISI 316)	A 4x4x14	UNI 6604
				A 6x6x18	
34	Impeller nut	32-125,50-100,65-100/0.55,65-100/0.75 40-160,50-125,50-160,65-100/1.1,65-100/1.5,80-100	EN 1.4301(AISI 304)	M10x1.25	UNI 7474
				M16x1.5	
56	Box gasket		NBR		1
58	Cable gland		-		1
92	Lip seal	32-125,50-100,65-100 Up to 3kW From 4 to 7.5 kW		15x30x5	DIN 3760 without spring
				25x40x7	
				30x47x7	
93	Lip seal	32-125,50-100,65-100/0.55, 65-100/0.75 40-160,50-125,80-100 Up to 4 kW		15x30x5	DIN 3760 without spring
				17x32x6	
				25x40x7	
200	Screw	32-125,50-100,65-100/0.55, 65-100/0.75 65-100/1.1,65-100/1.5 50-125,80-100 40-160,50-160	Gv. Steel 8.8 strength class ISO 898-1	M6x25	UNI 5739
				M 6x30	
				M 8x30	
				M10x35	
235	Washer	32-125,50-100,65-100 50-125,80-100 40-160,50-160	Galvanized Steel		UNI 6592
				8.4x17	
				10.5x21	


- [1] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others;
- [2] EN1.4301(AISI 304) for 32-125,40-160,50-100/125/160
CF8 for 65-100,80-100
- [3] See MECHANICAL SEAL pages
- [4] FPM for Q1AVGG
EPDM for Q1AEGG,Q4Q1EGG

(3/3)

Construction

Pump Name 3E 65-100/0.75

Customer	Date 09.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

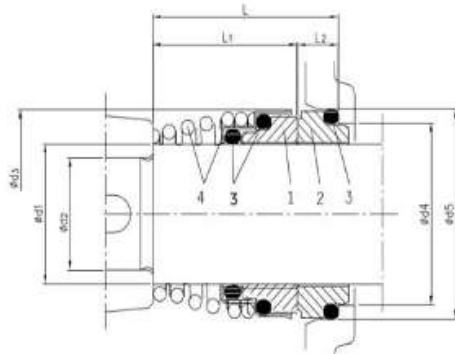

Version	Pump type	Dimensions [mm]								Material			
		d1	d2	d3	d4	d5	L	L1	L2	1 Rotary seal ring	2 Stationary seal ring	3 Rubber	4 Frame + Spring
Standard (Q1AEGG)	32-125/160/200	15	12	26	21	26.9	29	22	7	Silicon Carbide	Materialised Carbon	EPDM	EN 1.4401 (AISI 316)
	50-100												
	65-100/0.55-0.75												
	40-160/200												
	50-125/160/200												
	65-100/1.1-1.5												
	65-125/160/200												
	80-100												
	80-160/9.2-11												
	80-160/15												
80-200													
100-160													