

Technical Data

Pump Name

3LPF4 32-200/R

Customer	Date 10.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity cSt	1.005
4	Head m		Vapour pressure kPa	2.34
5	Geodetic head m		PH value	
6	Inlet pressure (pin) kPa	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump Name	3LPF4 32-200/R	Frequency Hz	50
10	Design	CENTRIFUGAL PUMPS	Installation type	STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm 186
12	Speed rpm	1400		Designed mm 186
13	No. of Stage	1		Min. mm 186
14	Connection Suction side	DIN 2532	Flow	Operating m³/h
15	Connection Discharge side	DIN 2532		Max- m³/h 10.5
16	Max Working Pressure kPa	1000		Min- m³/h 3
17	Shut-off head kPa	105.79	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m 6.2
19	Shaft power kW			- (Qmin.) m 10.3
20			Max. Shaft Power at max. impeller kW	0.37
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	AISI 316L		
23	Casing	AISI 316L		
24	Shaft	AISI 316L		
25				
26				
27				

Motor

28	Manufacturer	without motor	Insulation class	
29	Type	without motor 3	Phases	
30	Specific design	without motor / 50 Hz / Pole pairs 2	Frame size	
31	Rated power kW		Weight kg	
32	Number of poles	4	Electric voltage V	
33	Speed rpm		Electric current A	
34	Degree of protection			
35				

Remarks

--

Performance Curve

Pump Name

3LPF4 32-200/R

Customer	Date	10.06.2024	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID		E-mail


Requested data

1	Flow	m³/h		Operating flow	m³/h		Frequency	Hz	50
2	Head	m		Operating head	m		Number of poles		4
3	Geodetic head	m		Impeller diameter designed	mm	186	Speed	rpm	1400

Pump

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1cSt

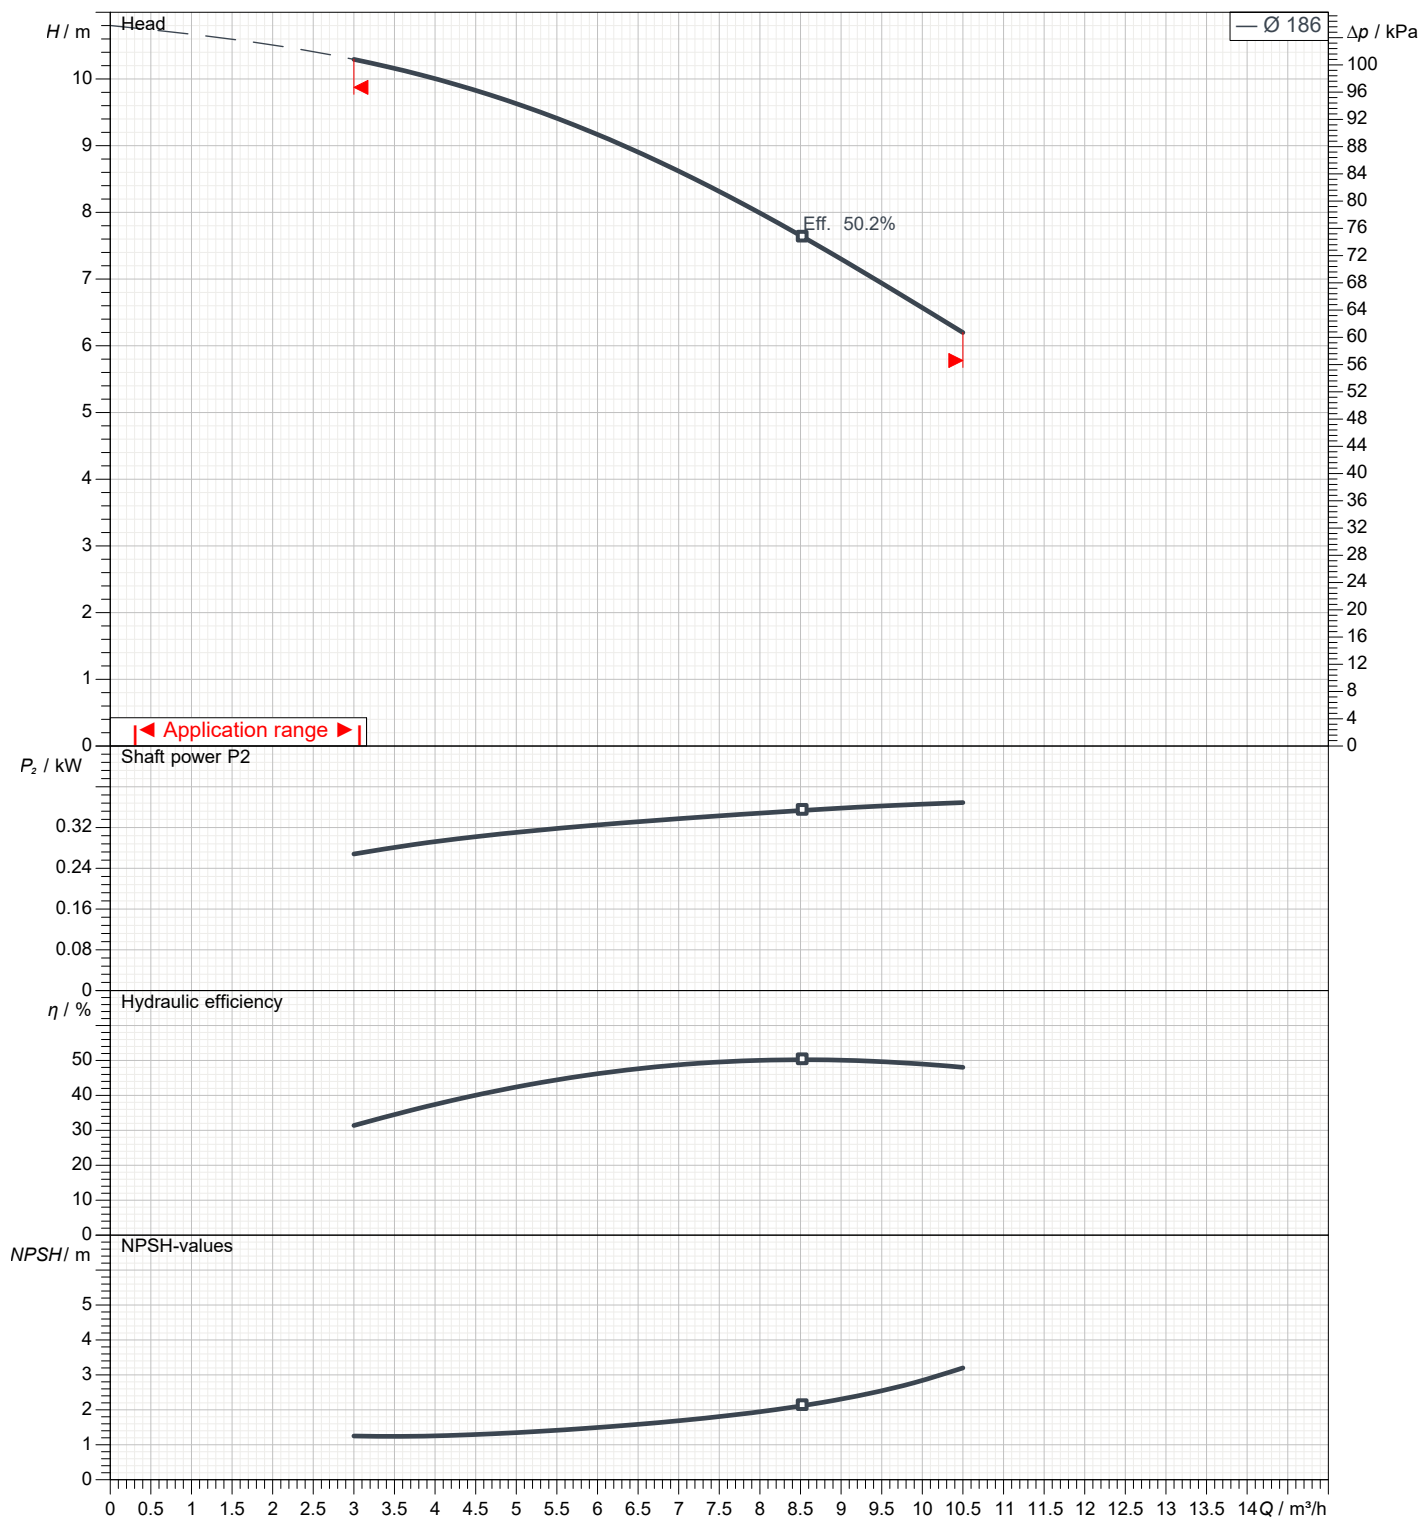

Dimensions

Pump Name 3LPF4 32-200/R

Customer	Date 10.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

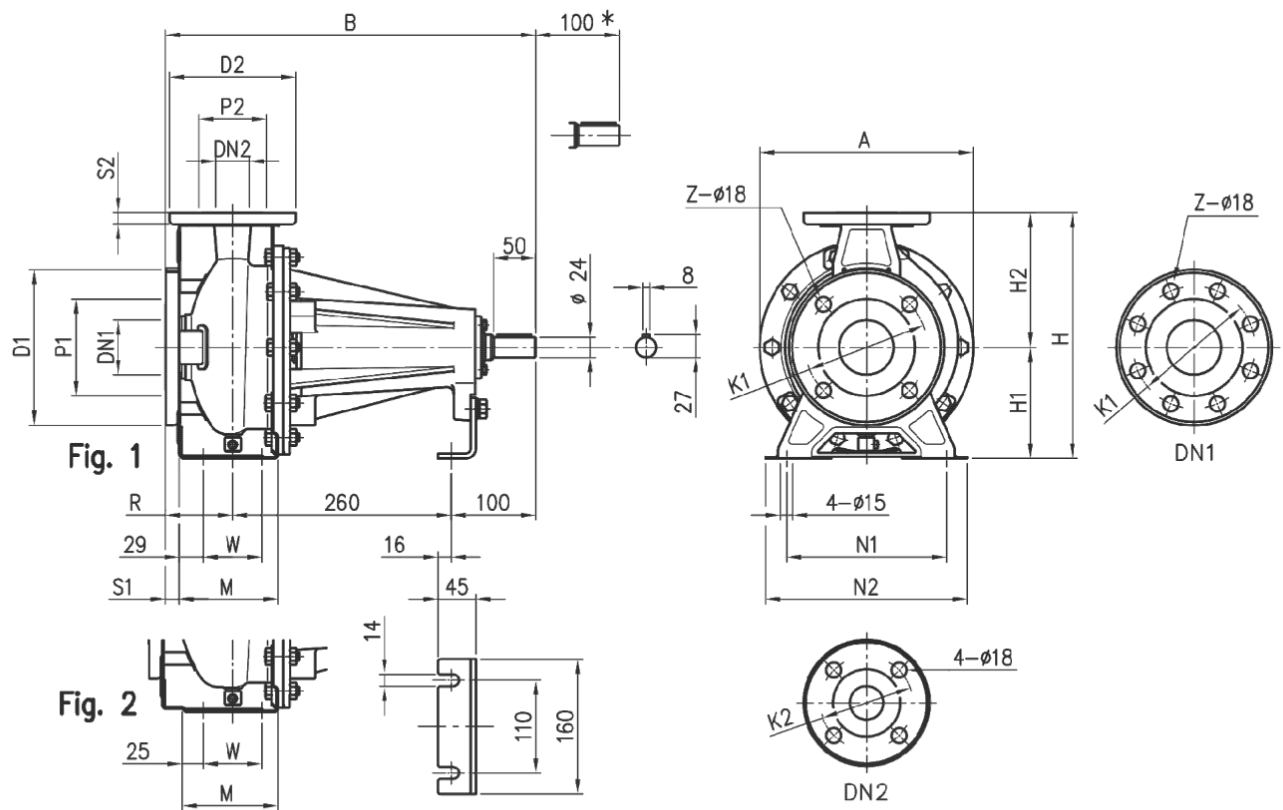

* Space for disassembly

Dimensions in		mm						
1	A	296	N1	190				
2	B	440	N2	240				
3	Dia D1	165	R	80				
4	Dia D2	140	S1	16				
5	Dia DN1	50	S2	14				
6	Dia DN2	32	W	70				
7	Dia K1	125	Weight PUMP	27 kg				
8	Dia K2	100	Z	4				
9	Dia P1	95						
10	Dia P2	75						
11	Fig	1						
12	H	340						
13	H1	160						
14	H2	180						
15	M	119						


(1/3)

Construction

Pump Name

3LPF4 32-200/R

Customer	Date10.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

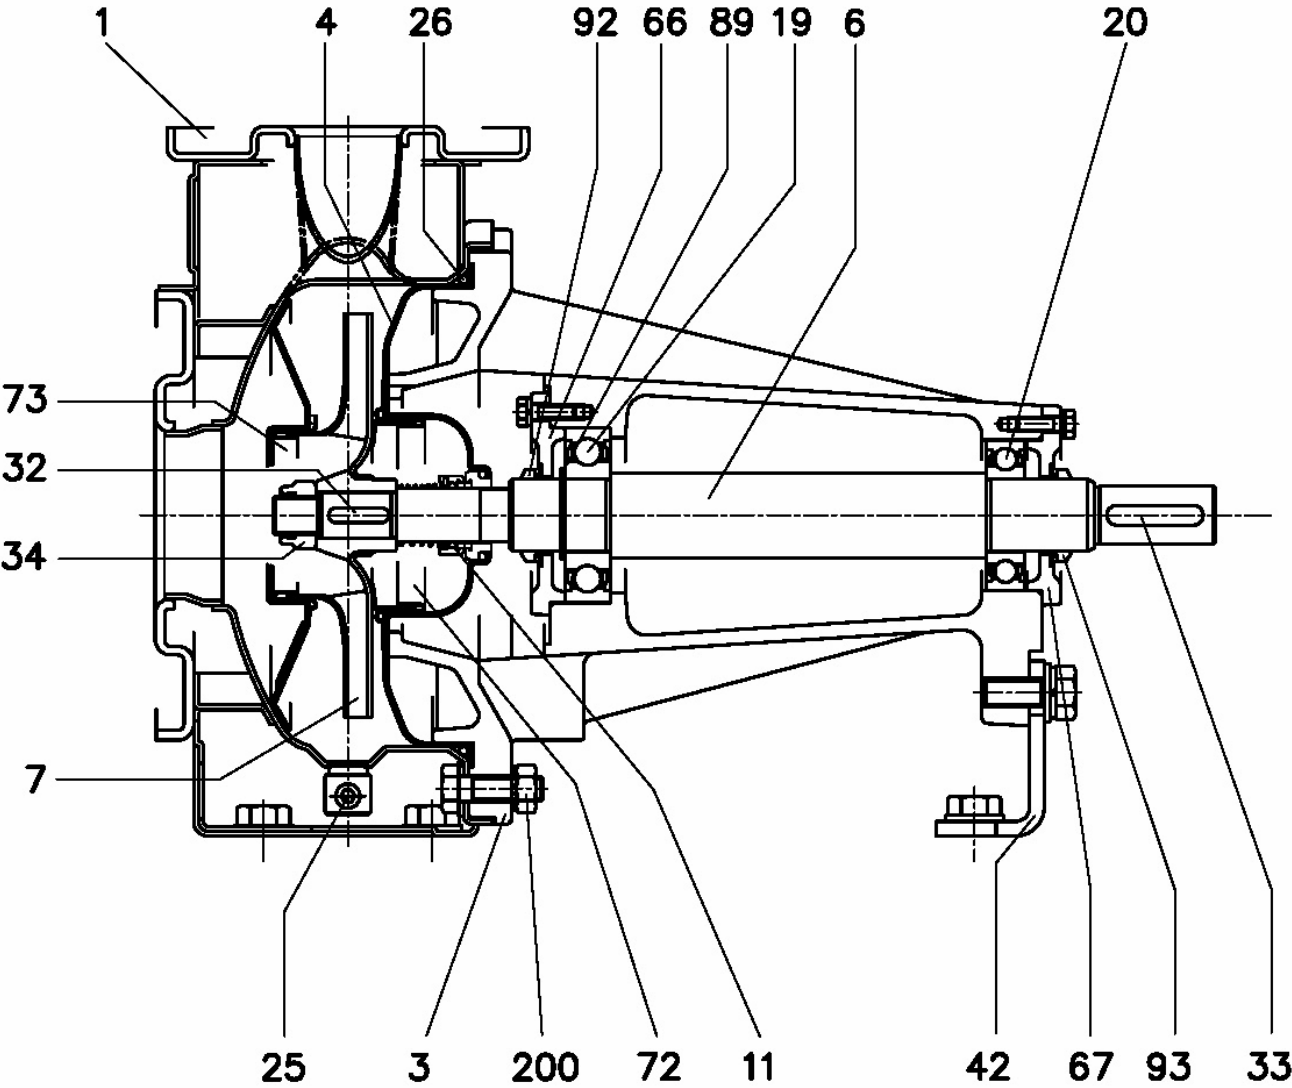

(2/3)

Construction

Pump Name 3LPF4 32-200/R

Customer	Date 10.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

N°	PART NAME		MATERIAL		DIMENSIONS	STANDARD	Q.TY
			3PF(4)	3LPF(4)			
1	Casing		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
3	Support		Cast iron EN-GJL-200-EN 1561				1
4	Casing cover		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
6	Shaft - Part in contact with liquid		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
7	Impeller 32-40-50		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
	65-125/160/200		EN 1.4401 (AISI 316)				
11	Mechanical seal [3]		Carbon/Ceramic/NBR	SiC/SiC/FPM			1
19	Bearing		-				1
20	Bearing		-				1
25	Draining plug		EN 1.4401 (AISI 316) / PTFE		R 1/8" L=8	DIN 906	1
26	O ring	32-125, 40-125	NBR [4]	FPM	158.11x5.34	OR 6625	1
		32-160, 40-160, 50-125, 65-125			183.52x5.34	OR 6720	
		32-200, 40-200, 50-160, 50-200, 65-160, 65-200			227.96x5.34	OR 6895	
32	Key		EN 1.4401 (AISI 316)		6x6x25	UNI 6604	1
33	Key		C 40		8x7x40	UNI 6604	1
34	Impeller nut	Other model	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	M16x1.5	UNI 7474	1
		50-200/2.2			M18x1.5		
42	Pump support		Zinc-coated steel			EBARA DRAWING	1
66	Impeller side bearing cover		Cast iron EN-GJL-200-EN 1561				1
67	Motor side bearing cover		Cast iron EN-GJL-200-EN 1561				1
72	Casing ring (not for 65 version) [1]		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
73	Casing ring (not for 65 version)		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
89	Snap ring 32-125, 32-160, 40-125, 50-125		Carbon tool steel TC 80		Ø30	UNI 7435	1
	Other model				Ø40		
92	O ring		-		VS - 0030		1
93	O ring		-		VS - 0030		1
200	Screw	32-125, 40-125	Stainless steel A2 70 class ISO 3506/1		M 8x30	UNI 5739	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			M 10x35	UNI 5739	[2]

[1] For version: 32-200, 40-200, 50-160, 50-200

[2] N° for 1 unit=10 for 32-160, 40-160, 50-125, 65-125

N° for 1 unit=12 for 32-200, 40-200, 50-160, 50-200, 65-160, 65-200

[3] Special version: see CONSTRUCTION 3

[4] FPM for H-HS-HW-HSW option

EPDM for E version, Q1AEGG, U3U3EGG, Q1Q1EGG, Q1U3EGG, U3CEGG


(3/3)

Construction

Pump Name

3LPF4 32-200/R

Customer	Date10.06.2024	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID	E-mail

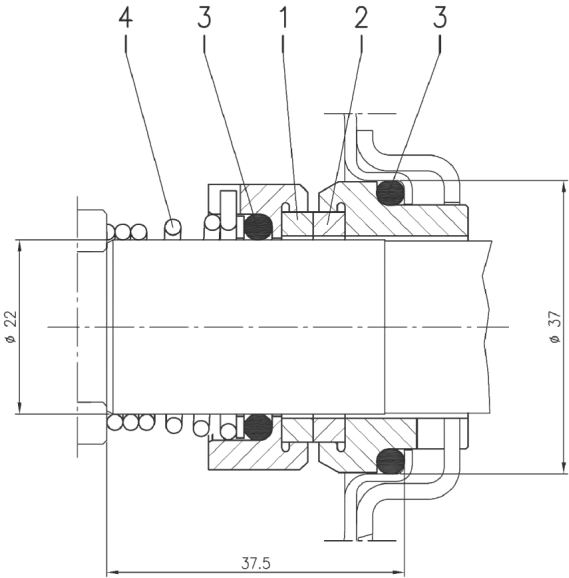

Version	Pump type	Material			
		1 Stationary seal ring	2 Rotary seal ring	3 Rubber	4 Frame + spring
L ø22	32-125/160/200 40-125/160/200 50-125/160/200 65-125/160/200 80-160	SiC	SiC	FPM	EN 1.4571 (AISI 316Ti)