

Technical Data

Pump Name

3M4 65-200/2.2R

Customer	Date	2024-06-12	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-12 12:10:37	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity mm²/s	1.005
4	Head m		Vapour pressure bar	0.0234
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump Name	3M4 65-200/2.2R	Frequency Hz	50
10	Design	CENTRIFUGAL PUMPS	Installation type	STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm 190
12	Speed rpm	1400		Designed mm 190
13	No. of Stage	1		Min. mm 190
14	Connection Suction side	DIN 2532	Flow	Operating m³/h
15	Connection Discharge side	DIN 2532		Max- m³/h 63
16	Max Working Pressure bar	10		Min- m³/h 21
17	Shut-off head bar	1.27	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m 6.8
19	Shaft power kW			- (Qmin.) m 12.4
20			Max. Shaft Power at max. impeller kW	1.82
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	AISI 316		
23	Casing	AISI 304		
24	Shaft	AISI 304		
25				
26				
27				

Motor

28	Manufacturer	EPE Standard	Insulation class	F
29	Type	TEFC_3M465-200/2.2R_230_Three Phase	Phases	3~
30	Specific design	IE3 / 50 Hz / Pole pairs 2	Frame size	100
31	Rated power kW	2.2	Weight kg	
32	Number of poles	4	Electric voltage V	230
33	Speed rpm	1400	Electric current A	7.8
34	Degree of protection	IP 55		
35				

Remarks

Performance Curve

Pump Name

3M4 65-200/2.2R

Customer	Date	2024-06-12	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-12 12:10:37	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		4
Impeller diameter designed	mm	190	Speed	rpm	1400

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1mm²/s

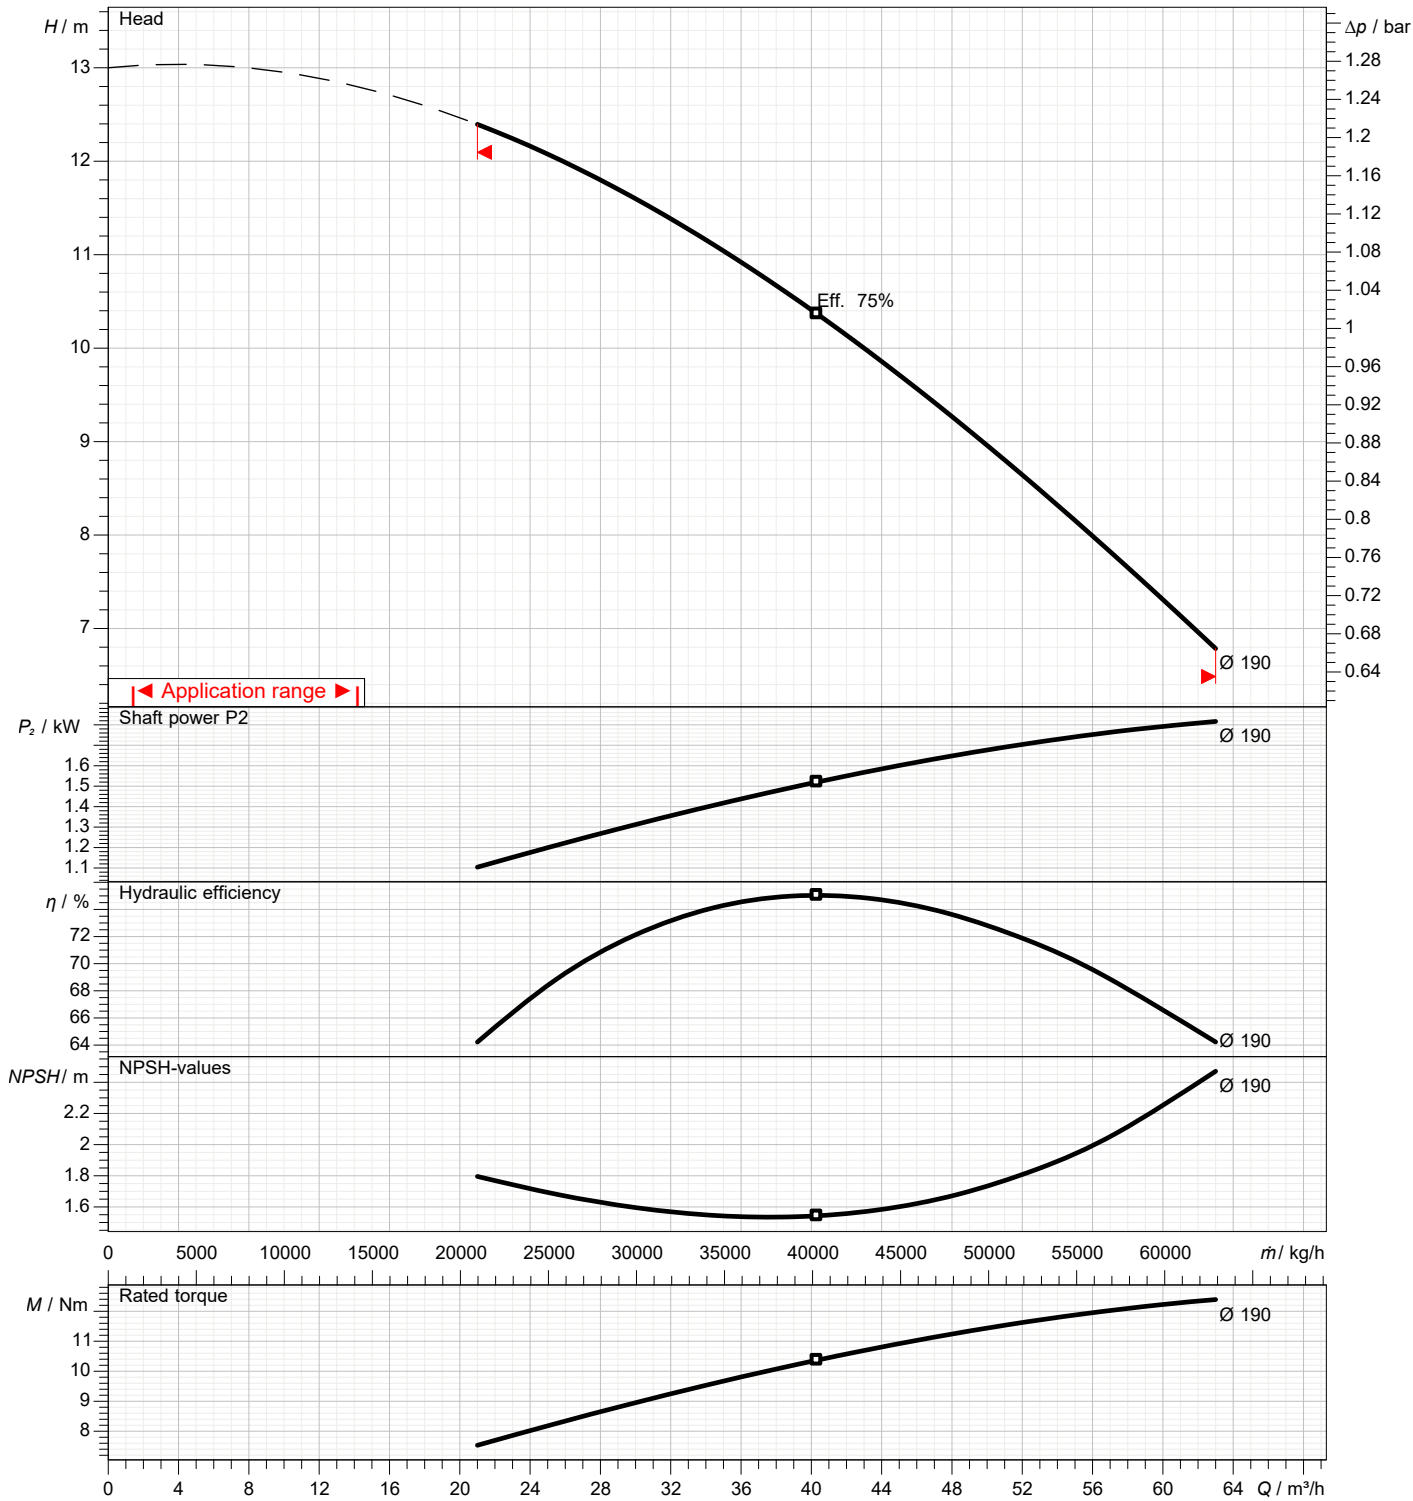

Dimensions

Pump Name 3M4 65-200/2.2R

Customer	Date 2024-06-12	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Project redenumit 2024-06-12 12:10:37	E-mail

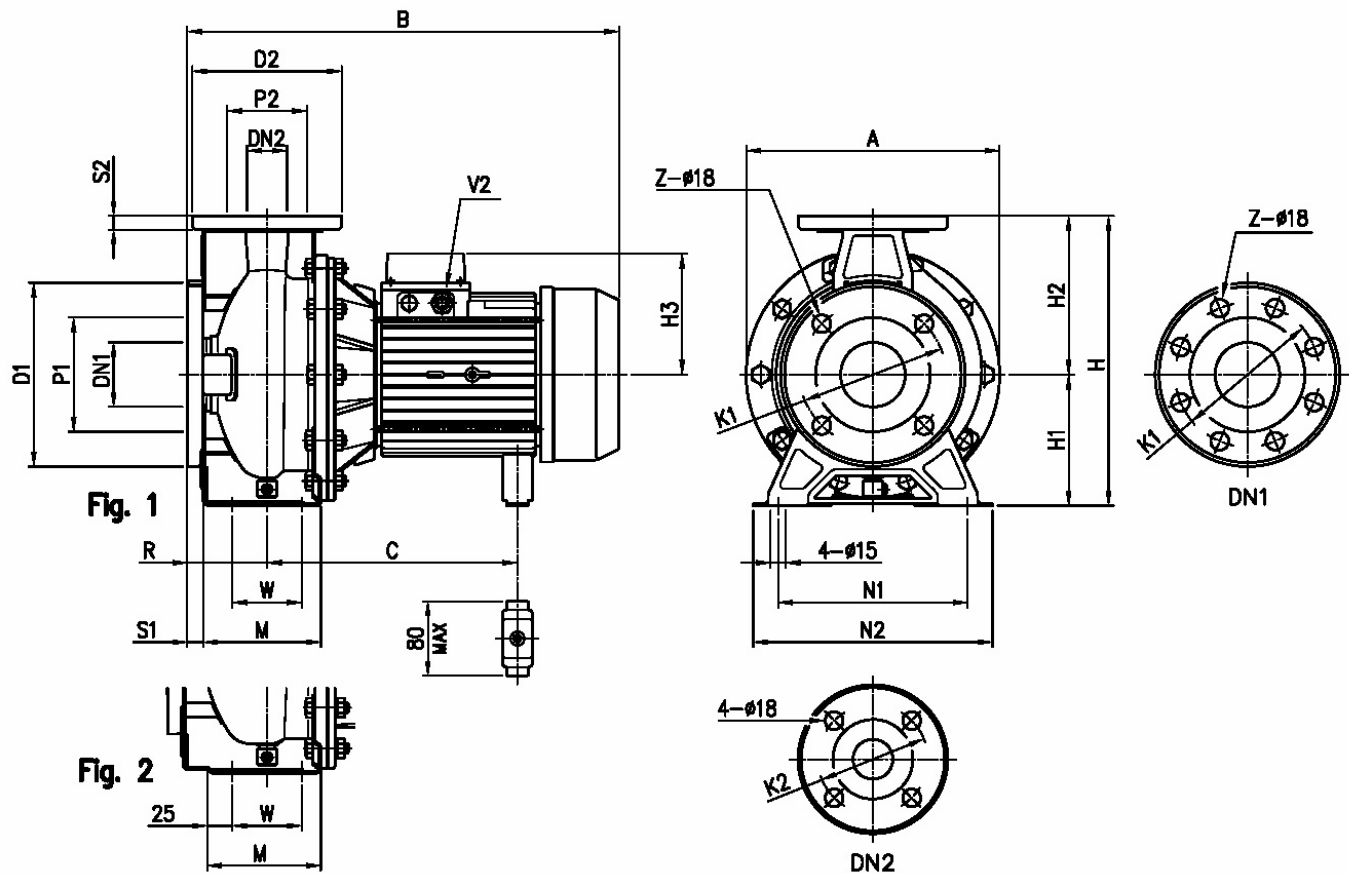

Dimensions in mm									
1	A	296	H3	141					
2	B	474	M	140					
3	C	253	N1	250					
4	Dia D1	200	N2	320					
5	Dia D2	185	R	100					
6	Dia DN1	80	S1	18					
7	Dia DN2	65	S2	16					
8	Dia K1	160	V2	PG 16					
9	Dia K2	145	W	95					
10	Dia P1	134	Weight P&M	30 kg					
11	Dia P2	115	Z	8					
12	Fig	2	Z option	4					
13	H	405							
14	H1	180							
15	H2	225							


(1/3)

Construction

Pump Name

3M4 65-200/2.2R

Customer	Date2024-06-12	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-06-12 12:10:37	E-mail

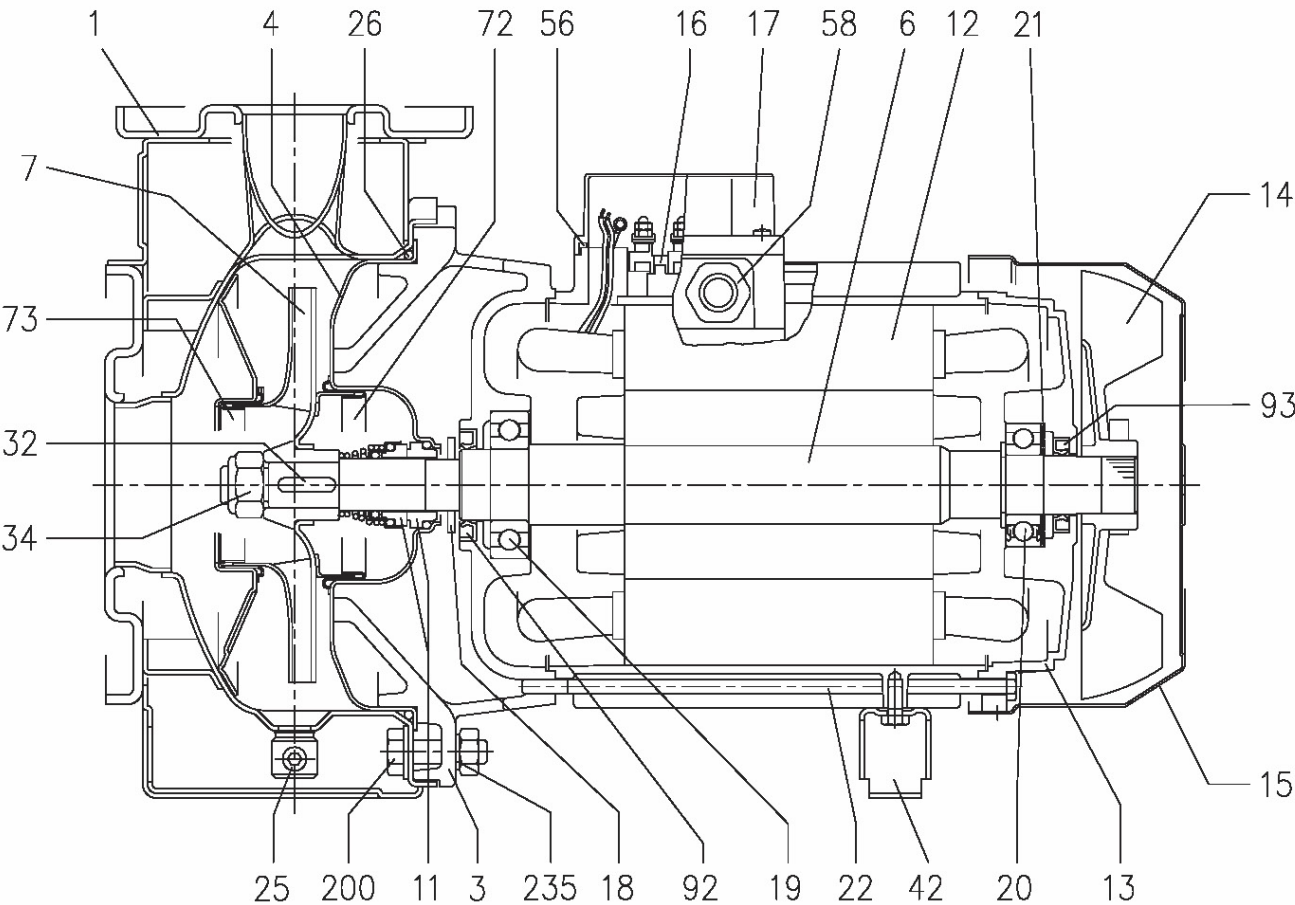

(2/3)

Construction

Pump Name 3M4 65-200/2.2R

Customer	Date	2024-06-12	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-12 12:10:37	E-mail

Nº	PART NAME		MATERIAL		DIMENSIONS	STANDARD	Q.TY
			3M4	3LM4			
1	Casing		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
3	Motor bracket		[5]				1
4	Casing cover		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
6	Shaft with rotor-Part in contact with liquid		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
7	Impeller	32, 40, 50 65-125/160/200	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
			EN 1.4401 (AISI 316)				
11	Mechanical seal	[3]	Carbon/Ceramic/NBR	SiC/SiC/FPM			1
12	Motor frame with stator		-				1
13	Motor cover		Aluminium				1
14	Fan		PA				1
15	Fan cover		Fe P04 Galvanized				1
16	Terminal		-				1
17	Terminal box cover		Aluminium (three phase version)				1
18	Splash ring		NBR	/	40x21.5x3	EBARA DRAWING	1
19	Bearing		-				1
20	Bearing		-				1
21	Adjusting ring		Steel C70				1
22	Tie rod		Fe 42 Galvanized		M5	EBARA DRAWING	4
25	Draing plug		EN 1.4401 (AISI 316) / PTFE		R 1/8" L=8	DIN 906	1
26	O ring	32-125, 40-125	NBR [4]	FPM	158.11x5.34	OR 6625	1
		32-160, 40-160, 50-125, 65-160			183.52x5.34	OR 6720	
		32-200, 40-200,50-160, 50-200, 65-160, 65-200			227.96x5.34	OR 6895	
32	Key		EN 1.4401 (AISI 316)		6x6x25	UNI 6604	1
34	Impeller nut	Other models 50-200/2.2	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)	M16x1.5 M18x1.5	UNI 7474	1
42	Foot		Aluminium / Galvanized steel			EBARA DRAWING	1
56	Box gasket		NBR				1
58	Fasting nut		-				1
72	Casing ring (not for 65 version) [1]		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
73	Casing ring (not for 65 version)		EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)			1
92	O ring	Up to 1.5kW From 2.2kW to 3kW	-	-	25x40x7 30x47X7	DIN 3760 without spring	1
93	O ring	For 0.25kW	-	-	15x30x5	DIN 3760 without spring	1
		For 0.37kW and 0.55kW			17x32X7		
		From 0.75 kW to 3kW			25x40x7		
200	Screw	32-125, 40-125	Stainless steel A2 70 class ISO 3506/1		M 8x30	UNI 5739	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			M 10x35		[2]
235	Washer	32-125, 40-125	EN 1.4301 (AISI 304)		8.4x17	UNI 6592	8
		40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200			10.5x21		[2]

[1] For version 32-200, 40-200, 50-160 , 50-200

[2] Quantity = 10 for 32-160, 40-160, 50-125, 65-125

Quantity = 12 for 32-200, 40-200, 50-160, 50-200, 65-160, 65-200

[3] Special version: see CONSTRUCTION 3

[4] FPM for H-HS-HW-HSW version

EPDM for E version, Q1AEGG, U3U3EGG, Q1Q1EGG, Q1U3EGG, U3CEGG

[5] Cast iron EN-GJL-200-EN 1561 for 32-200/3 and models with 15, 18.5, 22 kW motor

Aluminum AL-EN-1706-AC-46000-D for all the others


(3/3)

Construction

Pump Name

3M4 65-200/2.2R

Customer	Date2024-06-12	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-06-12 12:10:37	E-mail

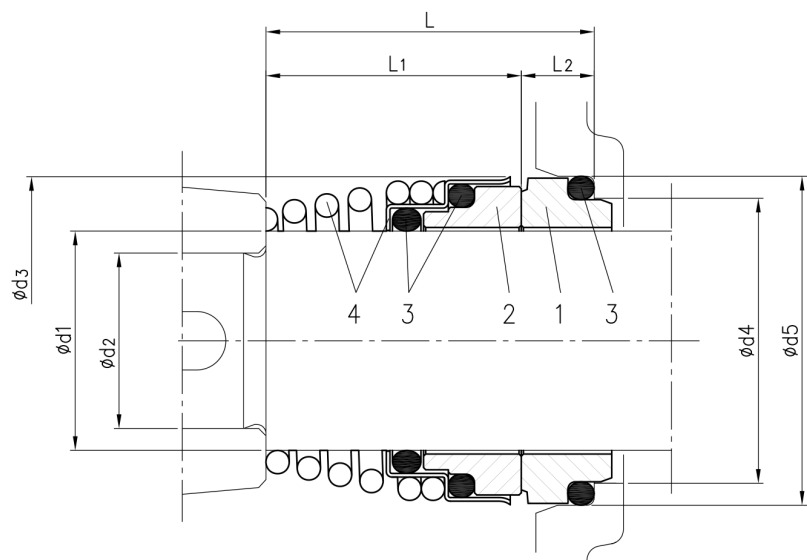

Version	Pump type	Dimensions								Material			
		d1	d2	d3	d4	d5	L	L1	L2	1 Stationary seal ring	2 Rotary seal ring	3 Rubber	4 Frame + spring
Standard	32-125/160/200 40-125/160/200 50-125/160/200 65-125/160/200	22	19	38	31	37	37.5	27.5	10	Carbon	Ceramic	NBR	EN 1.4401 (AISI 316)