

Technical Data

Pump Name

CDXM 70/076

Customer	Date	2024-07-01	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-07-01 15:55:48	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity mm²/s	1.005
4	Head m		Vapour pressure bar	0.0234
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump Name	CDXM 70/076	Frequency Hz	60
10	Design	CENTRIFUGAL PUMPS	Installation type	STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm 115
12	Speed rpm	3450		Designed mm 115
13	No. of Stage	1		Min. mm 115
14	Connection Suction side	UNI ISO 228-1	Flow	Operating m³/h
15	Connection Discharge side	UNI ISO 228-1		Max- m³/h 5.4
16	Max Working Pressure bar	8		Min- m³/h 1.2
17	Shut-off head bar	2.30	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m 16.5
19	Shaft power kW			- (Qmin.) m 22.2
20			Max. Shaft Power at max. impeller kW	0.44
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	AISI 304		
23	Casing	AISI 304		
24	Shaft	AISI 303 (wet extension)		
25				
26				
27				

Motor

28	Manufacturer	EPE Standard	Insulation class	F
29	Type	TEFC_CDXM 70/076_110_Single Phase	Phases	1~
30	Specific design	- / 60 Hz / Pole pairs 1	Frame size	
31	Rated power kW	0.55	Weight kg	
32	Number of poles	2	Electric voltage V	110
33	Speed rpm	3450	Electric current A	7.5
34	Degree of protection	IP 55		
35				

Remarks

Performance Curve

Pump Name

CDXM 70/076

Customer	Date	2024-07-01	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-07-01 15:55:48	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	60
Operating head	m		Number of poles		2
Impeller diameter designed	mm	115	Speed	rpm	3450

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1mm²/s

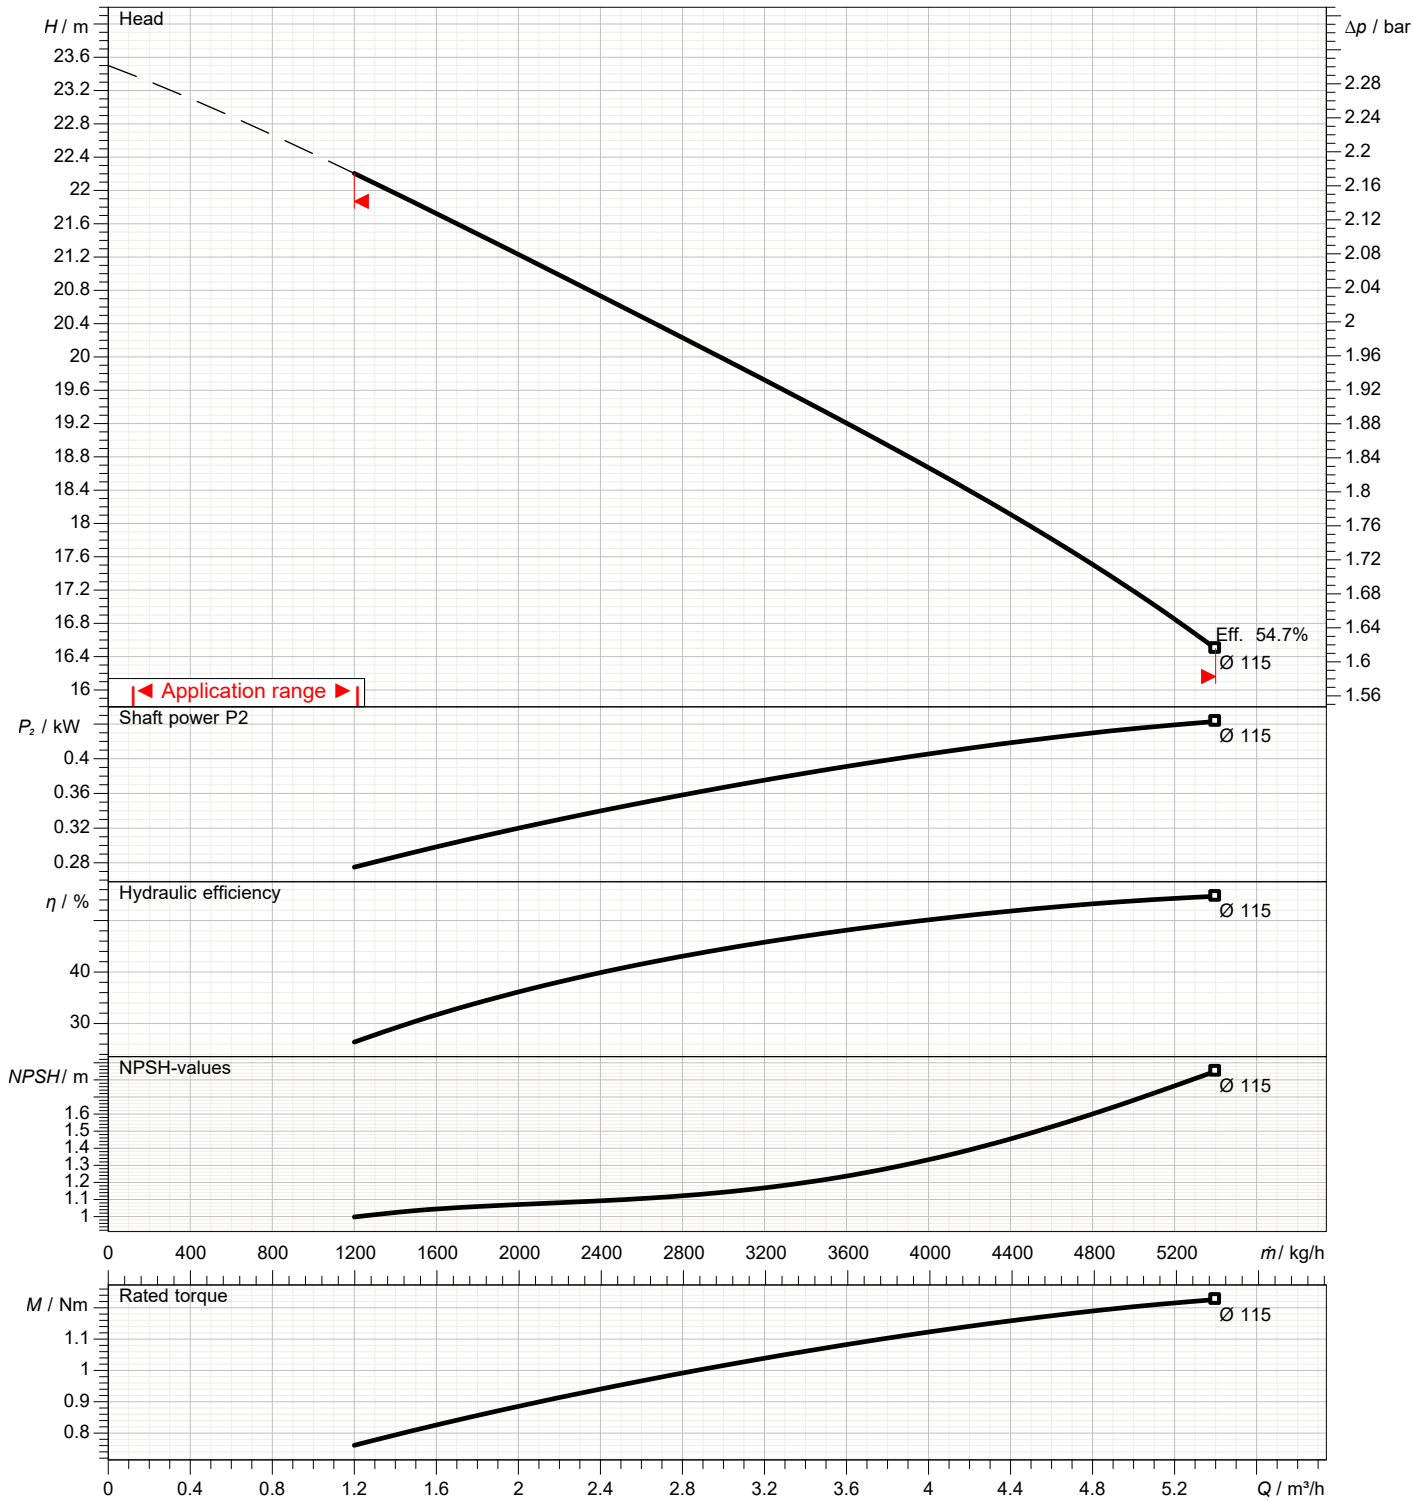

Dimensions

Pump Name CDXM 70/076

Customer	Date2024-07-01	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-01 15:55:48	E-mail

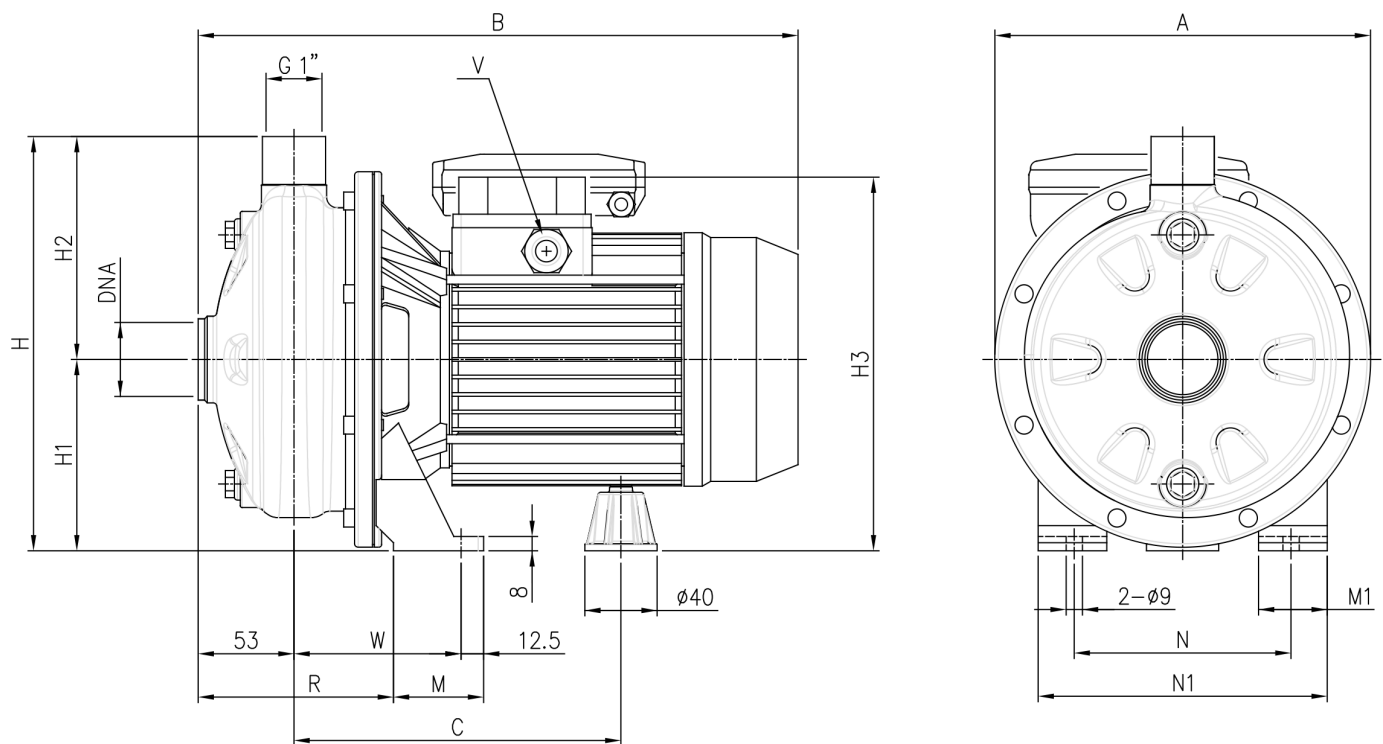

Dimensions in		mm						
1	A	208	Weight P&M	8 kg				
2	B	320						
3	C	181						
4	DNA	G 1 1/4						
5	H	229.5						
6	H1	106						
7	H2	123.5						
8	H3	207						
9	M	50						
10	M1	38						
11	N	120						
12	N1	160						
13	R	108						
14	V	PG 11						
15	W	92.5						


(1/3)

Construction

Pump Name

CDXM 70/076

Customer	Date2024-07-01	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-01 15:55:48	E-mail

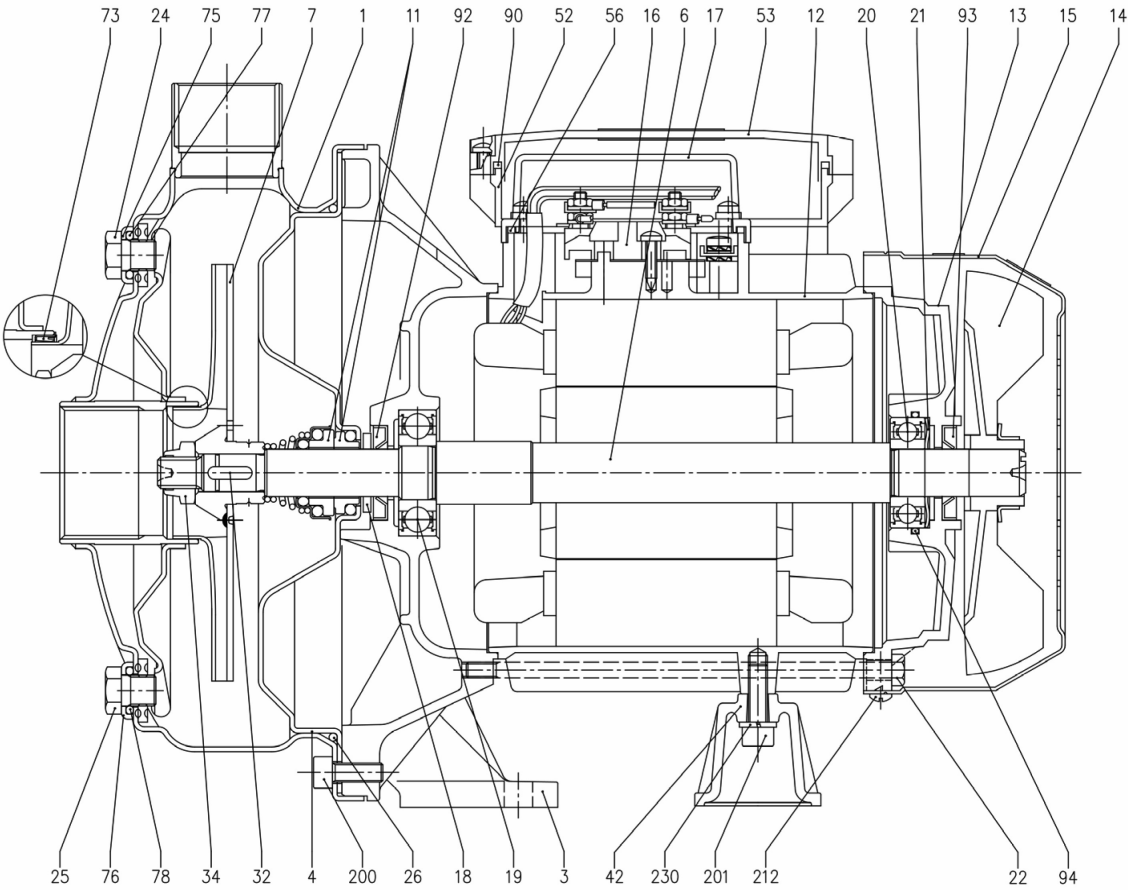

(2/3)

Construction

Pump Name CDXM 70/076

Customer	Date 2024-07-01	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Proiect redenumit 2024-07-01 15:55:48	E-mail

N°	PART NAME	MATERIAL	Q.TY
1	Casing	AISI 304 / AISI 316L [7]	1
3	Motor bracket	Aluminium	1
4	Casing cover	AISI 304 / AISI 316L [7]	1
6	Shaft with rotor	AISI 303 / AISI 316L [7] (Wet extension)	1
7	Impeller	AISI 304 / AISI 316L [7]	1
11	Mechanical seal [8]	Carbon/Ceramic/NBR	1
12	Motor frame with stator	-	1
13	Motor cover	Aluminium	1
14	Fan	PA	1
15	Fan cover	Fe P04 Zincate	1
16	Terminal board	-	1
17	Terminal box cover [2]	Aluminium	1
18	Splash ring	NBR	1
19	Pump side ball bearing	-	1
20	Fan side ball bearing	-	1
21	Adjusting ring	Steel C70	1
22	Tie rod	Fe 420 Zincate	4
23	Capacitor [1]	-	1
24	Priming plug	AISI 303 / AISI 316 [7]	1

N°	PART NAME	MATERIAL	Q.TY
26	O-Ring [3]	NBR	1
32	Key	AISI 316	1
34	Impeller nut	AISI 304 / AISI 316 [7]	1
42	Motor support	Aluminium	1
52	Terminal box [1]	ABS class V0	1
53	Terminal box cover [5]	ABS class V0	1
56	Box gasket	NBR	1
73	Casing ring [4]	AISI 304 / AISI 316L [7]	1
75	Washer	AISI 304	1
76	Washer	AISI 304	1
77	O-Ring [3]	NBR	1
78	O-Ring [3]	NBR	1
90	Terminal box cover gasket [6]	NBR	1
92	Lip seal	-	1
93	Lip seal	-	1
94	O-Ring [9]	NBR	1
110	Protector [1]	-	1
200	Screw	Stainless steel A2 UNI7323	8
201	Screw	Zincate Steel	4
212	Screw	Zincate Steel	1

- [1] Only for single phase
[2] Only for three phase
[3] FPM for H-HS-HW-HSW
EPDM for E and Special Mechanical Seal
[4] NBR for CDX 70/076-70/106-70/156
FPM for H-HS-HW-HSW version of the CDX 70/076-70/106-70/156
[5] With gasket in NBR only for version single phase CDXM 70/076, 70/106, 70/156, 120/106, 120/156, 200/156
[6] Only for version single phase CDXM 120/206, 200/206
[7] Only for "L" version
[8] See CONSTRUCTION 3
[9] Only for CDX 70/156, CDX 120/156, CDX 200/156 (three phase)


(3/3)

Construction

Pump Name

CDXM 70/076

Customer	Date2024-07-01	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-07-01 15:55:48	E-mail

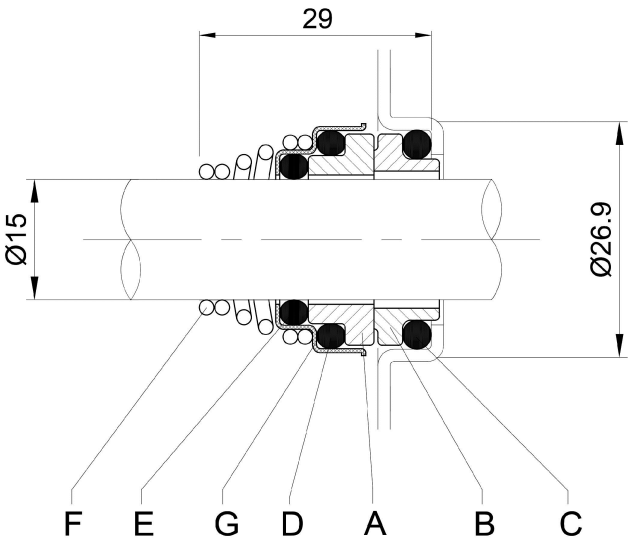

REF	PART NAME	MATERIAL Standard and L version
A	Rotary seal ring	Ceramic
B	Stationary seal ring	Carbon graphite
C	O-Ring	NBR
D	O-Ring	NBR
E	O-Ring	NBR
F	Self-driving spring	AISI 316
G	Frame	AISI 304