

Technical Data

Pump Name

CMB 1.50 M

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-13 13:12:02	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity mm²/s	1.005
4	Head m		Vapour pressure bar	0.0234
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump Name	CMB 1.50 M	Frequency Hz	50
10	Design	CENTRIFUGAL PUMPS	Installation type	STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm 132
12	Speed rpm	2800		Designed mm 132
13	No. of Stage	1		Min. mm 132
14	Connection Suction side	UNI ISO 228	Flow	Operating m³/h
15	Connection Discharge side	UNI ISO 228		Max- m³/h 16.8
16	Max Working Pressure bar	6		Min- m³/h 6
17	Shut-off head bar	2.19	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m 16.2
19	Shaft power kW			- (Qmin.) m 22.5
20			Max. Shaft Power at max. impeller kW	1.28
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	Cast iron		
23	Casing	Cast iron		
24	Shaft	AISI 303 (wet extension)		
25				
26				
27				

Motor

28	Manufacturer	EPE Standard	Insulation class	F
29	Type	TEFC_CMB 1.50 M_230_Single Phase	Phases	1~
30	Specific design	IE2 / 50 Hz / Pole pairs 1	Frame size	
31	Rated power kW	1.1	Weight kg	
32	Number of poles	2	Electric voltage V	230
33	Speed rpm	2800	Electric current A	9
34	Degree of protection	IP 44		
35				

Remarks

Performance Curve

Pump Name

CMB 1.50 M

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-13 13:12:02	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	50
Operating head	m		Number of poles		2
Impeller diameter designed	mm	132	Speed	rpm	2800

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1mm²/s

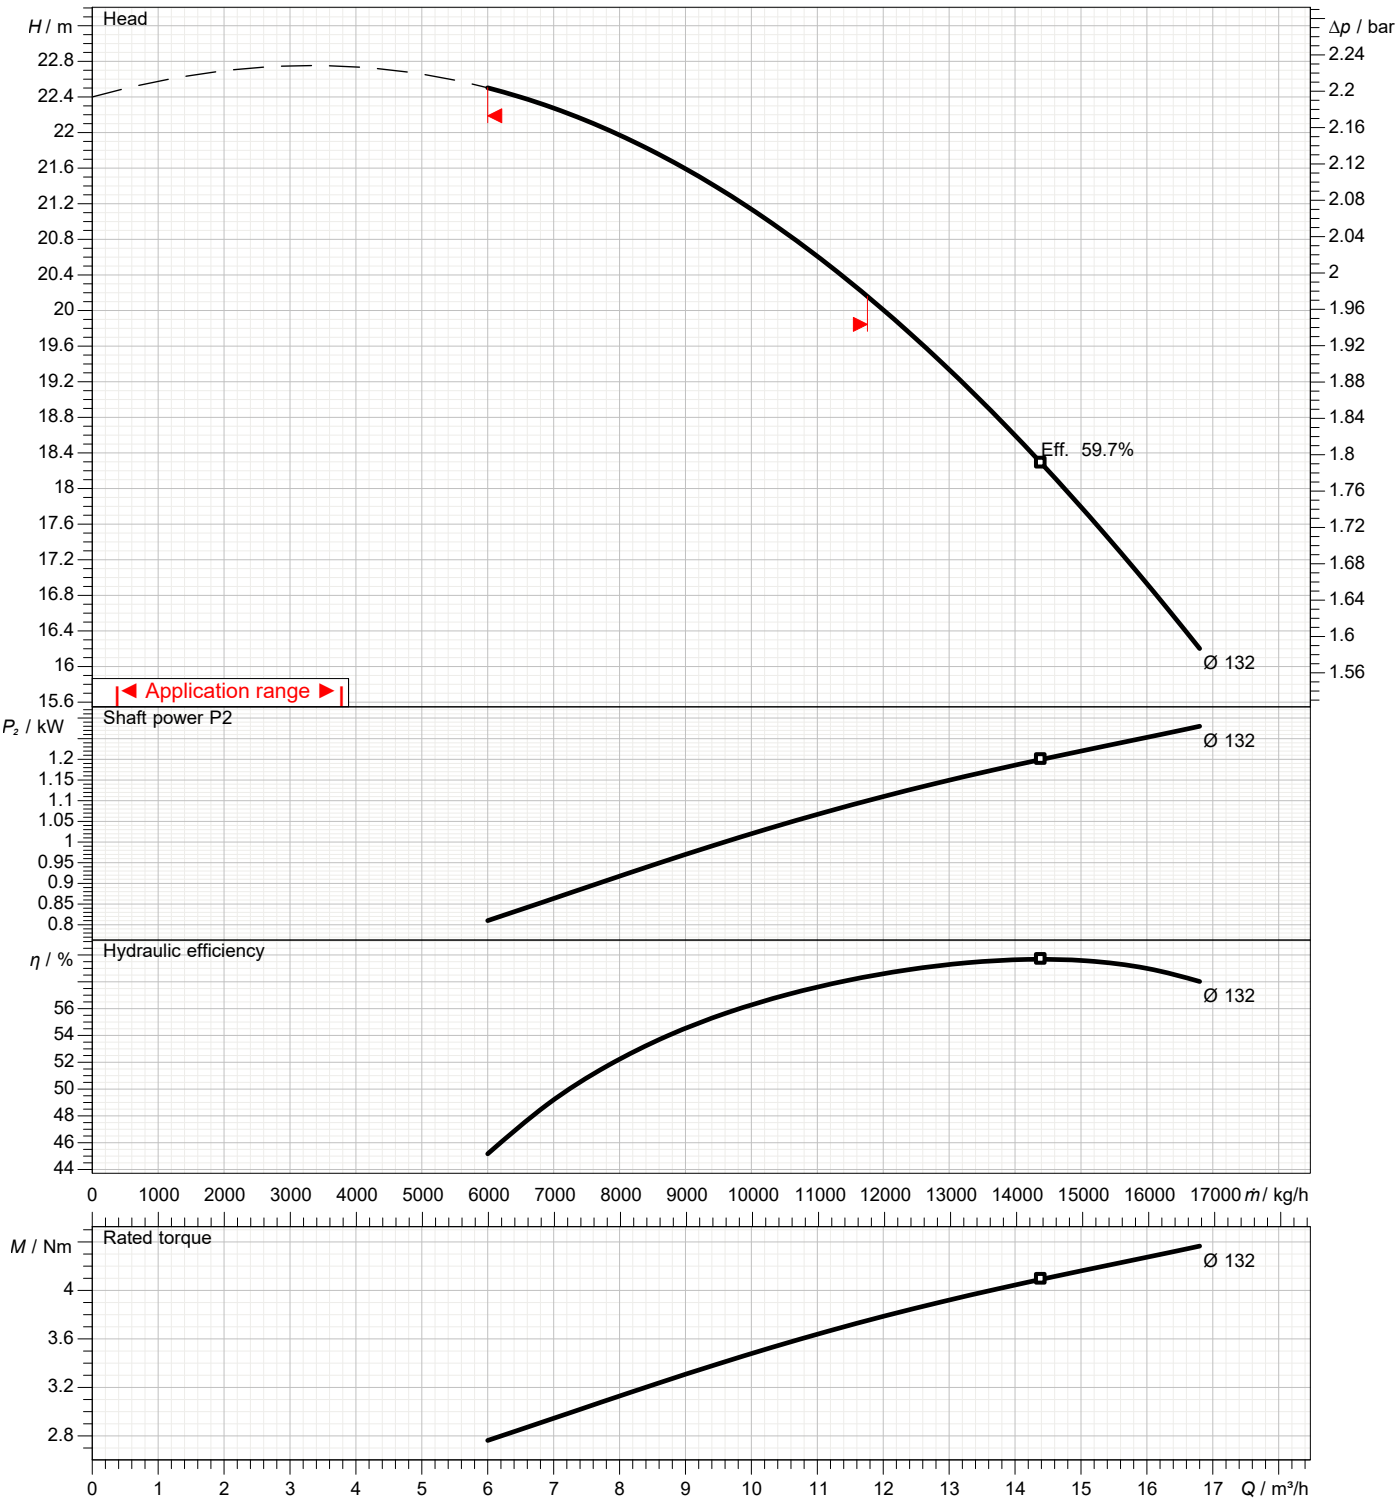

Dimensions

Pump Name CMB 1.50 M

Customer	Date2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-06-13 13:12:02	E-mail

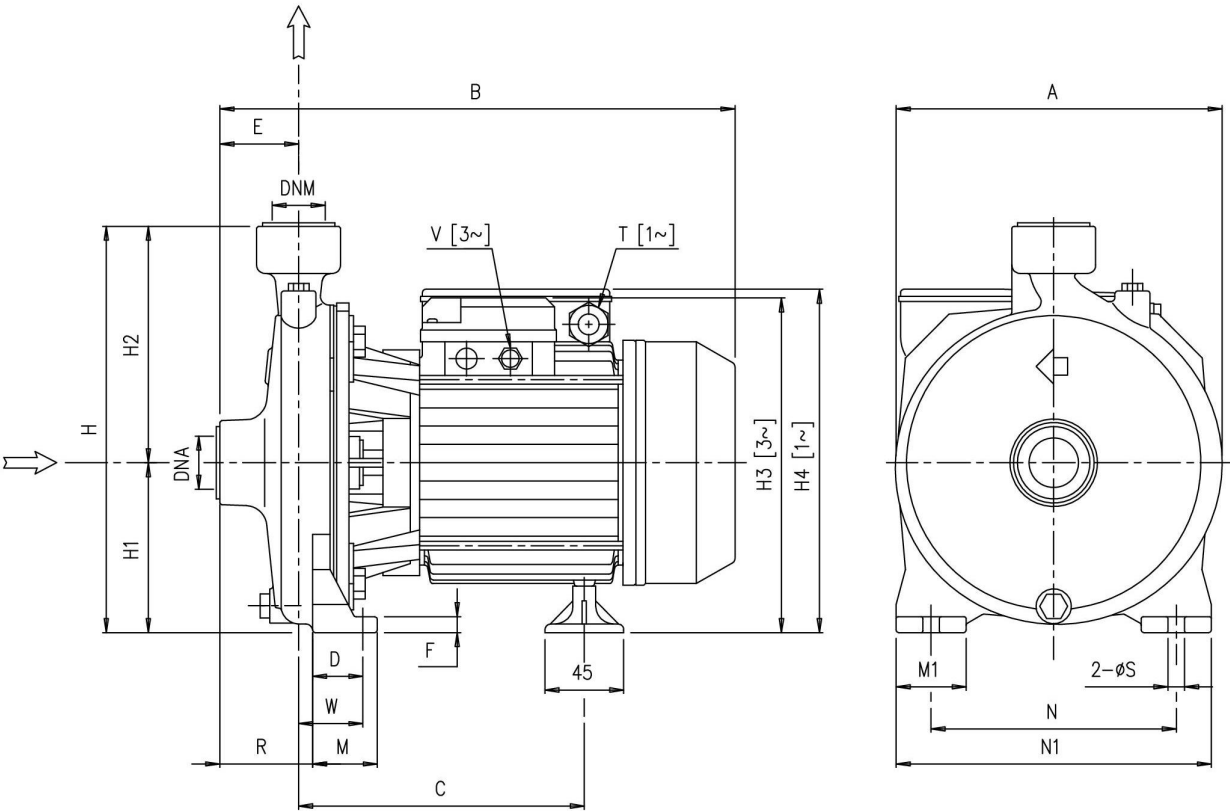

[1~] Single phase
[3~] Three phase

Dimensions in mm							
1	A	188	N1	180			
2	B	374	R	65.5			
3	C	206.3	S	9.5			
4	D	36.8	T	PG 13.5			
5	DNA	G 2	W	52.8			
6	DNM	G 1 1/4	Weight P&M	19.4kg			
7	E	49.5					
8	F	9					
9	H	251.5					
10	H1	101.5					
11	H2	150					
12	H4	233.5					
13	M	63					
14	M1	40					
15	N	140					


(1/3)

Construction

Pump Name

CMB 1.50 M

Customer	Date2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-06-13 13:12:02	E-mail

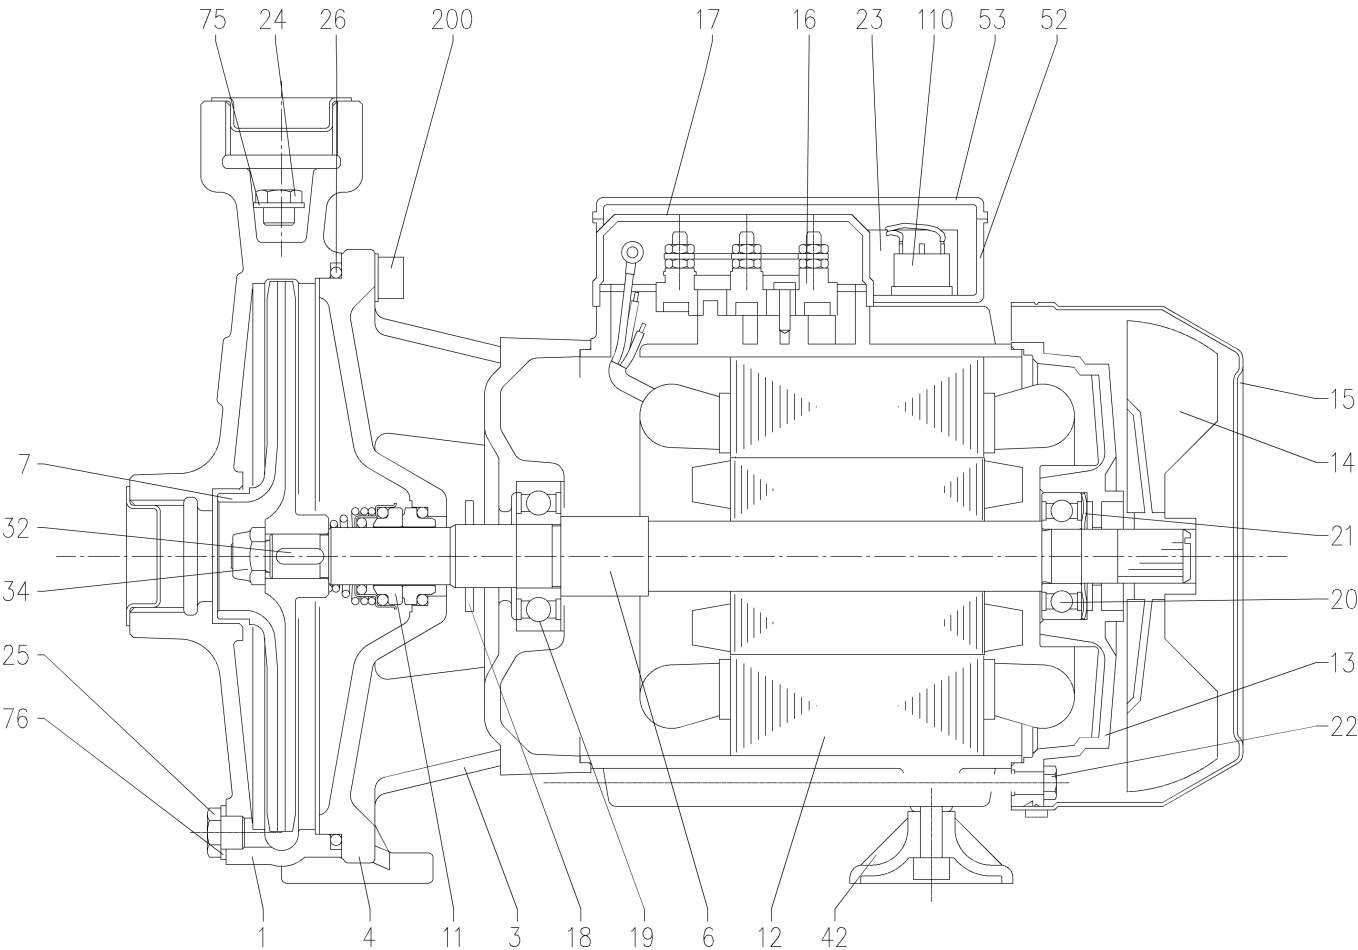

(2/3)

Construction

Pump Name CMB 1.50 M

Customer	Date 2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Project redenumit 2024-06-13 13:12:02	E-mail

N°	PART NAME		MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing		Cast iron			1
3	Motor bracket		Cast iron			1
4	Casing cover		AISI 304			1
6	Shaft with rotor		[1]			1
7	Impeller		[2]			1
11	Mechanical seal [5]		Carbon/Ceramic/NBR			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal board		-			1
17	Terminal box cover [3]		Aluminium			1
18	Splash ring		NBR	D35x19.5x2.5	EBARA DRAWING	1
19	Pump side ball bearing		-			1
20	Fan side ball bearing		-			1
21	Adjusting ring		Steel C70			1
22	Tie rod		Fe 42 Galvanized			4
23	Capacitor [4]		-			1
24	Priming plug	CMD 1.50; 2.00; 3.00; 4.00	Brass	G 1/4"	UNI 338	1
		other models		G 1/8"		
25	Drain plug	CMD 1.50; 2.00; 3.00; 4.00	Brass	G 1/4"	UNI 338	1
		other models		G 1/8"		
26	O-ring		NBR			1
32	Key		AISI 316			1
34	Impeller nut	other models	AISI 304	M10	UNI 7474	1
		CMB 4.00; 5.50		M12x1.25		1
42	Foot		PP			1
52	Capacitor box [4]		ABS class V-0			1
53	Capacitor box cover [4]		ABS class V-0			1
75	Washer	CMD 1.50; 2.00; 3.00; 4.00	Aluminium	13.5x19x1.5		1
		other models		10x16x1.5		1
76	Washer	CMD 1.50; 2.00; 3.00; 4.00	Aluminium	13.5x19x1.5		1
		other models		10x16x1.5		1
110	Protector [4]		-			1
200	Screw	CMD 1.50; 2.00; 3.00; 4.00	Zn Steel Cl. 8.8	M8x25	ISO 898-1	4
		CMB 1.50; 2.00; 3.00		M8x22		
		CMA 1.50		M10x35		

[1] Material: AISI303 (wet extension) for version CMA, CMB 1.50-2.00-3.00, CMD 1.50-2.00-3.00
 AISI304 (wet extension) for version CMB 4.00-5.50, CMD 4.00

[2] Material: Brass for version: CMA, CMB 2.00-3.00-4.00-5.50
 Cast iron for version: CMB 1.50, CMD

[3] Only for three phase

[4] Only for single phase

[5] See **CONSTRUCTION 3**


(3/3)

Construction

Pump Name

CMB 1.50 M

Customer	Date2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-06-13 13:12:02	E-mail

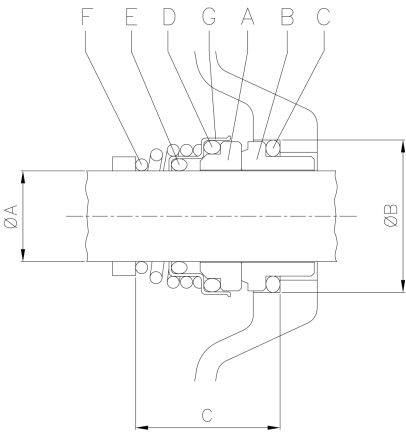

Pump type		Dimensions mm		
Single phase	Three phase	Ø A	Ø B	C
CMA 1.50 M	CMA 1.50 T	18	30.9	32
CMA 2.00 M	CMA 2.00 T	18	30.9	32
-	CMA 3.00 T	18	30.9	32
CMB 1.50 M	CMB 1.50 T	18	30.9	32
CMB 2.00 M	CMB 2.00 T	18	30.9	32
-	CMB 3.00 T	18	30.9	32
CMD 1.50 M	CMD 1.50 T	18	30.9	32
CMD 2.00 M	CMD 2.00 T	18	30.9	32
-	CMD 3.00 T	18	30.9	32
-	CMD 4.00 T	18	30.9	32

REF	PART NAME	MATERIAL
		product standard
A	Rotary seal ring	ceramic
B	Stationary seal ring	carbon graphite
C	O Ring	NBR
D	O Ring	NBR
E	O Ring	NBR
F	Self driving spring	AISI 316
G	Frame	AISI 304