

Technical Data

Pump Name

MMD4 50-125/0.376 QQPFF

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-07-02 22:34:28	E-mail

Requested data

1	Pump type	CENTRIFUGAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature	°C
3	Flow	m³/h	Kin. viscosity	mm²/s
4	Head	m	Vapour pressure	bar
5	Geodetic head	m	PH value	
6	Inlet pressure (pin)	bar	Density	kg/m³
7	Available system NPSH		Solids	Weight %
8	Ambient temperature	°C		

Pump

9	Pump Name	MMD4 50-125/0.376 QQPFF	Frequency	Hz	60
10	Design	CENTRIFUGAL PUMPS	Installation type		STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm	112
12	Speed	rpm		Designed mm	112
13	No. of Stage	1		Min. mm	112
14	Connection	Suction side	Flow	Operating m³/h	
15	Connection	Discharge side		Max- m³/h	30
16	Max Working Pressure	bar		Min- m³/h	6.96
17	Shut-off head	bar	Head	Operating m	
18	Total weight	kg		- (Qmax.) m	3.0
19	Shaft power	kW		- (Qmin.) m	5.3
20			Max. Shaft Power at max. impeller	kW	0.37
21	Required pump NPSH	m	Efficiency	%	

Materials

22	Impeller	EN-GJL-200		
23	Intermediate casing	EN-GJL-200		
24	Bottom casing	EN-GJL-200		
25	Shaft	Stainless steel		
26	Gasket	AF1600		
27				

Motor

28	Manufacturer	ICME	Insulation class	F
29	Type	TEFC_MMD4 50-125/0.376_265_Three Phase	Phases	3~
30	Specific design	IE1 / 60 Hz / Pole pairs 2	Frame size	71
31	Rated power	kW	Weight	kg
32	Number of poles	4	Electric voltage	V
33	Speed	rpm	Electric current	A
34	Degree of protection	IP 55		
35				

Remarks

Performance Curve

Pump Name

MMD4 50-125/0.376 QQPFF

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-07-02 22:34:28	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	60
Operating head	m		Number of poles		4
Impeller diameter designed	mm	112	Speed	rpm	1750

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1mm²/s

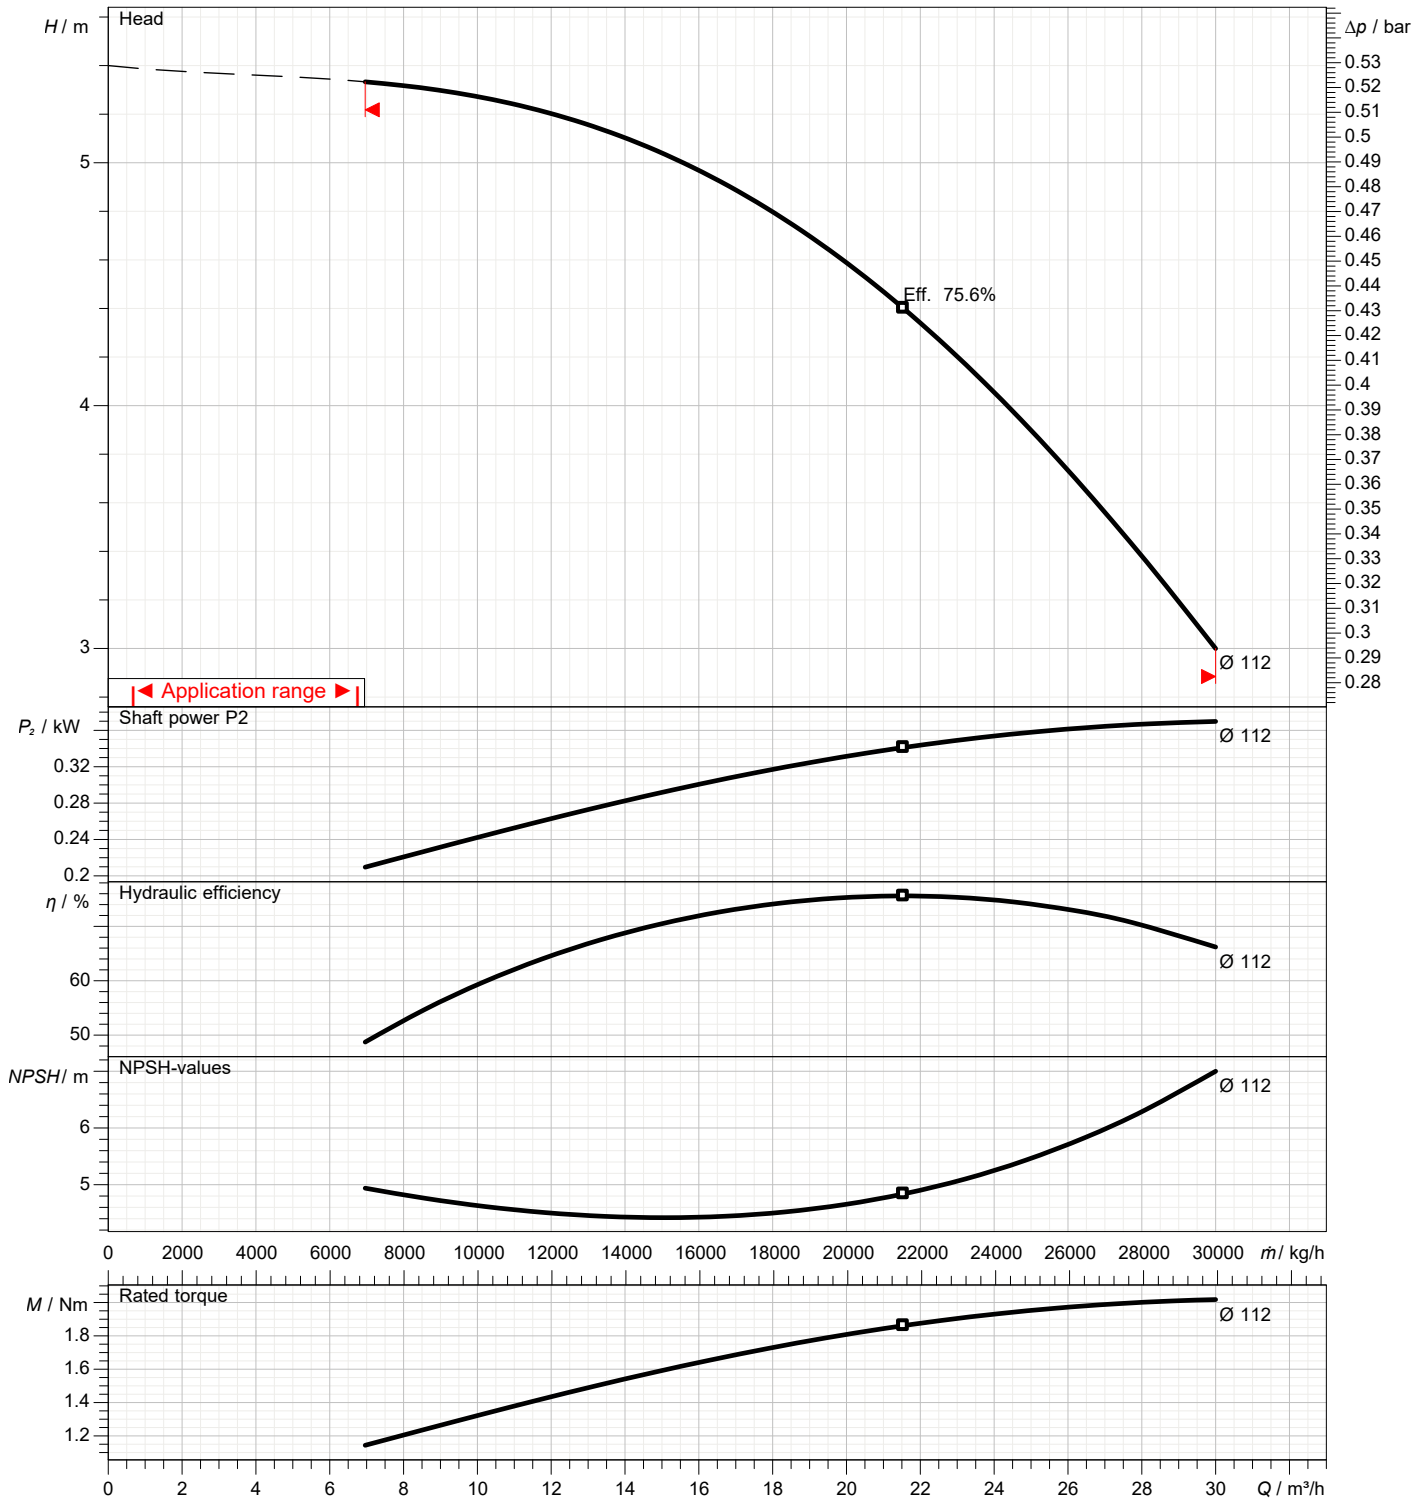

Dimensions

Pump name MMD4 50-125/0.376 QQPFF

Customer	Date 2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Proiect redenumit 2024-07-02 22:34:28	E-mail

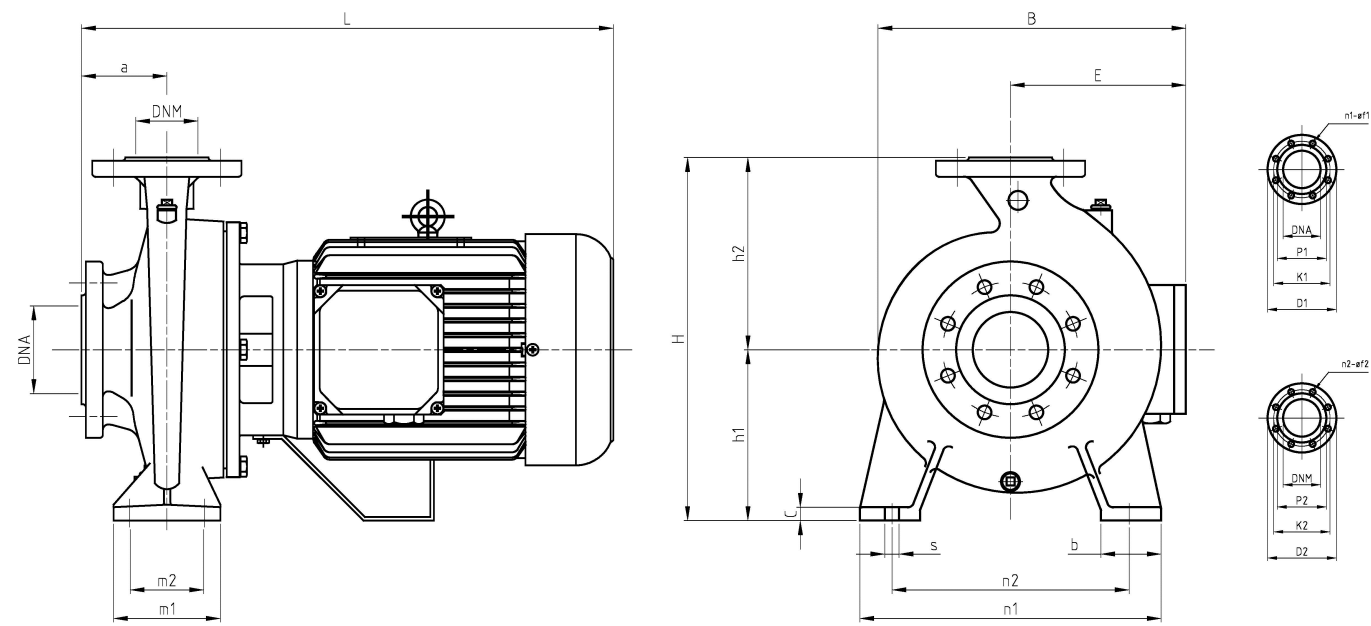

Dimensions in mm								
1	a	100	Dia P2	102				
2	b	50	E	110				
3	B	246	H	292				
4	C	12	h1	132				
5	Dia D1	185	h2	160				
6	Dia D2	165	L	425				
7	Dia DNA	65	m1	100				
8	Dia DNM	50	m2	70				
9	Dia f1	18	n1	240				
10	Dia f2	18	n2	190				
11	Dia K1	145	s	14				
12	Dia K2	125	Weight P&M	25 kg				
13	Dia n1	4						
14	Dia n2	4						
15	Dia P1	122						


(1/2)

Construction

Pump name

MMD4 50-125/0.376 QQPFF

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-07-02 22:34:28	E-mail

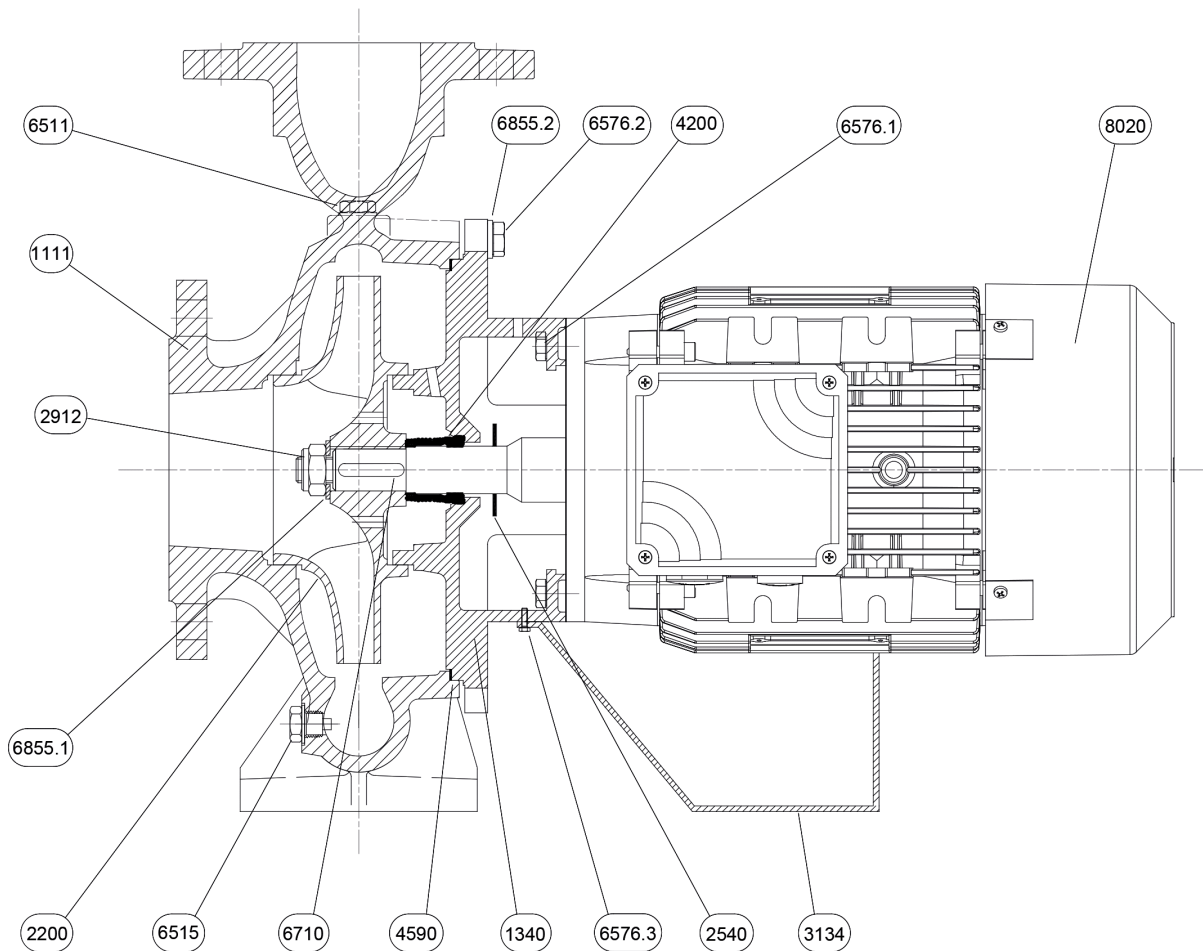

N°	PART NAME	MATERIAL	Q.TY
1111	Pump casing	EN-GJL-200	1
1340	Latern-Cover	EN-GJL-200	1
2200	Impeller	EN-GJL-200	1
2540	Baffle	NB 70	1
2912	Impeller nut	6.8-ZN	1
3134	Support foot	S235JR	1
4200	Mechanical seal	Sic/Sic/NBR/AISI 304	1
4590	Gasket	AF 1600	1
6511	Refil plug	EN GJMB-350-10	1
6515	Drain plug	EN GJMB-350-10	1
6576.1	Hexagonal head screw	8.8-ZN	4
6576.2	Hexagonal head screw	8.8-ZN	4
6576.3	Hexagonal head screw	8.8-ZN	1
6710	Key	C50	1
6855.1	Impeller washer	R40-ZN	1
6855.2	Washer	R40-ZN	4
8020	Motor		1


(2/2)

Construction

Pump name

MMD4 50-125/0.376 QQPFF

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-02 22:34:28	E-mail

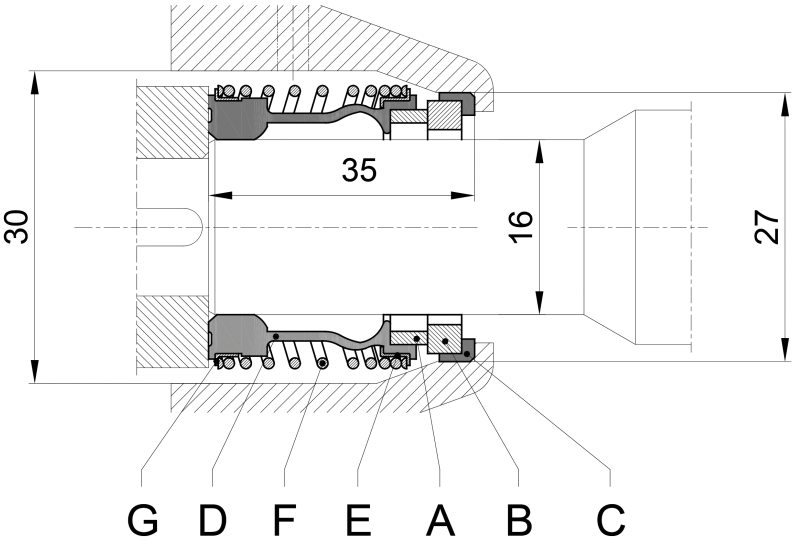

Ref.	Name	Material
A	Rotary seal ring	Carbon
B	Stationary seal ring	Silicon Carbide
C	Gasket	EPDM
D	Bellows	EPDM
E	Spring plate	AISI 304
F	Spring	AISI 304
G	Spring plate	AISI 304