

Technical data

Pump name

OY 4N15-16/7,56

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-07-02 22:34:28	E-mail

Requested data

1	Pump type	SUBMERSIBLE MULTISTAGE PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity mm²/s	1.005
4	Head m		Vapour pressure bar	0.0234
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump name	OY 4N15-16/7,56	Frequency Hz	60
10	Design	SUBMERSIBLE MULTISTAGE PUMPS	Installation type	with EBARA MOTOR OIL - three phase
11	Manufacturer	EBARA	Impeller Diameter	Max. mm 78
12	Speed rpm	3450		Designed mm 78
13	No. of Stage	16		Min. mm 78
14	Connection Suction side		Flow	Operating m³/h
15	Connection Discharge side	UNI ISO 228		Max- m³/h 25.2
16	Max Working Pressure bar			Min- m³/h 7.2
17	Shut-off head bar	14.81	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m 54.3
19	Shaft power kW	(Power / Stage)		- (Qmin.) m 141.5
20			Max. Shaft Power at max. impeller kW	7.30 (Power / Stage)
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	Glass fibre Reinforced PC		
23	Casing	EN 1.4301 (AISI 304)		
24	Shaft	EN 1.4301 (AISI 304)		
25				
26				
27				

Motor

28	Manufacturer	EBARA MOTOR	Insulation class	F
29	Type	4N15-16/7,56_380_Three Phase	Phases	3~
30	Specific design	Submersible oil filled type / 60 Hz / Pole pairs 1	Frame size	
31	Rated power kW	7.5	Weight kg	27
32	Number of poles	2	Electric voltage V	380
33	Speed rpm	3420	Electric current A	17.2
34	Degree of protection	IP 68		
35				

Remarks

Performance curve

Pump name

OY 4N15-16/7,56

Customer	Date	2024-07-02	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-07-02 22:34:28	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Frequency	Hz	60	
Operating head	m		Number of poles		2	
Impeller Diameter	Designed	mm	78	Speed	rpm	3450

Test standard: ISO 9906:2012 - Grade3B

Water; 20°C; 998.3kg/m³; 1mm²/s

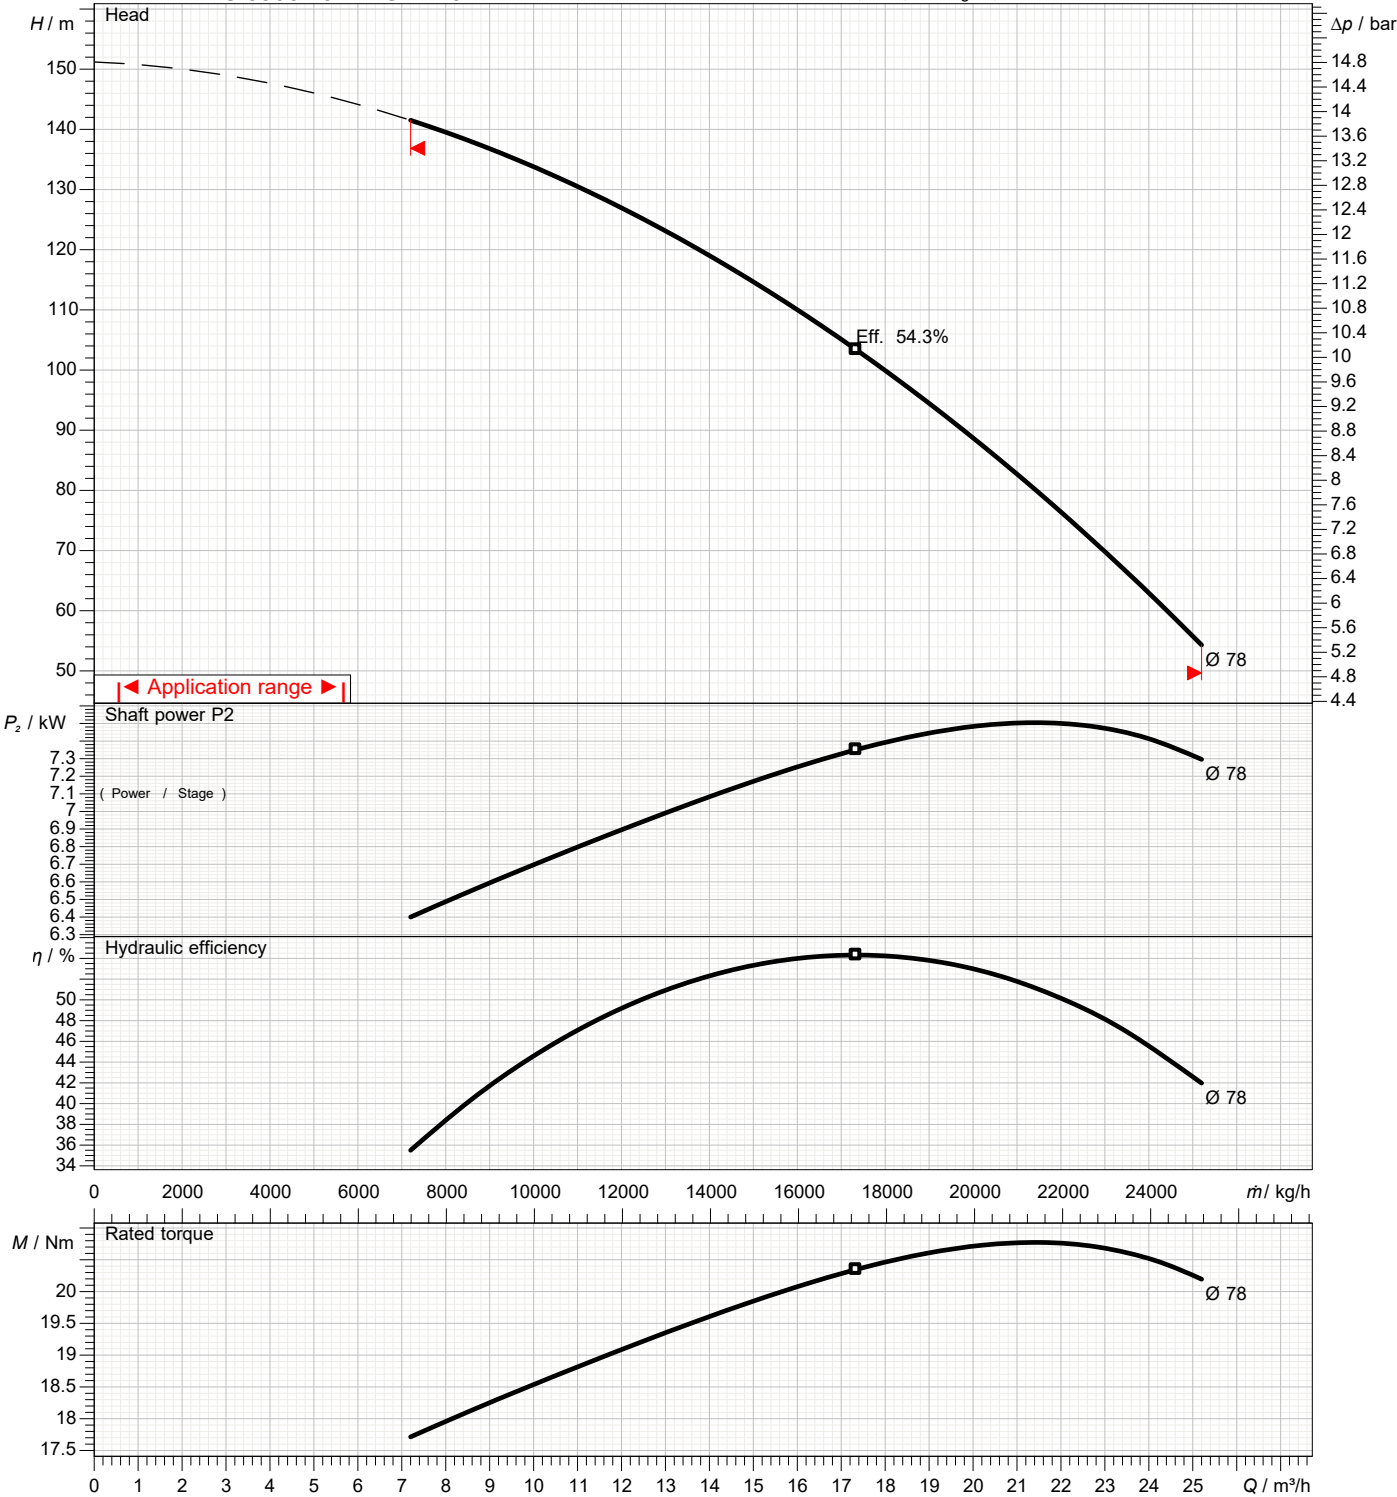


EBARA

Dimensions

Pump name OY 4N15-16/7,56

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-02 22:34:28	E-mail

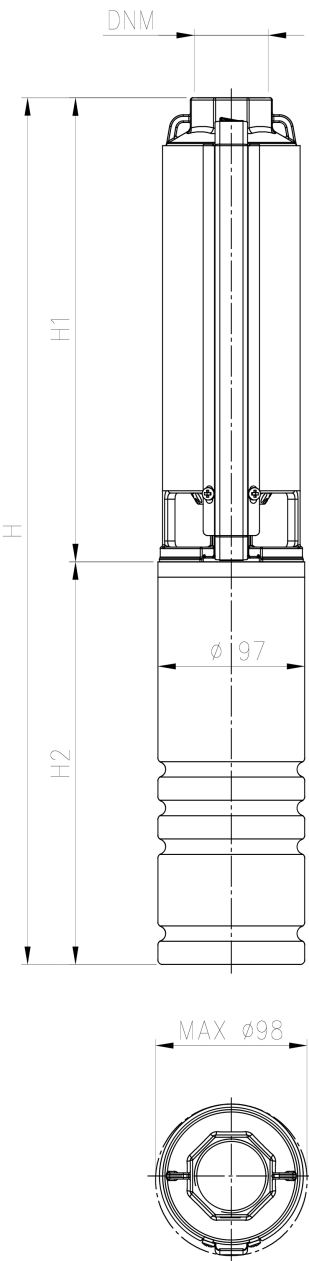

Dimensions in mm							
1	DNM	G 2					
2	H	2065					
3	H1	1260					
4	H2	805					
5	Weight P&M	34,5 kg					
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							


(1/3)

Construction

Pump name

OY 4N15-16/7,56

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-07-02 22:34:28	E-mail

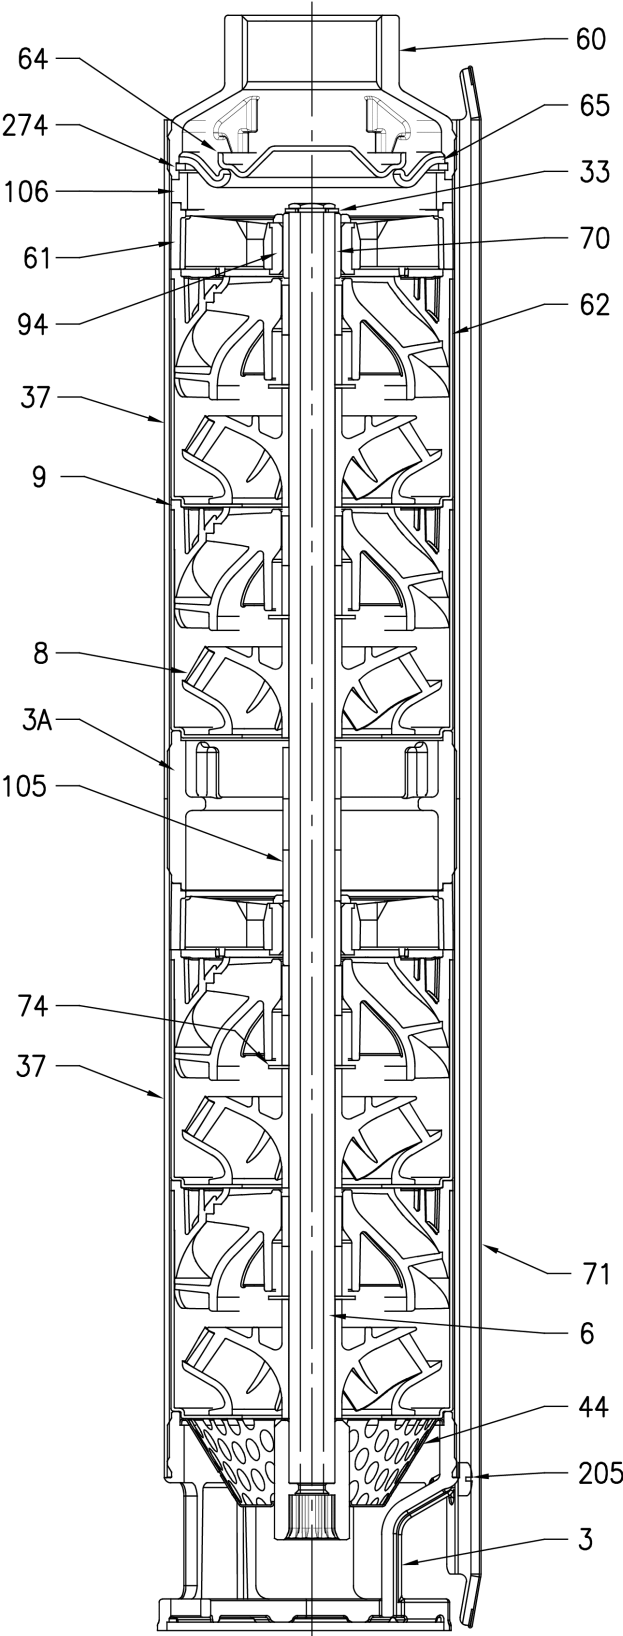

(2/3)

Construction

Pump name OY 4N15-16/7,56

Customer	Date 2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project ID Project redenumit 2024-07-02 22:34:28	E-mail

N°	PART NAME	MATERIAL	Q.TY
3	Bracket	EN 1.4308 (ASTM CF8)	1
3A	Join ring	EN 1.4308 (ASTM CF8)	[*]
6	Pump shaft with coupling	EN 1.4301 (AISI 304)	1
8	Impeller	Glass fibre reinforced PC	[*]
9	Diffuser	PPE+PS Glass fibre reinforced	[*]
33	Elastic Ring	EN 1.4301 (AISI 304)	1
37	Outer casing	EN 1.4301 (AISI 304)	[*]
44	Strainer	EN 1.4301 (AISI 304)	1
60	Discharge casing	EN 1.4308 (ASTM CF8)	1
61	Upper / Intermediate bracket	PPE+PS Glass fibre reinforced	[*]
62	Stage housing	EN 1.4301 (AISI 304)	[*]
64	Valve	EN 1.4301 (AISI 304)	1
65	Valve seat	EN 1.4301 (AISI 304) + EPDM Rubber	1
70	Shaft sleeve bearing	Alumina (Ceramic)	[*]
71	Cable guard	EN 1.4301 (AISI 304)	1
74	Thrust washer	EN 1.4301 (AISI 304)	[*]
94	Bearing	EPDM Rubber	[*]
105	Spacer	PPE+PS Glass fibre reinforced	[*]
106	Spacer	NORYL+GF20%	1
205	Screw (M4 x 6 UNI 7687)	EN 1.4301 (AISI 304)	2
274	Elastic Ring	EN 1.4310 (AISI 302)	1

[*] See **CONSTRUCTION 3**

(3/3)

Construction

Pump name

OY 4N15-16/7,56

Customer	Date2024-07-02	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-07-02 22:34:28	E-mail

Pump type	POS. 3A Join Ring	POS. 8 Impeller	POS. 9 Diffuser	POS. 37 Outer casing	POS. 61 Upper / Intermediate bracket	POS. 62 Stage housing	POS. 70 Shaft sleeve bearing	POS. 73 Thurst washer first impeller	POS. 74 Thurst washer	POS. 94 Bearing	POS. 105 Spacer
4N15 3	-	3	3	1	1	3	1	-	3	1	6
4N15 4	-	4	4	1	1	4	1	-	4	1	8
4N15 6	-	6	6	1	1	6	1	-	6	1	12
4N15 8	-	8	8	1	1	8	1	-	8	1	16
4N15 11	-	11	11	1	1	11	1	-	11	1	22