

Technical data

Pump name (*See Product description)EVM32 4-3F5/7

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-13 20:42:	E-mail

Requested data

1	Pump type	VERTICAL PUMPS	Fluid	Water
2	Number of pumps / Reserve	1 / 0	Liquid temperature °C	20
3	Flow m³/h		Kin. viscosity mm²/s	1.005
4	Head m		Vapour pressure bar	0.0234
5	Geodetic head m		PH value	
6	Inlet pressure (pin) bar	0	Density kg/m³	998.3
7	Available system NPSH		Solids Weight %	0
8	Ambient temperature °C	20		

Pump

9	Pump name	(*See Product description)EVM32 4-3F5/7.5	Frequency Hz	50
10	Design	VERTICAL PUMPS	Installation type	STANDARD
11	Manufacturer	EBARA	Impeller Diameter	Max. mm
12	Speed rpm	2900		Designed mm
13	No. of Stage	4		Min. mm
14	Connection Suction side		Flow	Operating m³/h
15	Connection Discharge side			Max- m³/h
16	Max Working Pressure bar	16		Min- m³/h
17	Shut-off head bar	8.20	Head	Operating m
18	Total weight kg	See the table of "Dimensions".		- (Qmax.) m
19	Shaft power kW			- (Qmin.) m
20			Max. Shaft Power at max. impeller kW	6.25
21	Required pump NPSH m		Efficiency %	

Materials

22	Impeller	AISI 304		
23	Intermediate casing	AISI 304		
24	Bottom casing	ASTMCF8		
25	Shaft	AISI 316		
26				
27				

Motor

28	Manufacturer	ETM	Insulation class	F
29	Type	TEFC_EVM32 4-3F5/7.5_400_Three Phase	Phases	3~
30	Specific design	IE3 / 50 Hz / Pole pairs 1	Frame size	132
31	Rated power kW	7.5	Weight kg	46
32	Number of poles	2	Electric voltage V	400
33	Speed rpm	2910	Electric current A	13.6
34	Degree of protection	IP 55		
35				

Remarks

Performance curve

Pump name (*See Product description)EVM32 4-3F5/7.5

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-13 20:42:	E-mail

Requested data


1	Flow	m³/h	
2	Head	m	
3	Geodetic head	m	

Pump

Operating flow	m³/h		Impeller Diameter Designed	mm	
Operating head	m		Frequency	Hz	50
			Speed	rpm	2900

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1mm²/s

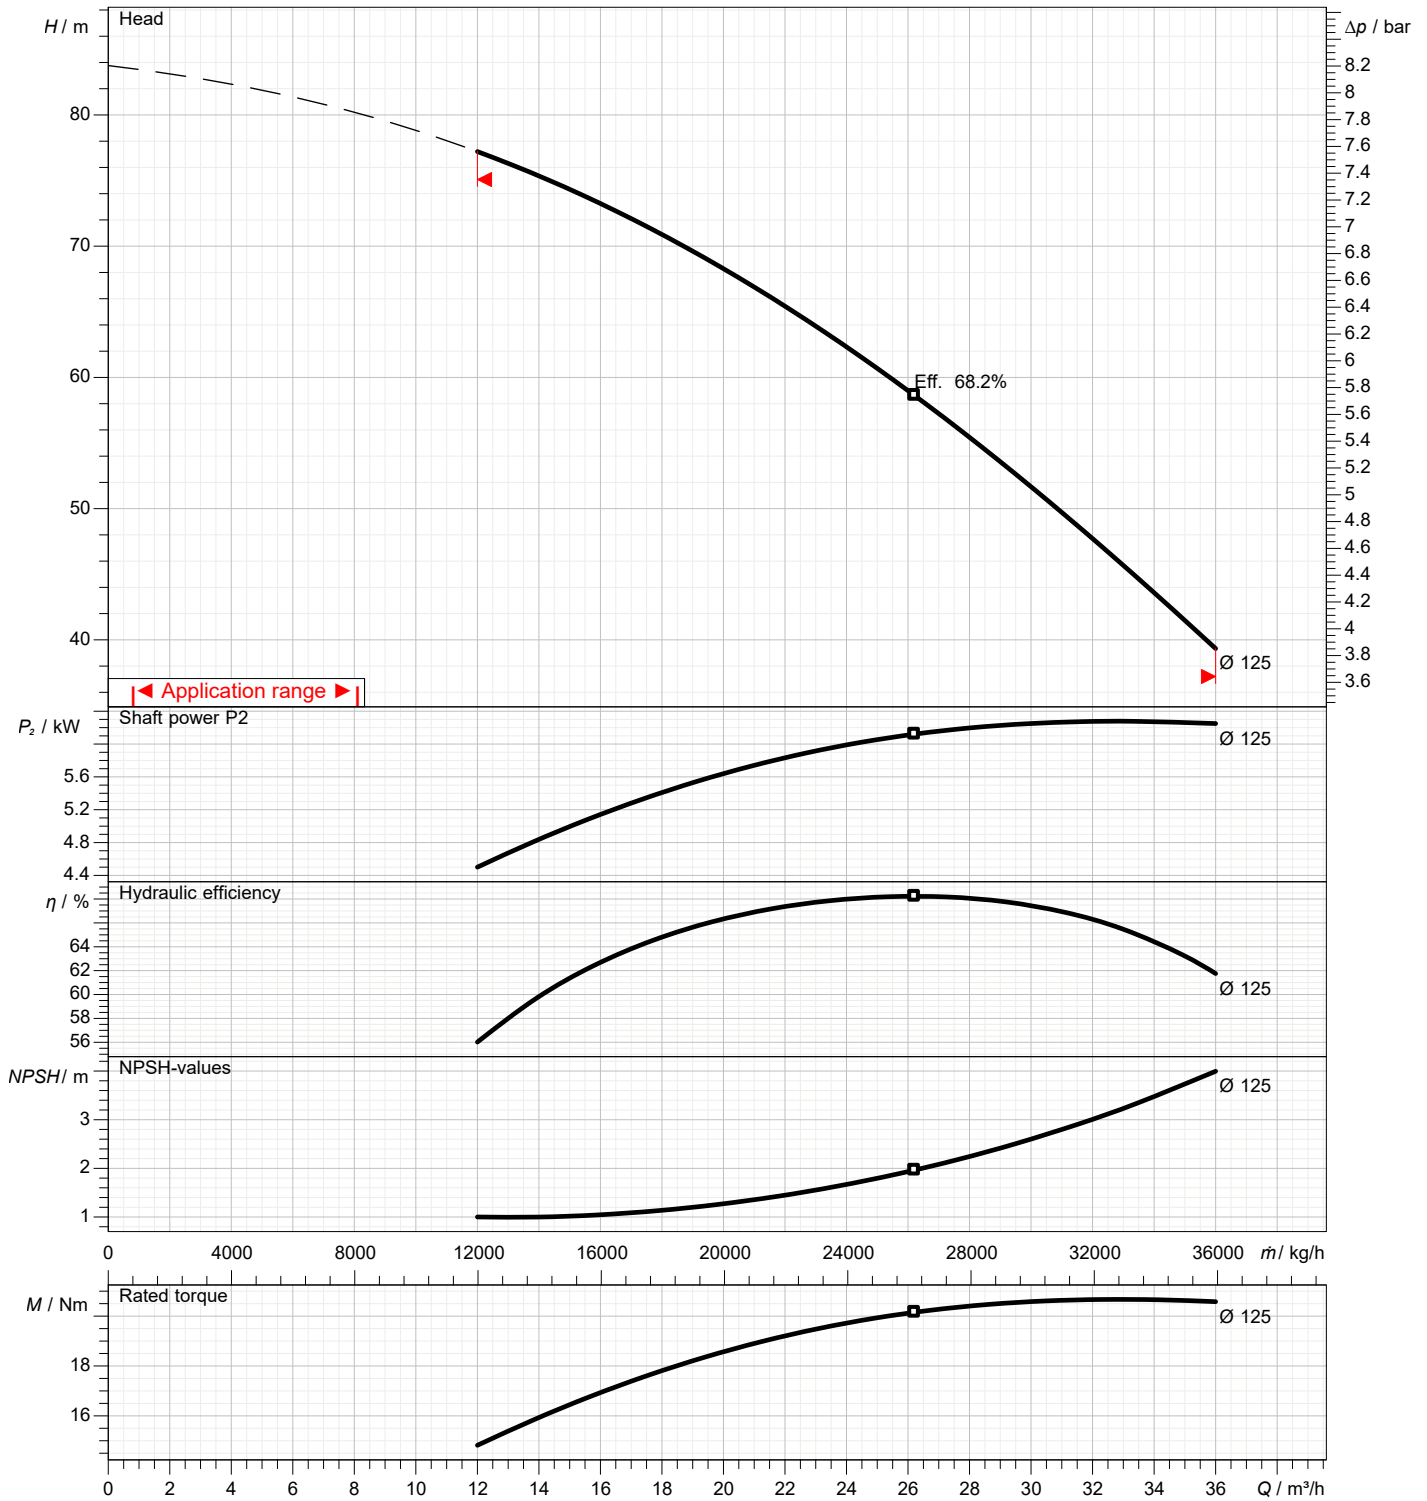

Dimensions

Pump name (*See Product description)EVM32 4-3F5/7.5

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-13 20:42:34	E-mail

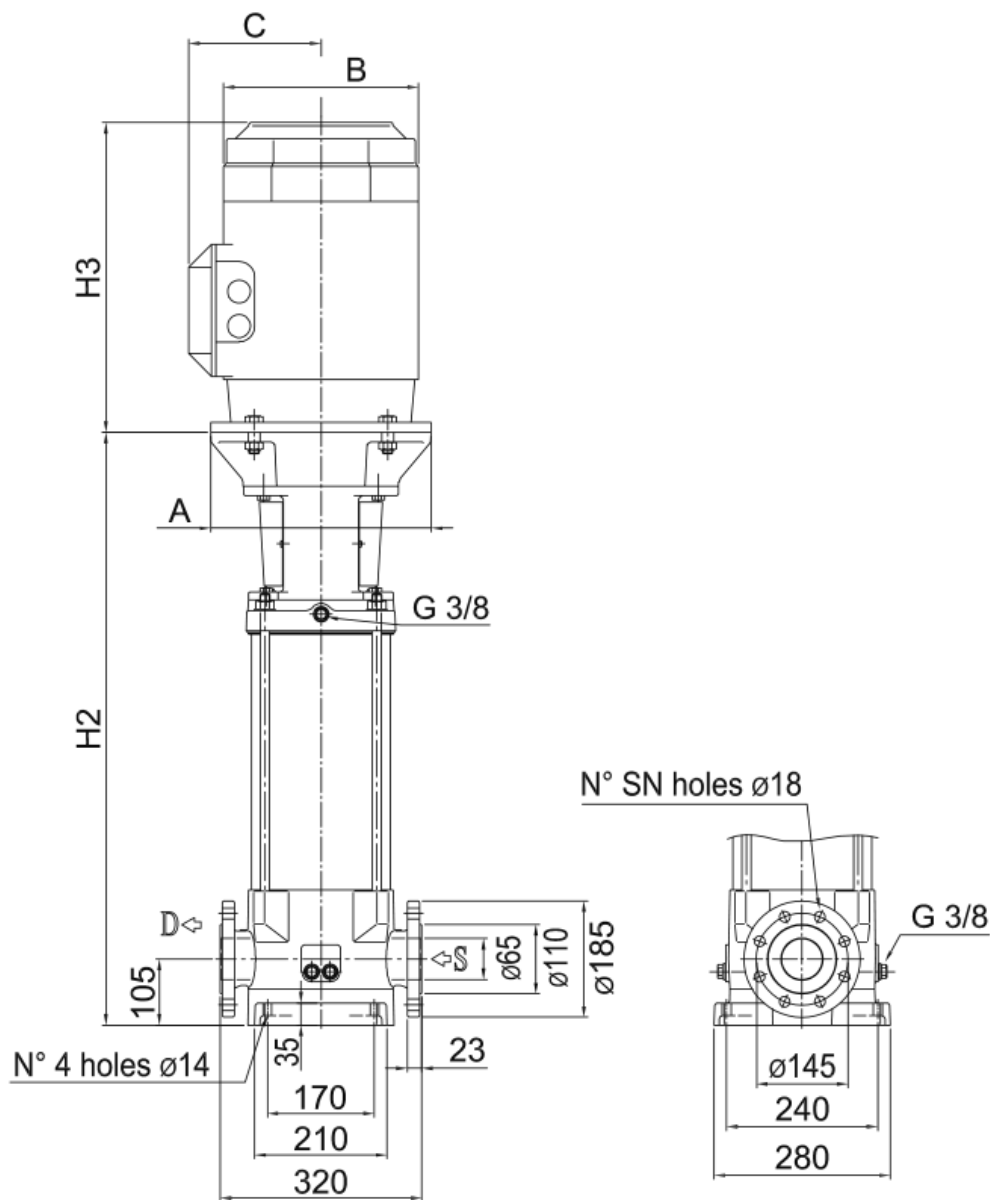


Dimensions in mm								
1	A	300						
2	B	220						
3	C	152						
4	H2	620						
5	H3	419						
6	SN	4 (Num)						
7	Weight P&M	122 kg						
8								
9								
10								
11								
12								
13								
14								
15								

(1/4)
Construction

Pump name (*See Product description)EVM32 4-3F5/7.5

Customer	Date2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenumit 2024-06-13 20:42:34	E-mail

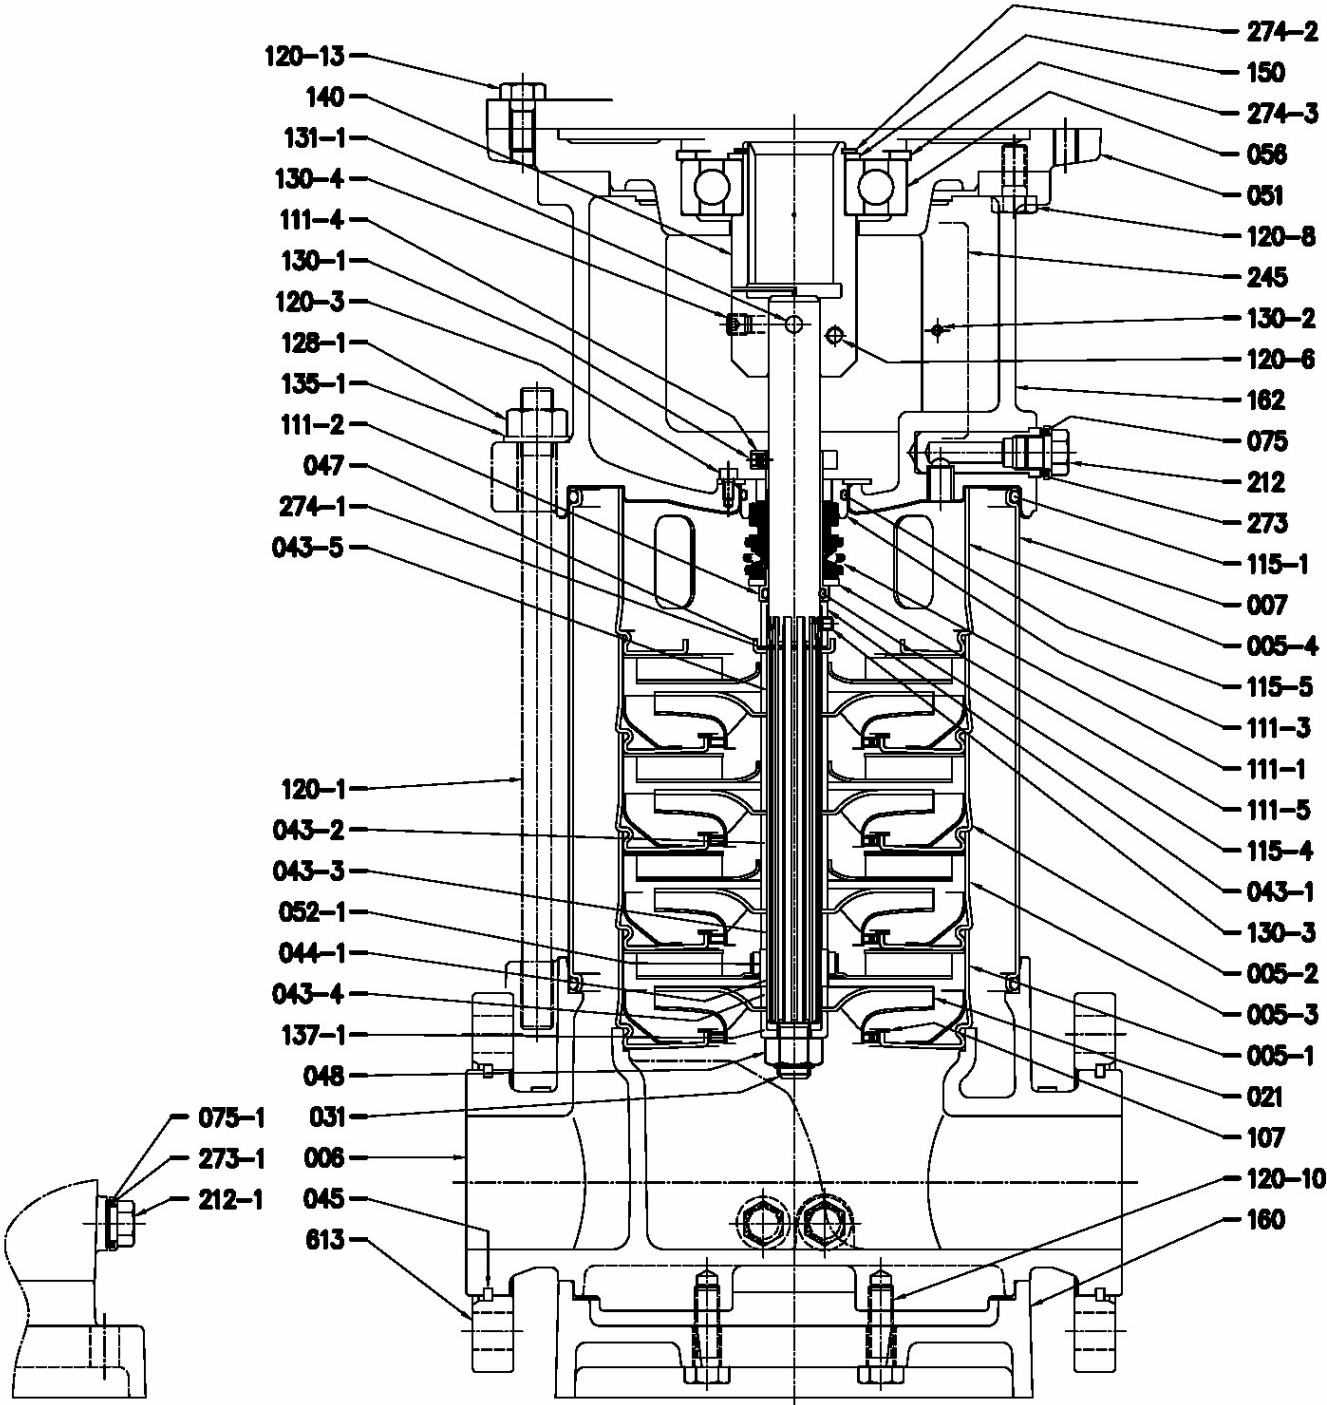

(2/4)

Construction

Pump name (*See Product description)EVM32 4-3F5/7.5

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Proiect redenumit 2024-06-13 20:42:34	E-mail

N°	PART NAME		MATERIAL		DIMENSIONS	STANDARD	Q.TY
			EVM	EVML			
005-1	Suction casing		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
005-2	Intermediate Casing		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
005-3	Intermediate casing bearing		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
005-4	Discharge casing		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
006	Bottom casing		EN 1.4308 (ASTM CF8)	EN 1.4408 (ASTM CF8M)			1
007	Outer casing		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
021	Impeller		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
031	Shaft		EN 1.4401 (AISI 316)				1
043-1	Shaft sleeve (mechanical seal)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
043-2	Shaft sleeve (intermediate)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
043-3	Shaft sleeve (bearing)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
043-4	Shaft sleeve (adjustment)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
043-5	Shaft sleeve (last stage)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
044-1	Shaft sleeve bearing		Tungsten carbide				[1]
045	Flange holder		EN 1.402 (AISI 420)				4
047	Ring Holder		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
048	Impeller nut		A2-70 UNI 7323 with inox insert	A4-70 UNI 7323 with inox insert	M16		1
051	Motor adapter		Cast iron EN-GJL-200-EN 1561				[1]
052-1	Bearing		Tungsten carbide				[1]
056	Ball bearing						[1]
075	O-Ring (plug)		EPDM	FPM			1
075-1	O-Ring (plug)		EPDM	FPM			4
107	Liner ring		PTFE / EN 1.4301 (AISI 304)	PTFE / EN 1.4401 (AISI 316)			[1]
111-1	Mechanical seal		Silicon carbide / Carbon / FPM				1
111-2	Mechanical seal cartridge		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
111-3	Mechanical seal seat		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
111-4	Seal holder		Brass OT 58 UNI 5705	EN 1.4401 (AISI 316)			1
111-5	Adjusting ring		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			[1]
115-1	O-Ring (outer casing)		EPDM	FPM	D.208.91x5.34		2
115-4	O-Ring (cartridge sleeve)		EPDM	FPM	D. 24.99x3,59		1
115-5	O-Ring (seal cover)		EPDM	FPM	D.44,04x3,53		1
120-1	Tie-rod		Zincate steel 6.8 strenght class ISO 898/1				4
120-3	Screw		A2-70 UNI 7323		M5xX10	UNI 5931	4
120-6	Screw for coupling	EVM32 1	Zincate steel 8.8 strenght class ISO 898/1		M6x16	UNI 5931	2
		EVM32 2 to 4-3			M8x20	UNI 5931	
		EVM32 5 to 14			M12x30	UNI 5931	
120-8	Screw	EVM32 3 to 4	Zincate steel 8.8 strenght class ISO 898/1		M12x25	UNI 5739	[1]
		EVM32 5 to 14			M10x30	UNI 5739	
120-10	Screw		Zincate steel 8.8 strenght class ISO 898/1		M12x40	UNI 5739	4
120-13	Screw for motor	EVM32 1 to 2	Zincate steel 8.8 strenght class ISO 898/1		M8x20	UNI 5739	4
		EVM32 3 to 4			M12x30	UNI 5739	
		EVM32 5 to 14			M16x65	UNI 5739	
128-1	Nut for tie rod		Zincate steel		M16	UNI 5588	4
130-1	Set screw		A2-70 UNI 7323		M6x8	UNI 5923	3
130-2	Screw for coupling guard		A2-70 UNI 7323		M5x6	UNI 7687	4
130-3	Set screw		A2-70 UNI 7323		M6x6	UNI 5923	1
130-4	Set screw		Carbon steel		M10x10	UNI 5923	1
131-1	Pin for shaft		Carbon Steel				1
135-1	Washer		Zincate steel		17x30x3	UNI 6592	4
137-1	Impeller spacer		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
140	Coupling		Brass OT 58 UNI 5705				[1]
150	Spacer		carbon steel				[1]
160	Base		Cast iron EN-GJL-200-EN 1561				1
162	Motor bracket		Cast iron EN-GJL-200-EN 1561				1
212	Plug		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
212-1	Plug		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			4
245	Coupling guard		EN 1.4301 (AISI 304)				2
273	Plug Washer		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			1
273-1	Plug Washer		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)			4
274-1	C-type snap ring (mechanical seal)		EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)	D.26	UNI 7435	1
274-2	C-type snap ring (coupling)	EVM32 3 to 4	Carbon Steel TC 80		D.50	UNI 7435	[1]
		EVM32 5 to 10			D.65	UNI 7435	
		EVM32 11 to 12			D.75	UNI 7535	
274-3	C-type snap ring (bracket)		Carbon Steel TC 80		D.110	UNI 7437	[1]
613	Flange		Carbon steel				2

[1] See table on CONSTRUCTION 3

(3/4)

Construction

Pump name

(*See Product description)EVM32 4-3F5/7.5

Customer	Date	2024-06-13	Company
Contact	Item no.		Issued by
Phone	Project		Phone
E-mail	Project ID	Project redenumit 2024-06-13 20:42:34	E-mail

Pump Type EVM()	Quantity for model																															
	005-2	005-3	011	021	021-1	039-1	043-2	043-3	043-4	044-1	051	052-1	056	070-1	107	111-5	120-4	120-5	120-7	120-8	128-3	129	135-3	135-4	136	140	140-1	140-2	150	274-2	274-3	
32 3-3F5/5.5	1	1	/	/	3	/	1	1	1	1	1	1	1	/	3	1	/	/	/	4	/	/	/	/	/	/	1	/	/	1	1	1
32 3-1F5/5.5	1	1	/	2	1	/	1	1	1	1	1	1	1	/	3	1	/	/	/	4	/	/	/	/	/	1	/	/	1	1	1	
32 4-3F5/7.5	2	1	/	1	3	/	2	1	1	1	1	1	1	/	4	1	/	/	/	4	/	/	/	/	/	1	/	/	1	1	1	
32 4-1F5/7.5	2	1	/	3	1	/	2	1	1	1	1	1	1	/	4	1	/	/	/	4	/	/	/	/	/	1	/	/	1	1	1	
32 5-3F5/11	3	1	1	2	3	1	3	1	1	1	1	1	1	1	5	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 5-0F5/11	3	1	1	5	/	1	3	1	1	1	1	1	1	1	5	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 6-3F5/11	4	1	1	3	3	1	4	1	1	1	1	1	1	1	6	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 6-2F5/11	4	1	1	4	2	1	4	1	1	1	1	1	1	1	6	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 7-3F5/15	5	1	1	4	3	1	5	1	1	1	1	1	1	1	7	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 7-0F5/15	5	1	1	7	/	1	5	1	1	1	1	1	1	1	7	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 8-3F5/15	6	1	1	5	3	1	6	1	1	1	1	1	1	1	8	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 8-1F5/15	6	1	1	7	1	1	6	1	1	1	1	1	1	1	8	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 9-3F5/18.5	7	1	1	6	3	1	7	1	1	1	1	1	1	1	9	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 9-0F5/18.5	7	1	1	9	/	1	7	1	1	1	1	1	1	1	9	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 10-3F5/18.5	7	2	1	7	3	1	7	2	2	2	1	2	1	1	10	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 10-2F5/18.5	7	2	1	8	2	1	7	2	2	2	1	2	1	1	10	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 11-3F5/22	8	2	1	8	3	1	8	2	2	2	1	2	1	1	11	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 11-0F5/22	8	2	1	11	/	1	8	2	2	2	1	2	1	1	11	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	
32 12-3F5/22	9	2	1	9	3	1	9	2	2	2	1	2	1	1	12	1	4	4	3	4	4	/	4	3	/	/	1	1	1	1	/	


(4/4)

Construction

Pump name

(*See Product description)EVM32 4-3F5/7.5

Customer	Date2024-06-13	Company
Contact	Item no.	Issued by
Phone	Project	Phone
E-mail	Project IDProject redenunit 2024-06-13 20:42:34	E-mail

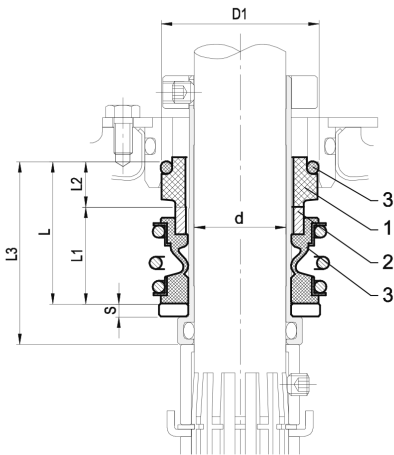

Size [mm]	Max operating pressure [bar]	d [mm]	D1 [mm]	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]	S [mm]	Material		
									1 Stationary Seal Ring	2 Rotary Seal Ring	3 Rubber
25	25	25	43	39	26.5	12.5	50	3.5	Carbon graphite	Silicon carbide	FPM