

**Tender text**

**Project name**  
**Project ID**

**Customer**  
 Contact  
 E-mail  
 Phone

**Company**  
 Contact  
 E-mail  
 Phone

2025-01-20

Page 1 / 3

Pos.no	Description	Item no.
	<b>Submersible dirty water motor pumps</b>	
	AmaDrainer C 411 ND / 35	29128689
	<b>AmaDrainer C 411 D / 35</b>	

Vertical single-stage fully floodable submersible motor pump in close-coupled design, IP68, without level control, max. immersion depth: 7 m.

- Connection socket or discharge elbow with internal thread
- 10-metre power cable
- Without float switch

**Operating data**

Fluid handled : Water  
 Flow rate Q :  
 Head H :  
 Permissible fluid temperature : 40 °C max. in continuous duty

**Drive**

Supply voltage : 3~ 400 / 50 Hz  
 Frequency : 50 Hz  
 Nominal power P1 : 1,541 kW  
 Motor rating P2 : 1,1 kW  
 Nominal current : 2,50 A  
 Enclosure : IP68  
 Motor winding to : IEC 60038  
 Motor design to : EN 60043 T1/IEC 34-1  
 Thermal class : F  
 Starting method : DOL

Pump controlled via an external float switch, available as an accessory, and a switchgear / control unit

**Materials**

Pump casing : Chromnickelstahl (1.4301)  
 Suction cover : Chromnickelstahl (1.4301)  
 Impeller : Polyamide (PA)  
 Pump foot : Polypropylen (PP)



## Tender text

**Project name**

**Project ID**

**Customer**

Contact

E-mail

Phone

**Company**

Contact

E-mail

Phone

2025-01-20

Page 2 / 3

---

<b>Pos.no</b>	<b>Description</b>	<b>Item no.</b>	<b>Qty.</b>	<b>UP / EUR</b>	<b>TP / EUR</b>
	Rotor shaft	: Chrome steel (1.4021)			
	<b>Dimensions</b>				
	Free passage	: 35 mm			
	Discharge side	: DN 40			
	Length	: 300 mm			
	Width	: 440 mm			
	Height	: 280 mm			
	<b>Purchase order information</b>				
	Make	: KSB			
	Type series, size	: Ama-Drainer C 411 D / 35			
	Material price group	: 32			
	Weight	: 16,5 kg			
	<b>Material number</b>	: 29128689			

---

**Data sheet: technical data**

**Project name**  
**Project ID**


**Item-No.**  
**Design** Submersible dirty water motor pumps  
**Type / Coding** AmaDrainer C 411 ND / 35

**Customer**  
Contact  
E-mail  
Phone

**Company**  
Contact  
E-mail  
Phone

2025-01-20

Page 3 / 3

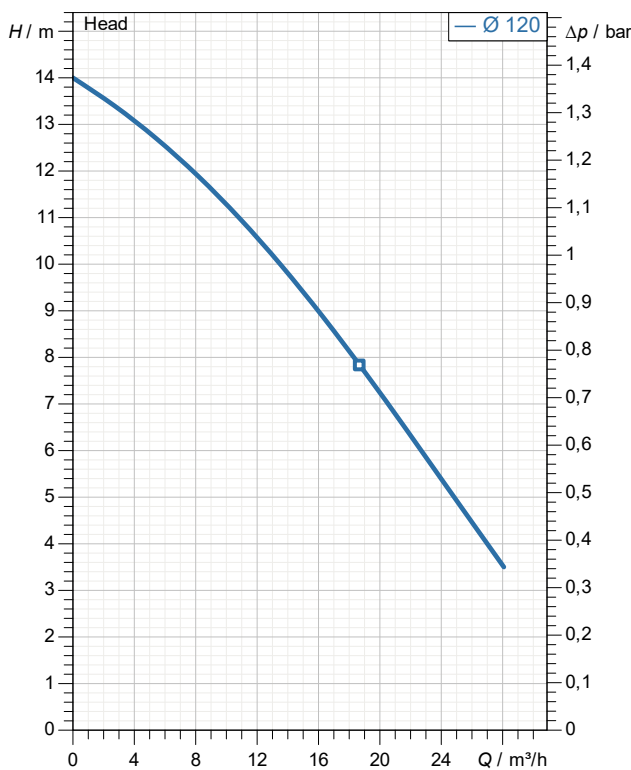

**demand data**

Flow  
Total head  
Geodetic head  
Media Water  
Liquid temperature 20 °C

**Pump data**

Make KSB  
Type AmaDrainer C 411 ND / 35  
Design Submersible dirty water motor p  
Specific design Single head pump  
No. of pumps 1  
Standby pump No  
Max. fluid temperature 40 °C

**Hydraulic data (Duty point)**

Flow  
Head

**Material / sealing element**

Pump casing Stainless steel 1.4401  
Shaft CrNiMo steel 1.4571  
Impeller  
O-ring  
Float switch

**Dimensions**

Discharge flange standard DN 40

**Rated motor data**

Power input (P1) 1,54 kW  
Rated power (Pn) 1,1 kW  
Speed 2.800 1/min  
Rated voltage 400 V  
Rated current (In) 2,5 A

**Product information**

Ident. No./ type key 29128689  
Weight loaded 16,5 kg  
Gross price 3.621,30 EUR  
PL 2025-01-20  
Price group 32