

**Tender text**

**Project name**  
**Project ID**

**Customer**  
Contact  
E-mail  
Phone

**Company**  
Contact  
E-mail  
Phone

2025-01-20

Page 1 / 3

<b>Pos.no</b>	<b>Description</b>	<b>Item no.</b>
	<b>Submersible dirty water motor pumps</b>	
	AmaDrainer C 411 SD / 35	29128690
	<b>Ama-Drainer C 411 D / 35</b>	
	Vertical single-stage fully floodable submersible motor pump in close-coupled design, IP68, with level control, max. immersion depth: 7m.	
	<ul style="list-style-type: none"> <li>- Connection socket or discharge elbow with internal thread</li> <li>- 10-metre power cable</li> <li>- With float switch</li> </ul>	
	<b>Operating data</b>	
	Fluid handled	: Water
	Flow rate Q	:
	Head H	:
	Permissible fluid temperature	: max.40°C in continuous duty
	<b>Drive</b>	
	Supply voltage	: 3~ 400 / 50 Hz
	Frequency	: 50 Hz
	Nominal power P1	: 1,541 kW
	Motor rating P2	: 1,1 kW
	Nominal current	: 2,50 A
	Enclosure	: IP68
	Motor winding to	: IEC 60038
	Motor design to	: EN 60043 T1/IEC 34-1
	Thermal class	: F
	Starting method	: DOL
	Pump controlled via integrated float switch	
	<b>Materials</b>	
	Pump casing	: Chrome nickel steel (1.4301)
	Suction cover	: Chrome nickel steel (1.4301)
	Impeller	: Polyamide (PA)
	Pump foot	: Polypropylene (PP)
	Rotor shaft	: Chrome steel (1.4021)



### Tender text

**Project name**

**Project ID**

**Customer**

Contact

E-mail

Phone

**Company**

Contact

E-mail

Phone

2025-01-20

Page 2 / 3

---

Pos.no	Description	Item no.	Qty.	UP / EUR	TP / EUR
	<b>Dimensions</b>				
	Free passage	: 35 mm			
	Discharge side	: DN 40			
	Length	: 300 mm			
	Width	: 440 mm			
	Height	: 280 mm			
	<b>Purchase order information</b>				
	Manufacturer	: KSB			
	Type series / size	: Ama-Drainer C 411 D / 35			
	Material price group	: 32			
	Weight	: 18,3 kg			
	<b>Item number</b>	: 29128690			

---

**Data sheet: technical data**

**Project name**  
**Project ID**


**Item-No.**  
**Design**                   **Submersible dirty water motor pumps**  
**Type / Coding**           **AmaDrainer C 411 SD / 35**

**Customer**  
Contact  
E-mail  
Phone

**Company**  
Contact  
E-mail  
Phone

2025-01-20

Page 3 / 3

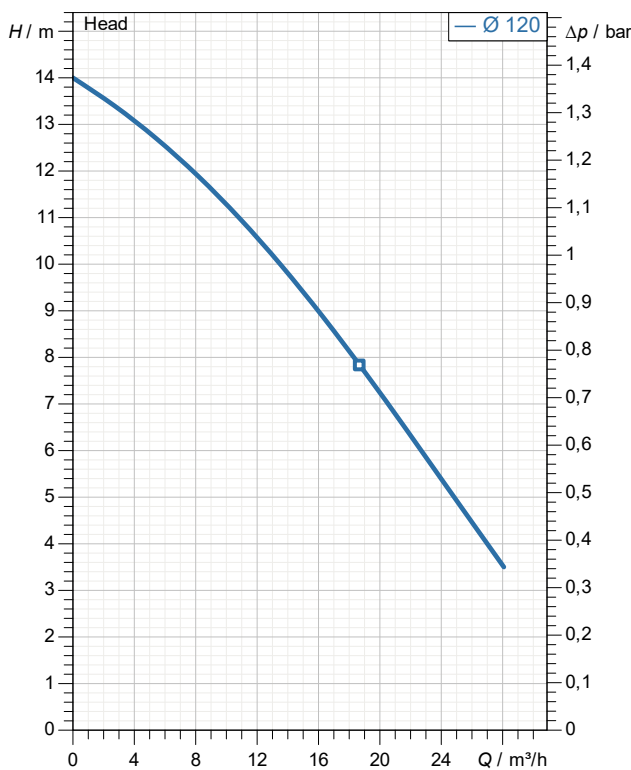

**demand data**

Flow  
Total head  
Geodetic head  
Media                           Water  
Liquid temperature       20 °C

**Pump data**

Make                           KSB  
Type                           AmaDrainer C 411 SD / 35  
Design                       Submersible dirty water motor p  
Specific design           Single head pump  
No. of pumps               1  
Standby pump               No  
Max. fluid temperature   40 °C

**Hydraulic data (Duty point)**

Flow  
Head

**Material / sealing element**

Pump casing               Stainless steel 1.4401  
Shaft                        CrNiMo steel 1.4571  
Impeller  
O-ring  
Float switch

**Dimensions**

Discharge flange standard   DN 40

**Rated motor data**

Power input (P1)           1,54 kW  
Rated power (Pn)          1,1 kW  
Speed                        2.800 1/min  
Rated voltage               400 V  
Rated current (In)         2,5 A

**Product information**

Ident. No./ type key       29128690  
Weight loaded              18,3 kg  
Gross price                 3.723,19 EUR  
PL 2025-01-20  
Price group                 32