

Tender text

Project name
Project ID

Customer
 Contact
 E-mail
 Phone

Company
 Contact
 E-mail
 Phone

2025-01-20

Page 1 / 3

Pos.no	Description	Item no.
	Submersible dirty water motor pumps	
	AmaDrainer R 515 SD / 10	29128763
	Ama-Drainer R 515 D / 10	
	Vertical single-stage fully floodable submersible motor pump in close-coupled design, IP68, with level control, max. immersion depth: 7m.	
	<ul style="list-style-type: none"> - Connection socket or discharge elbow with internal thread - 10-metre power cable - With float switch 	
	Operating data	
	Fluid handled	: Water
	Flow rate Q	:
	Head H	:
	Permissible fluid temperature	: max.40°C in continuous duty
	Drive	
	Supply voltage	: 3~ 400 / 50 Hz
	Frequency	: 50 Hz
	Nominal power P1	: 1,88 kW
	Motor rating P2	: 1,5 kW
	Nominal current	: 3,60 A
	Enclosure	: IP68
	Motor winding to	: IEC 60038
	Motor design to	: EN 60043 T1/IEC 34-1
	Thermal class	: F
	Starting method	: DOL
	Pump controlled via integrated float switch	
	Materials	
	Pump casing	: Chrome nickel steel (1.4301)
	Suction cover	: Chrome nickel steel (1.4301)
	Impeller	: Polyamide (PA)
	Pump foot	: Polypropylene (PP)
	Rotor shaft	: Chrome steel (1.4021)



Tender text

Project name

Project ID

Customer

Contact

E-mail

Phone

Company

Contact

E-mail

Phone

2025-01-20

Page 2 / 3

Pos.no	Description	Item no.	Qty.	UP / EUR	TP / EUR
	Dimensions				
	Free passage	: 10 mm			
	Discharge side	: DN 50			
	Length	: 300 mm			
	Width	: 280 mm			
	Height	: 440 mm			
	Purchase order information				
	Manufacturer	: KSB			
	Type series / size	: Ama-Drainer R 515 D / 10			
	Material price group	: 32			
	Weight	: 19,5 kg			
	Item number	: 29128763			

Data sheet: technical data

Project name
Project ID


Item-No.
Design **Submersible dirty water motor pumps**
Type / Coding **AmaDrainer R 515 SD / 10**

Customer
Contact
E-mail
Phone

Company
Contact
E-mail
Phone

2025-01-20

Page 3 / 3

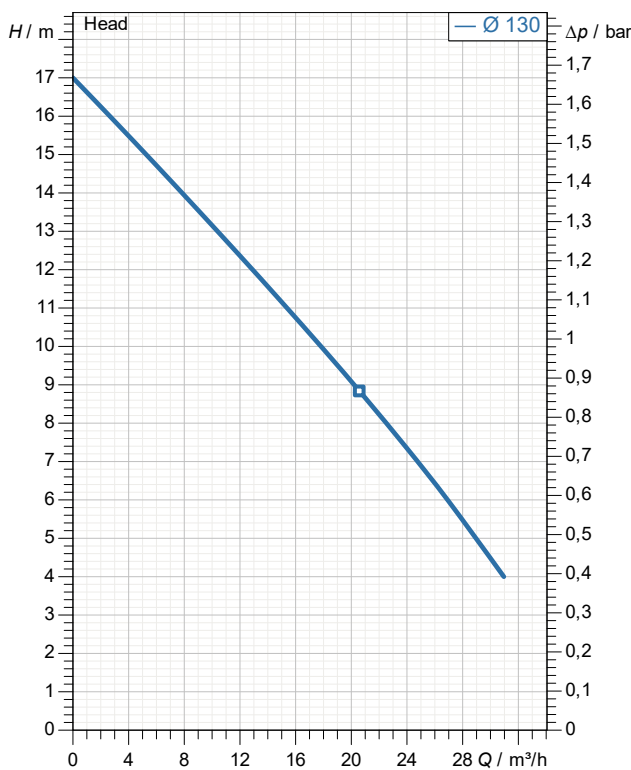

demand data

Flow
Total head
Geodetic head
Media Water
Liquid temperature 20 °C

Pump data

Make KSB
Type AmaDrainer R 515 SD / 10
Design Submersible dirty water motor p
Specific design Single head pump
No. of pumps 1
Standby pump No
Max. fluid temperature 40 °C

Hydraulic data (Duty point)

Flow
Head

Material / sealing element

Pump casing Stainless steel 1.4301
Shaft Chrome steel 1.4021+QT800
Impeller Polyamide (PA)
O-ring Fluorocarbon rubber FPM
Float switch POLYPROPYLENE (PP)

Dimensions

Discharge flange standard DN 50

Rated motor data

Power input (P1) 1,88 kW
Rated power (Pn) 1,5 kW
Speed 2.800 1/min
Rated voltage 400 V
Rated current (In) 3,6 A

Product information

Ident. No./ type key 29128763
Weight loaded 19,5 kg
Gross price 5.915,21 EUR
PL 2025-01-20
Price group 32