

Tender text

Project name
Project ID

Customer
 Contact
 E-mail
 Phone

Company
 Contact
 E-mail
 Phone

2025-01-20

Page 1 / 3

Pos.no	Description	Item no.
	Submersible dirty water motor pumps	
	Amarex NS 032-160/002 YLG-160	39100380

Amarex NS with explosion protection

KSB Amarex NS submersible motor pump for waste water applications, made of grey cast iron, in vertical, close-coupled, floodable design for wet installation, single-stage, with three-phase motor to VDE Standards, protected against overheating by two independent monitoring circuits, power cable, with absolutely water-tight cable entry.

Pump set : Without installation kit
 Impeller type : S
 Cutter : Yes

Operating data

Fluid handled : Water
 Flow rate :
 Head :
 Operating temperature : 20 °C

Drive

Nominal voltage : 3~400 V
 Nominal frequency: 50 Hz
 Starting method : DOL
 Enclosure : IP68 to EN 60529 / IEC 529
 Explosion protection : Ex d IIB T4 Gb
 Max. fluid temperature : 40 °C

Thermal motor protection : Bimetal
 Nominal power P1 : 2,67 kW:
 Nominal power P2 : 1,5 kW
 Nominal current : 3,37 A
 Speed : 2.850 1/min
 Cable length : 10 m

Materials

Pump casing : EN-GJL-250
 Intermediate casing : EN-GJL-250
 Impeller : EN-GJL-250



Tender text

Project name
Project ID

Customer
Contact
E-mail
Phone

Company
Contact
E-mail
Phone

2025-01-20

Page 2 / 3

Pos.no	Description	Item no.	Qty.	UP / EUR	TP / EUR
	Pump shaft / motor shaft	: 1.4021+QT800			
	Cutter	: 1.2080+A (K100)			
	Sealing elements	: Nitrile butadiene rubber (NBR)			
	Coating	: Two-component epoxy resin, RAL 5002			
	Shaft seal	: Double mechanical seal (bi-directional)			
	Pump end	: SiC/SiC mechanical seal			
	Motor end	: Carbon/Al2O3 mechanical seal			
	Dimensions and connections				
	Impeller diameter	: 160 mm			
	Free passage	: 6 mm			
	Nominal diameter, discharge side	: PN 16			
	Suction nominal size	: DN 32			
	Purchase order information				
	Approx. net weight	: 29 kg			
	Make	: KSB			
	Type series	: Amarex N			
	Size	: 032-160S			
	Material price group	: 19			
	Material number:	: 39100380			

Data sheet: technical data

Project name
Project ID


Item-No.
Design **Submersible dirty water motor pumps**
Type / Coding **Amarex NS 032-160/002 YLG-160**

Customer
Contact
E-mail
Phone

Company
Contact
E-mail
Phone

2025-01-20

Page 3 / 3

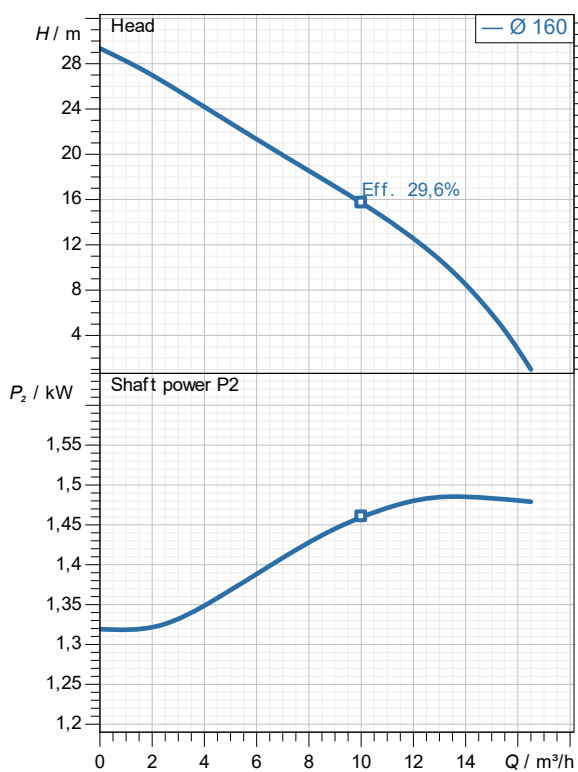

demand data

Flow
Total head
Geodetic head
Media Water
Liquid temperature 20 °C

Pump data

Make KSB
Type Amarex NS 032-160/002 YLG-160
Design Submersible dirty water motor p
Specific design Single head pump
No. of pumps 1
Standby pump No
Max. fluid temperature 40 °C

Hydraulic data (Duty point)

Flow
Head

Material / sealing element

Pump casing Grey cast iron JL1040
Shaft Chrome steel 1.4021+QT800
Impeller Grey cast iron JL1040
Cutter 1.2842+A

Dimensions

Discharge flange standard DN 32

Rated motor data

Power input (P1) 2,67 kW
Rated power (Pn) 1,5 kW
Speed 2.850 1/min
Rated voltage 400 V
Rated current (In) 3,37 A

Product information

Ident. No./ type key 39100380
Weight loaded 29 kg
Gross price 2.418,72 EUR
PL 2025-01-20
Price group 19