

**Customer**


# Technical data

## Submersible sewage pump Rexa UNI-V06B/T015-540

Project ID                      Untitled project 2025-03-04 01:04:54.425

Project name  
Installation location  
Customer pos. No.

Date                      2025-03-04

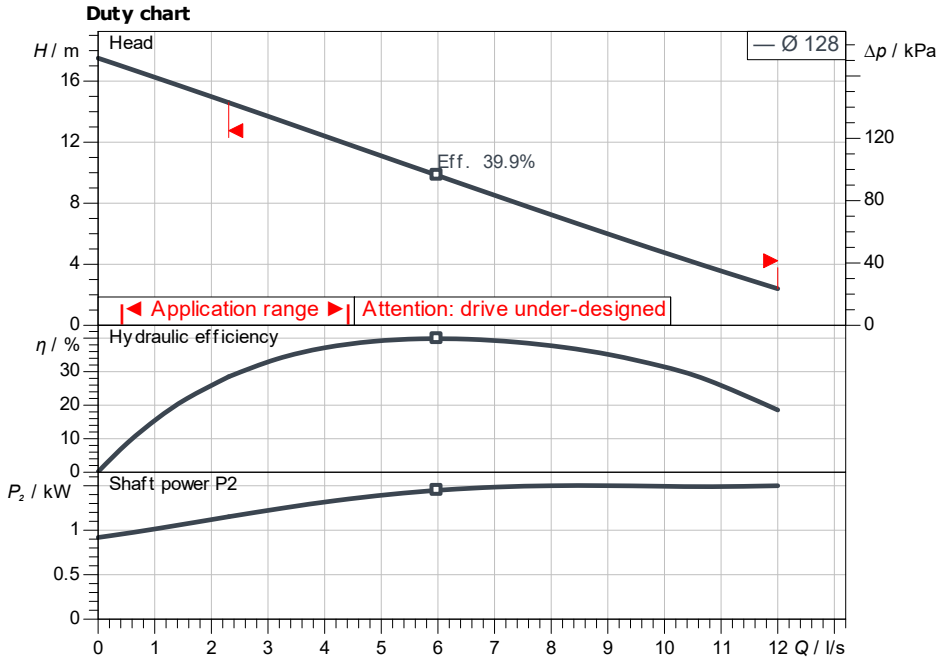

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow	
Head	
Power input P1	
Total efficiency	

**Product data**

Submersible sewage pump  
Rexa UNI-V06B/T015-540

Max. operating pressure	190 kPa
Fluid temperature	3 °C ... +40 °C
Maximum submergence depth	7 m
Free ball passage	44 mm
Impeller type	Vortex impeller
Float switch	No

**Motordata per Motor/Pump**

Type of motor	Submersible motor – su
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Nominal speed	2,808 1/min
Rated power P2	1.50 kW
Power input P1	2.1 kW
Rated current	4.35 A
Activation type	Direct On Line (DOL)
Degree of protection	IP68
Explosion protection type	-
Motor protection	Bimetall
Insulation class	F
Operating mode (immersed)	S1
Operating mode (non-immersed)	S2-15 min, S3-10%

**Cable**

Length of connecting cable	10 m
Cable type	H07RN-F
Cable cross section	6G1
Mains plug	No
Type of connection cable	Detachable

**Fitting dimensions**

Pipe connection on the suction side, -/PN 10	
Pipe connection (pressure side)	DN 65, -/PN 10

**Materials**

Pump housing	PP-GF30
Impeller	PP-GF30
Shaft	1.4401
Sealing on pump side	QQPGG
Sealing on motor side	NBR
Gasket material	NBR
Motor housing	1.4401

**Information for order placements**

Weight approx.	16 kg
Item number	6096656

