

**Customer**


## Technical data

### Submersible pump Sub TWU 4.08-10-DM-C

Project ID: Untitled project 2025-03-17 08:16:17.345

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-17

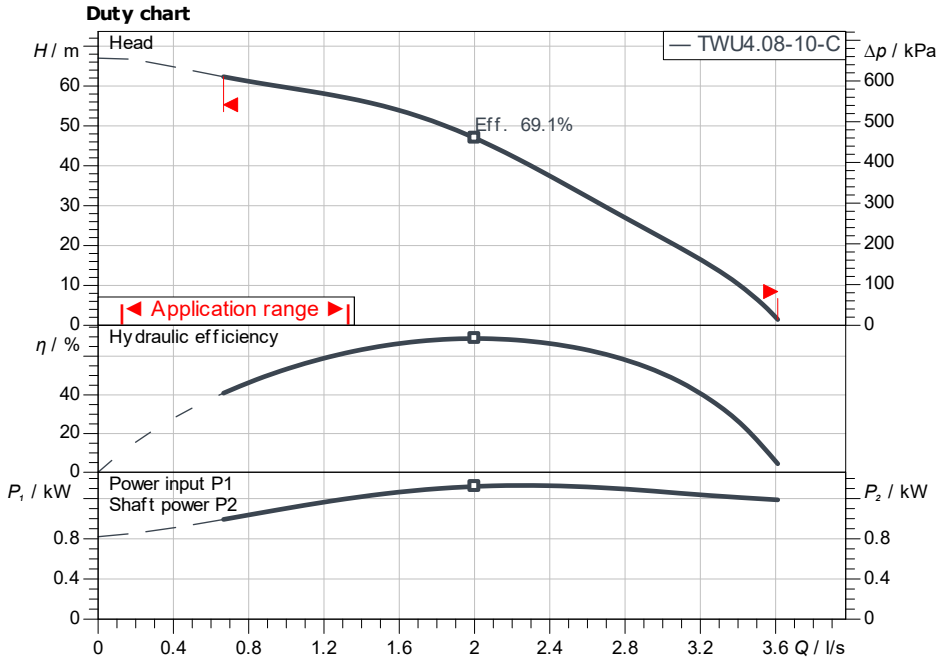

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
Power input P1	

**Product data**

Submersible pump	
Sub TWU 4.08-10-DM-C	
Max. operating pressure	737 kPa
Fluid temperature	3 °C ... +30 °C
Minimum efficiency index (MEI)	$\geq 0.4$
Max. pump diameter	98 mm

**Motordata per Motor/Pump**

Mains connection	3~400 V / 50 Hz
Type of motor	Submersible motor
Activation type	Direct On Line (DOL)
Min. flow at the motor	0.08 m/s
Motor diameter	97 mm
Permitted voltage tolerance	+5 %
Nominal speed	2,830 1/min
Rated power P2	1.50 kW
Rated current	3.90 A
Power factor	0.78
Degree of protection	IP68
Insulation class	B

**Cable**

Length of connecting cable	1.75 m
Cable type	4G1,5

**Fitting dimensions**

Discharge size	Rp 2
Flange standard	-


**Materials**

Pump housing	1.4301
Motor housing	1.4301
Shaft	1.4104
Impeller	PPE

**Information for order placements**

Weight approx.	16 kg
Item number	6081625

**Approval**

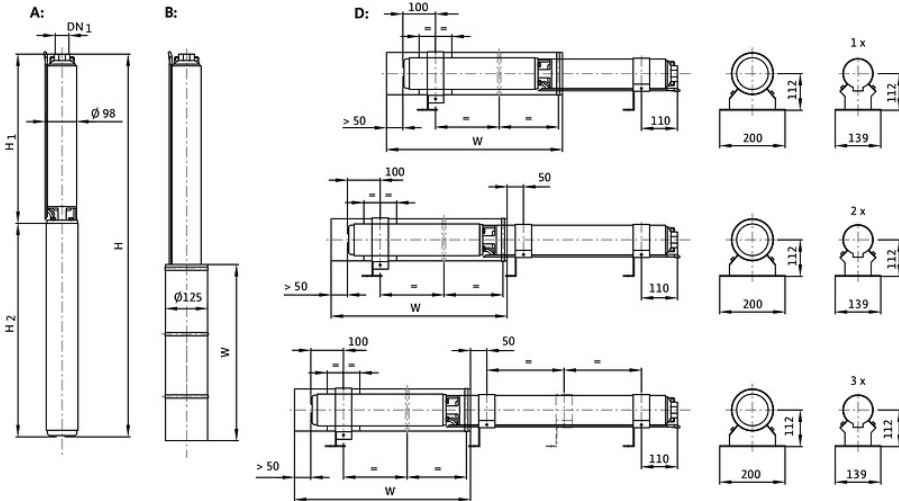

**Dimensions**

H	825	W	500
H1	485		
H2	340		
H2	340		