

Customer


Technical data

Self-priming multistage centrifugal pump Initial JET 3-4

Project ID Untitled project 2025-03-03 15:12:38.853

Project name
Installation location
Customer pos. No.

Date 2025-03-03

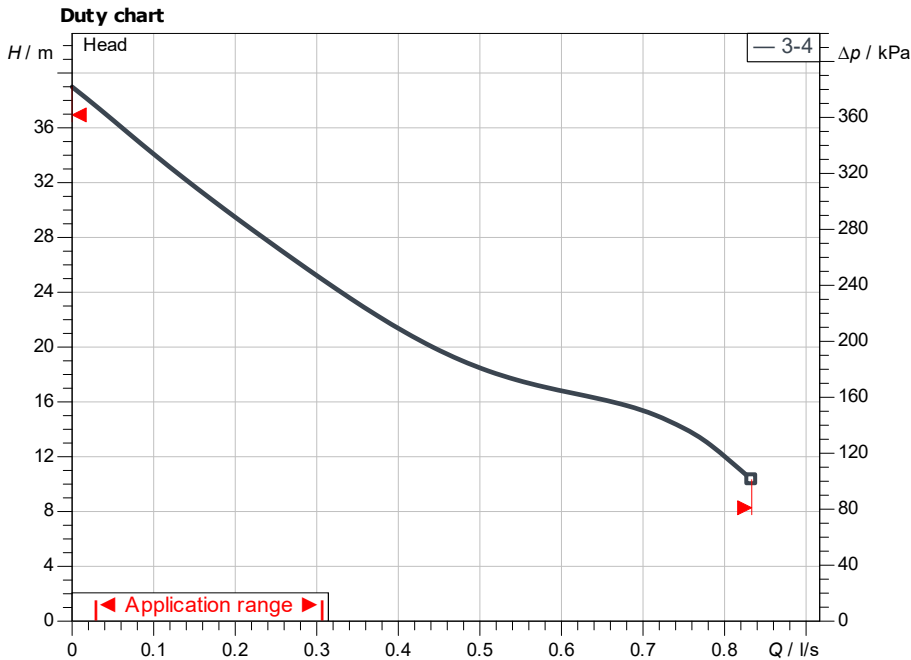

Requested data

Flow
Head
Media Water 100 %
Fluid temperature 20.00 °C
Density 998.30 kg/m³
Kin. viscosity 1.00 mm²/s

Hydraulic data (Duty point)

Flow
Head

Product data

Self-priming multistage centrifugal pump
Initial JET 3-4
Max. operating pressure 600 kPa
Inlet pressure max. 2 bar
Max. suction head
Fluid temperature 5 °C ... +35 °C
Max. ambient temperature 40 °C

Motor data per motor/pump

Mains connection 1 ~ 230 V / 50 Hz
Permitted voltage tolerance +-10 %
Max. speed 2,850 1/min
Rated power P2 0.60 kW
Rated current 3.80 A
Degree of protection IPX4
Insulation class F
Motor protection

Fitting dimensions

Pipe connection on the suction : G 1, PN 6
Pipe connection (pressure side) G 1, PN 6

Materials

Pump housing EN-GJL-200
Shaft 1.0301
Shaft seal BQ1PFF
Gasket material NBR
Impeller PPE/PS-GF20

Information for order placements

Weight approx. 9.4 kg
Item number 4185607

