

Technical data

Multi-pump system

SiBoost Smart 2 Helix V 1604

Project ID

Untitled project 2025-03-04 01:04:54.425


Project name

Installation location

Customer pos. No.

Date 2025-03-04

Duty chart

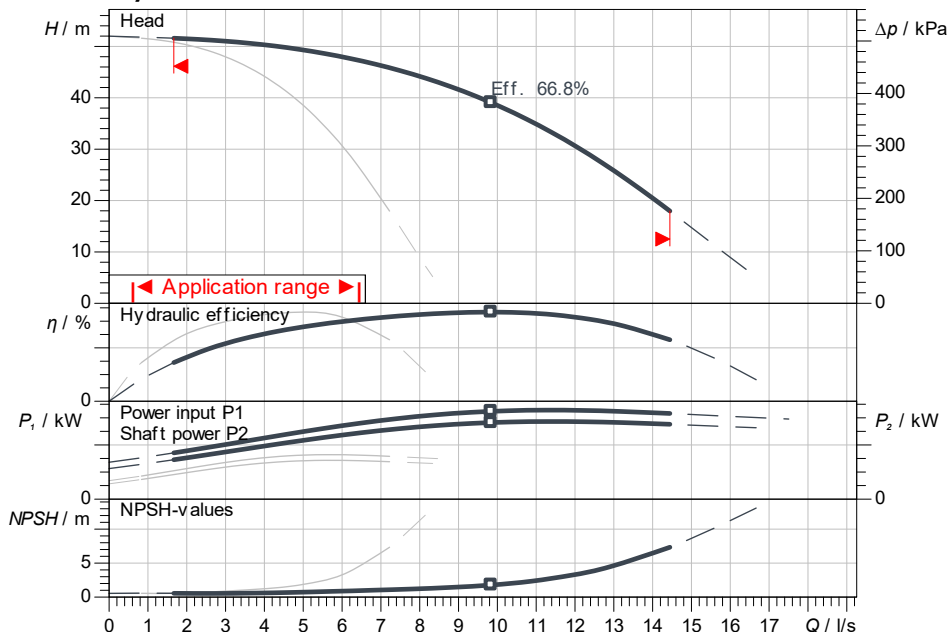

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	

Product data

Multi-pump system
SiBoost Smart 2 Helix V 1604

No. of pumps	2
Max. operating pressure	1,600 kPa
Inlet pressure max.	1,000
Fluid temperature	3 °C ... +50 °C
Max. ambient temperature	40 °C
Protection class system	IP55
Protection class of switchgear	IP54
Diaphragm pressure vessel	Yes
Low-water cut-out switchgear	No

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Rated speed	2,900 1/min
Rated power P2	3.00 kW
Rated current	5.50 A
Power factor	0.9
Efficiency	50% / 75% / 100%
Degree of protection	IP55
Insulation class	F
Motor protection	Yes

Fitting dimensions


Pipe connection on the suction side	R 2½, PN 10
Pipe connection (pressure side)	R 2½, PN 16

Materials

Pump housing	1.4301
Impeller	1.4307
Shaft	1.4301
Shaft seal	Q1BE3GG
Gasket material	EPDM
Pipework material	1.4307

Information for order placements

Weight approx.	181 kg
Item number	2536154

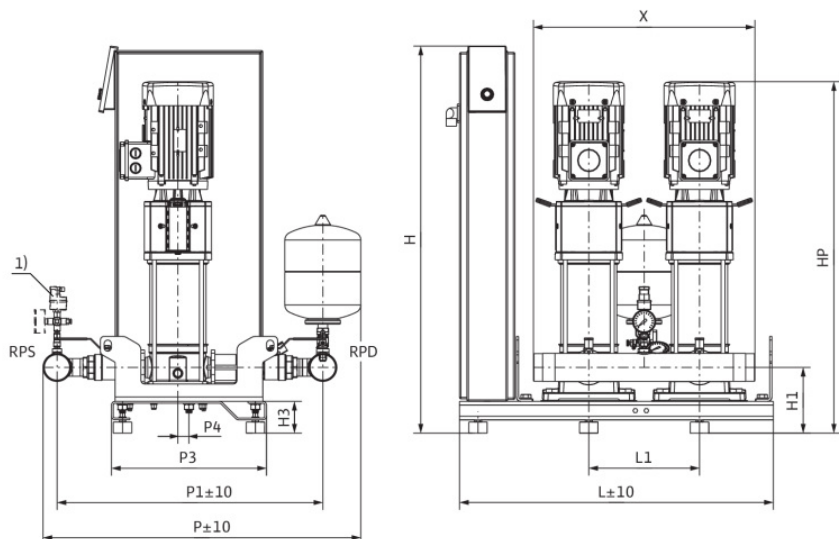

Dimensions

mm

DNd	R 2½, PN	H3	90	LS	150	X	600
DNs	R 2½, PN	HP	928	P	845		
H	1,055	HS	950	P1	720		
H1	185	L	850	P3	420		
H2	303	L1	300	P4	30		

Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Multi-pump system
SiBoost Smart 2 Helix V 1604

Project ID Untitled project 2025-03-04 01:04:54.425

Project name
Installation location
Customer pos. No.

Date 2025-03-04

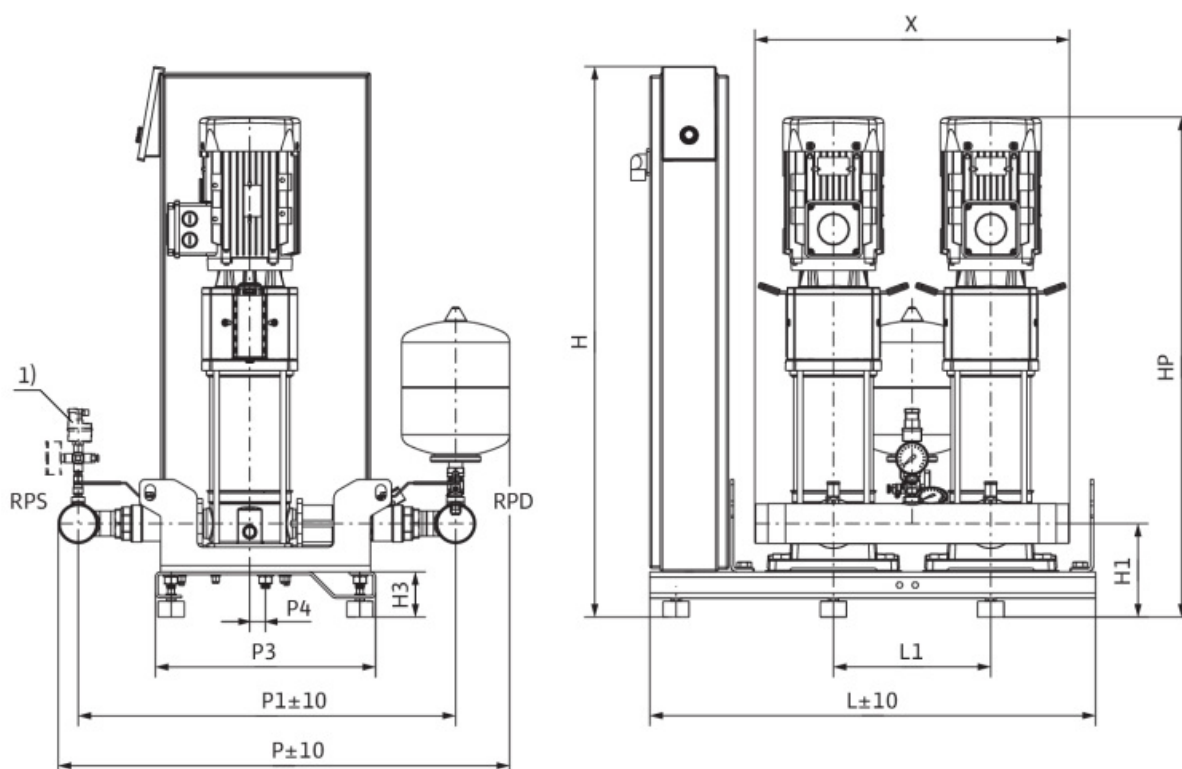

Standard

Suction side R 2½, PN 10/PN 16

Discharge side R 2½, PN 10/PN 16

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
DNd	R 2½, PN 16	HS	950	P4	30		
DNs	R 2½, PN 10	L	850	X	600		
H	1,055	L1	300				
H1	185	LS	150				
H2	303	P	845				
H3	90	P1	720				
HP	928	P3	420				