Contact
E-mail
Phone

Customer

Contact
E-mail
Phone

Technical data

Self-priming multistage centrifugal pump
Initial JET System 3-4-19

Project ID Untitled project 2025-03-03 22:14:23.954

Project name
Installation location
Customer pos. No.

Date 2025-03-03

Duty chart

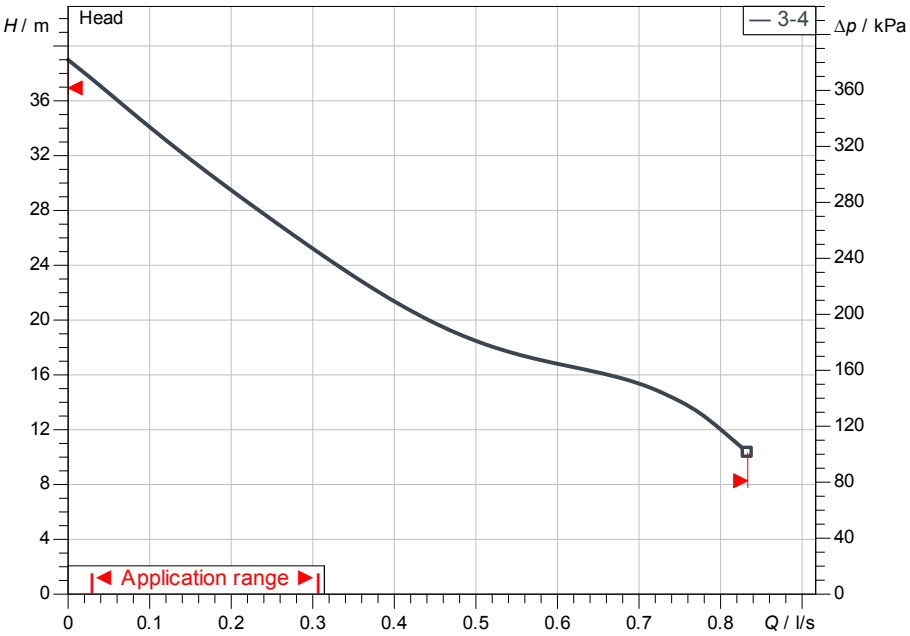

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m³
Kin. viscosity	1.00 mm²/s

Hydraulic data (Duty point)

Flow	
Head	

Product data

Self-priming multistage centrifugal pump	
Initial JET System 3-4-19	
Max. operating pressure	600 kPa
Inlet pressure max.	200 kPa
Max. suction head	
Fluid temperature	5 °C ... +35 °C
Max. ambient temperature	40 °C
Gross volume	
Protection class	IPX4

Motordata per Motor/Pump

Mains connection	1~230 V / 50 Hz
Permitted voltage tolerance	+-10 %
Rated speed	2,850 1/min
Rated power P2	0.60 kW
Rated current	3.80 A
Power factor	
Insulation class	F
Motor protection	

Fitting dimensions

Pipe connection on the suction side	-
Pipe connection (pressure side)	,

Materials

Pump housing	EN-GJL-200
Impeller	PPE/PS-GF20
Shaft	1.0301
Shaft seal	BQ1PFF
Gasket material	NBR

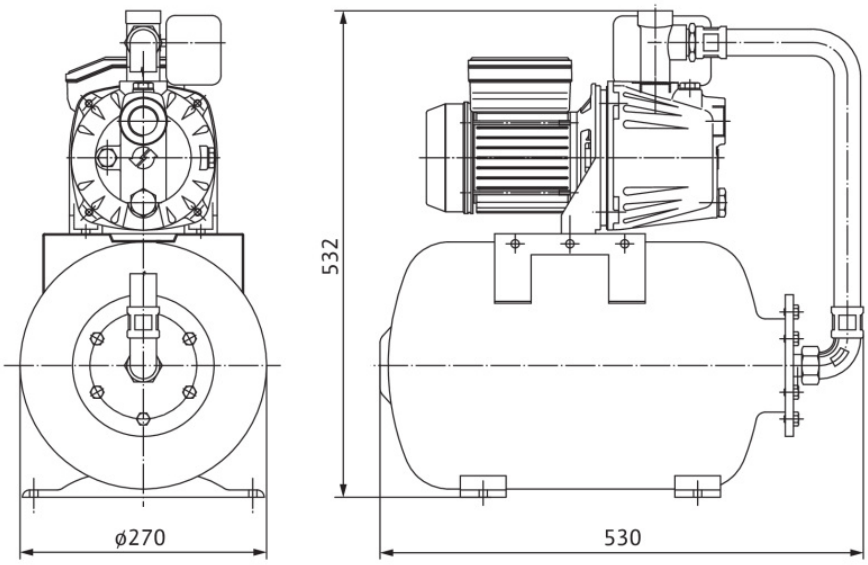

Information for order placements

Weight approx.	16.2 kg
Item number	4185608

Dimensions mm