

Contact
E-mail
Phone

Customer

Contact
E-mail
Phone

Dimensions

Glanded monobloc pump
BM-B 32/265-17/2

Project ID


Untitled project 2025-03-01 21:27:50.947

Project name

Installation location

Customer pos. No.

Date 2025-03-01

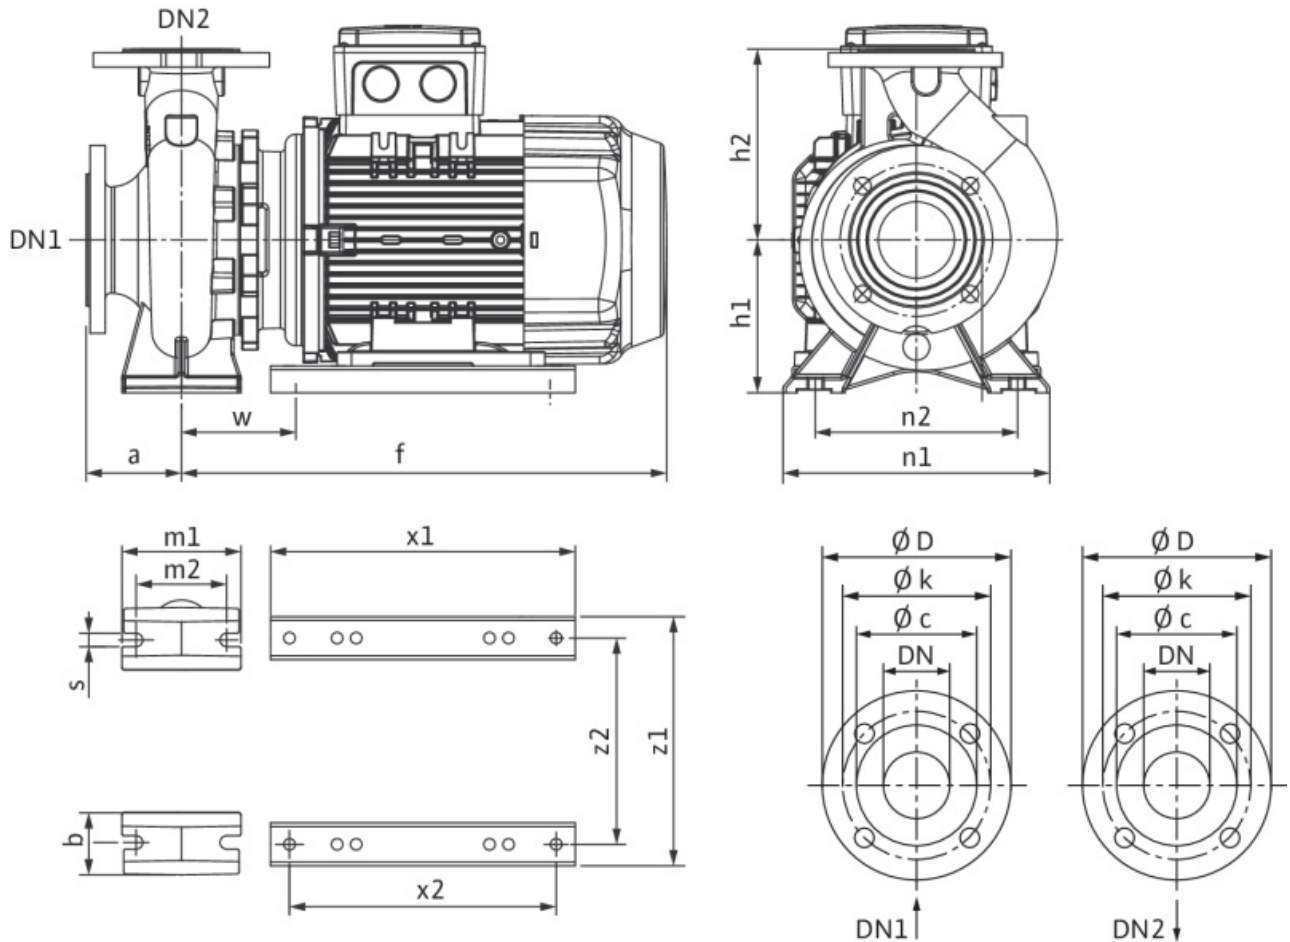

Standard

Suction side DN 50, PN 10
Discharge side DN 32, PN 10

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
a	100	h1	180	Ø k	100	x2	280
b	65	h2	225	Ø d	99	z1	261
d	12	m1	125	Ø D	165	z2	216
dL	19	m2	95	Ø D	140		
DN1	DN 50, PN 10	n1	320	s	14		
DN2	DN 32, PN 10	n2	250	w	114		
f	565	Ø k	125	x1	320		

Customer

Technical data


Glanded monobloc pump BM-B 32/265-17/2

Project ID Untitled project 2025-03-01 21:27:50.947

Project name
Installation location
Customer pos. No.

Date 2025-03-01

Duty chart

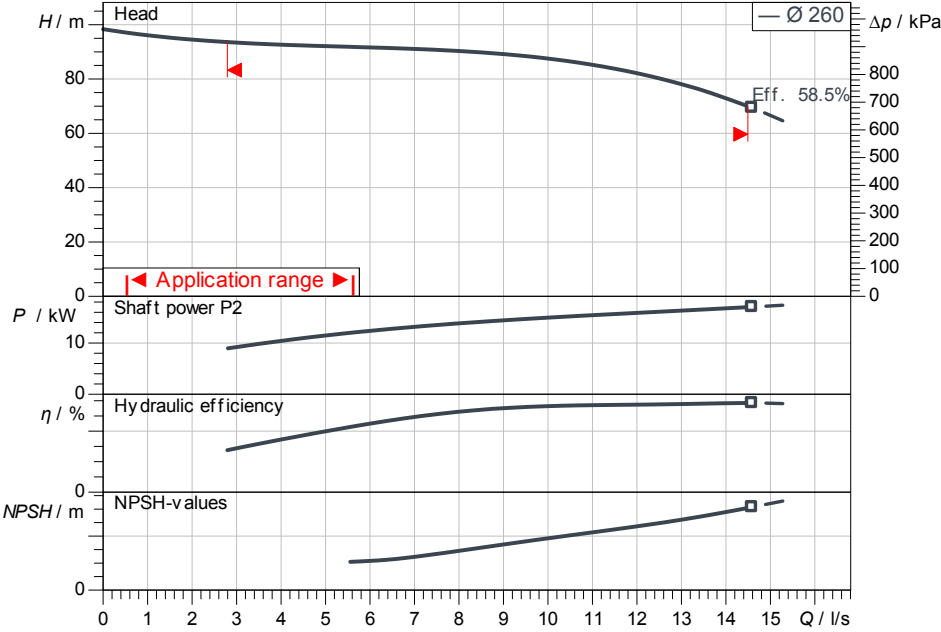

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

Product data

Glanded monobloc pump	
BM-B 32/265-17/2	
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +90 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Rated speed	2,900 1/min
Rated power P2	17.00 kW
Rated current	30.20 A
Power factor	0.89
Efficiency	
50% / 75% / 100%	92.2/ 92.6/ 92.2%
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions


Pipe connection on the suction side	DN 50, PN 10
Pipe connection (pressure side)	DN 32, PN 10
Port to Port	-

Materials

Pump housing	Bronze, G-CuSn10
Impeller	Bronze, G-CuSn10
Shaft	1.4362
Shaft seal	Q1Q1VGG

Information for order placements

Weight approx.	119 kg
Item number	2164383

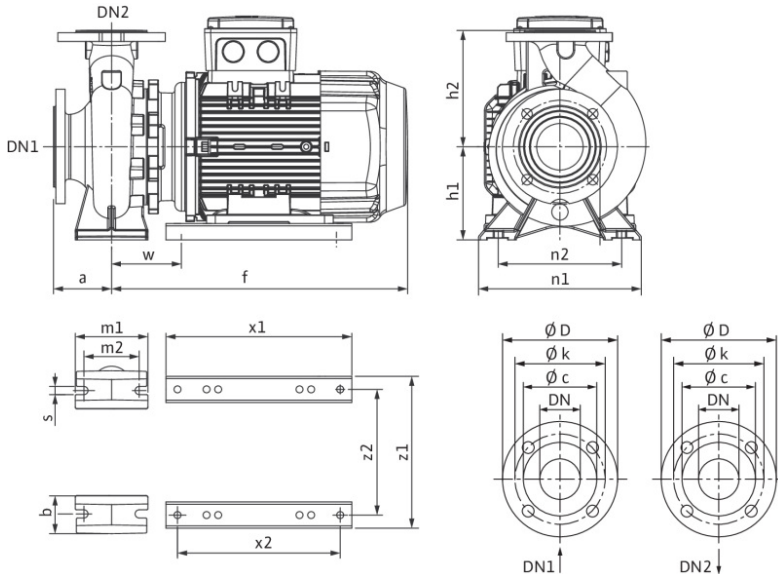



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone

Hydraulic data

Glanded monobloc pump
BM-B 32/265-17/2

Project ID Untitled project 2025-03-01 21:27:50.947


Project name
Installation location
Customer pos. No.

Date 2025-03-01

Operating data

Rotational speed 2900 1/min	Frequency 50 Hz	Duty point Q =	H =	Suction port DN 50	Discharge port DN 32
---------------------------------------	---------------------------	--------------------------	------------	------------------------------	--------------------------------

Power data referred to: Water; 20°C; 998.3kg/m³; 1.005mm²/s ±10 % tolerance with linear U/f frequency control

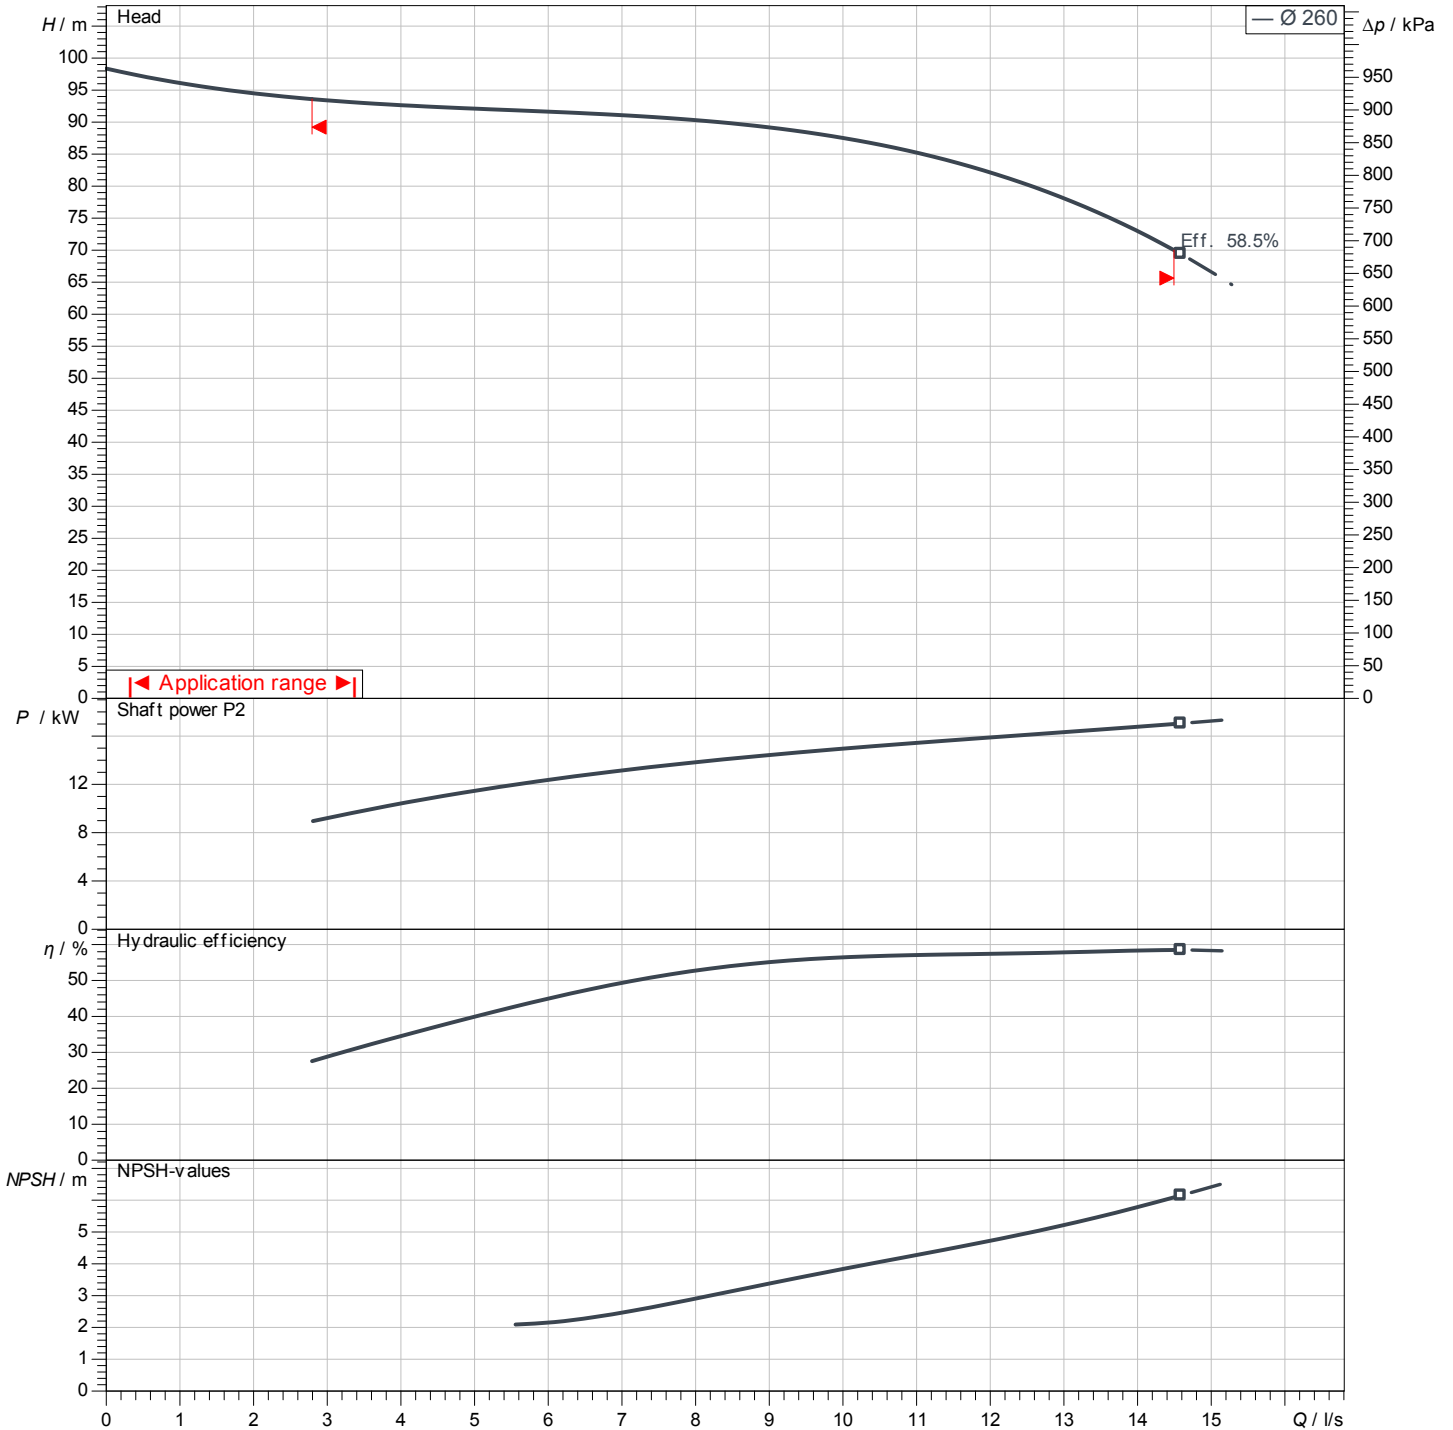

No test norm defined for this product