

Customer

Technical data


High-pressure multistage centrifugal pump Helix VE 2207-2/25/V/KS/3

Project ID Untitled project 2025-03-03 15:12:38.853

Project name
Installation location
Customer pos. No.

Date 2025-03-03

Duty chart

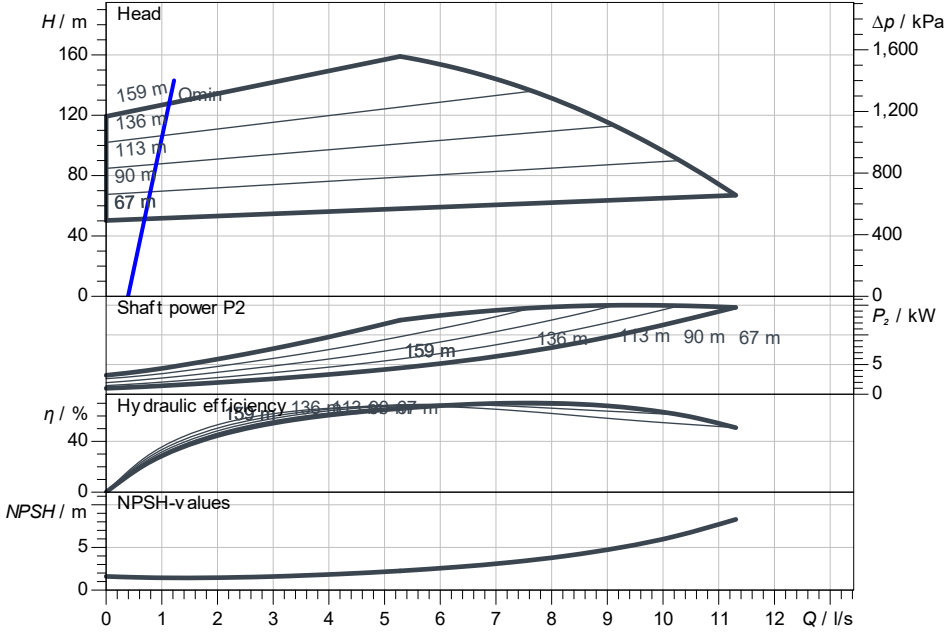

Requested data

Flow
Head
Media Water 100 %
Fluid temperature 20.00 °C
Density 998.30 kg/m³
Kin. viscosity 1.00 mm²/s

Hydraulic data (Duty point)

Flow
Head
Shaft power P2
Hydraulic efficiency
NPSH

Product data

High-pressure multistage centrifugal pump
Helix VE 2207-2/25/V/KS/3
Max. operating pressure 2,500 kPa
Inlet pressure max. 10 bar
Fluid temperature -15 °C ... +90 °C
Max. ambient temperature 50 °C
Minimum efficiency index (MEI) ≥ 0.7

Motordata per Motor/Pump

Motor efficiency level IE5
Mains connection 3~ 400 V / 50 Hz
Permitted voltage tolerance
Rated speed
Rated power P2 15.00 kW
Rated current 26.70 A
Power factor
Service factor 0
Degree of protection IP55
Insulation class F
Motor protection

Fitting dimensions

Pipe connection on the suction side DN 50, PN 25
Pipe connection (pressure side) DN 50, PN 25

Materials

Pump housing 1.4409
Impeller 1.4404
Shaft 1.4404
Shaft seal BQ7VGG
Gasket material FKM

Information for order placements

Weight approx. 159 kg
Item number 4256786

ISO 9906: 2012 3B

Dimensions

H 1,40
H2 947
ØM 217
X 386
X 386

mm

