

**Customer**


## Technical data

### Multi-pump system CO-4 Helix V 3606/K/CC-01

Project ID: Untitled project 2025-03-02 00:16:13.422

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-02

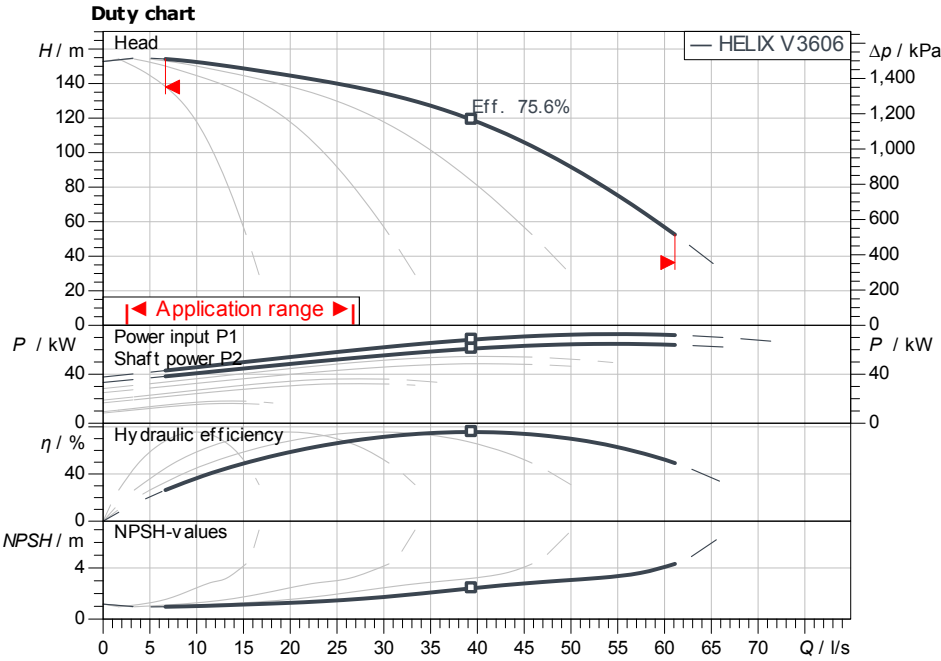

**Requested data**

Flow  
Head  
Media: Water 100 %  
Fluid temperature: 20.00 °C  
Density: 998.30 kg/m<sup>3</sup>  
Kin. viscosity: 1.00 mm<sup>2</sup>/s

**Hydraulic data (Duty point)**

Flow  
Head  
Shaft power P2

**Product data**

Multi-pump system  
CO-4 Helix V 3606/K/CC-01  
Control: Without frequency conversion  
No. of pumps: 4  
Max. operating pressure: 1,600 kPa  
Inlet pressure max.: 1,000 kPa  
Fluid temperature: 3 °C ... +50 °C  
Max. ambient temperature: 40 °C  
Protection class motor: IP55  
Protection class of switchgear: IP54  
Diaphragm pressure vessel: Yes  
Low-water cut-out switchgear: No

**Motordata per Motor/Pump**

Motor efficiency level: IE3  
Mains connection: 3~ 400 V / 50 Hz  
Permitted voltage tolerance: +10 %  
Rated speed: 2,900 1/min  
Rated power P2: 18.50 kW  
Rated current: 32.80 A  
Power factor: 0.89  
Efficiency: 91.6%/92.5%/92.4%  
Insulation class: F  
Motor protection: Yes

**Fitting dimensions**


Pipe connection on the suction side: DN 150, PN 10  
Pipe connection (pressure side): DN 150, PN 16

**Materials**

Pump housing: 1.4409  
Impeller: 1.4404  
Shaft: 1.4404  
Shaft seal: Q1BE3GG  
Gasket material: FKM  
Pipework material: 1.4404

**Information for order placements**

Weight approx.: 1190.5 kg  
Item number: 2532363

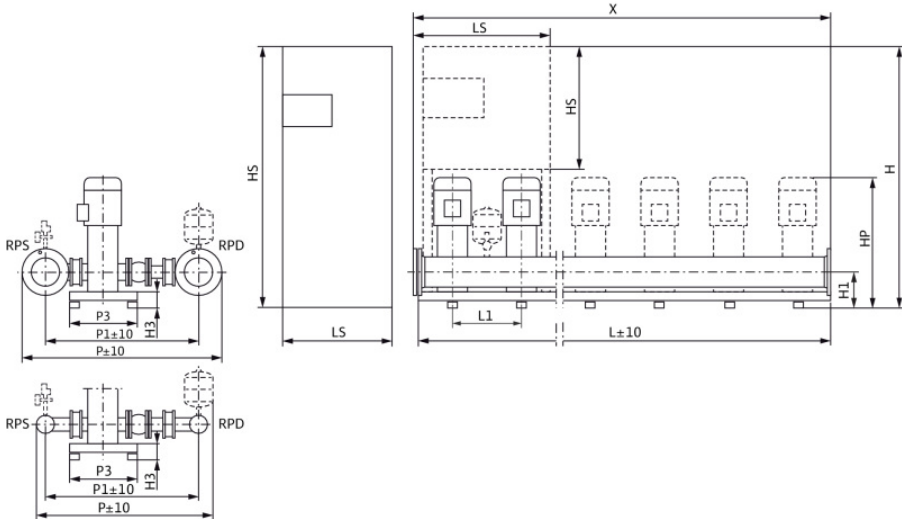

**Dimensions**

mm

DNd	DN 150, PN	HP	1,537	P	1,369
DNs	DN 150, PN	HS	1,900	P1	1,084
H	1,900	L	2,080	P3	500
H1	277	L1	500	P4	30
H3	122	LS	600	X	2,000

Contact  
E-mail  
Phone

**Customer**

Contact  
E-mail  
Phone

## Dimensions

### Multi-pump system

CO-4 Helix V 3606/K/CC-01

Project ID


Untitled project 2025-03-02 00:16:13.422

Project name

Installation location

Customer pos. No.

Date 2025-03-02

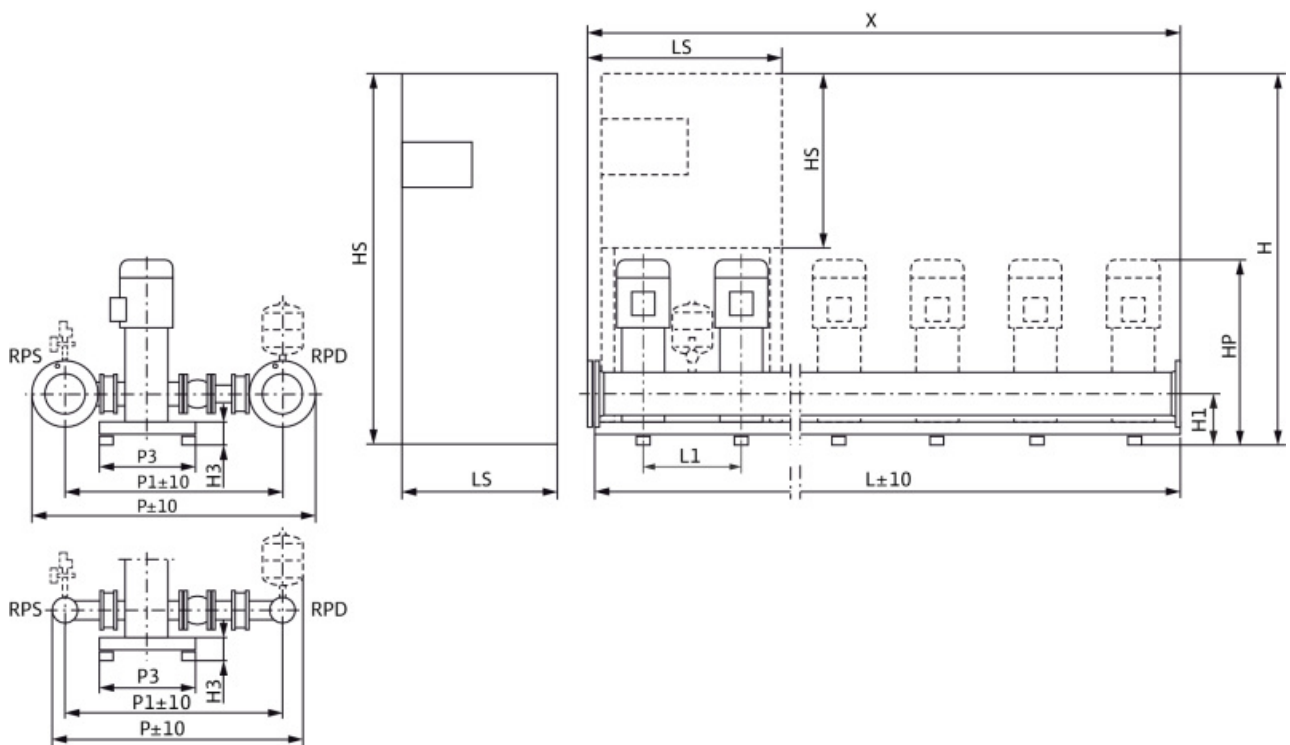

**Standard**

Suction side DN 150, PN 10/PN 16  
Discharge side DN 150, PN 10/PN 16

**Dimensions** mm

Name	Value	Name	Value	Name	Value	Name	Value
DNd	DN 150, PN 16	L	2,080	X	2,000		
DNs	DN 150, PN 10	L1	500				
H	1,900	LS	600				
H1	277	P	1,369				
H3	122	P1	1,084				
HP	1,537	P3	500				
HS	1,900	P4	30				