

**Customer**


## Technical data

### Glandless high-efficiency pump Stratos PICO 25/0,5-4-130

Project ID                      Untitled project 2025-03-05 08:57:18.785

Project name  
Installation location  
Customer pos. No.

Date                      2025-03-05

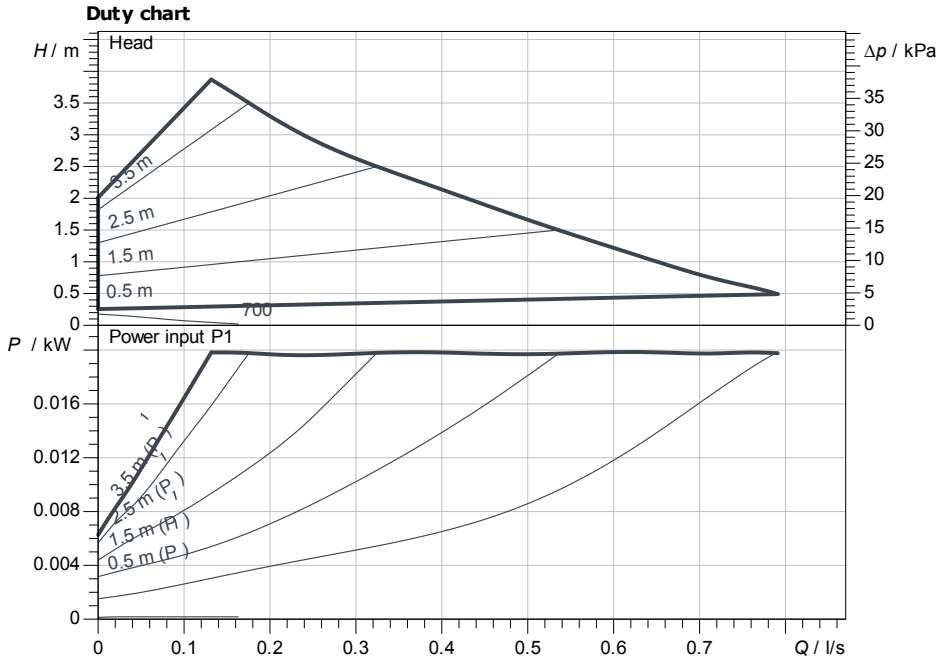

#### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

#### Hydraulic data (Duty point)

Flow	
Head	
Power input P1	

#### Product data

Glandless high-efficiency pump	
Stratos PICO 25/0,5-4-130	
Kind of operation	dp-v
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +110 °C
Max. ambient temperature	40 °C
Minimum suction head at 50 / 95 / 110 °C	0.5 / 3 / 10

#### Motordata per Motor/Pump

Motor design	EC motor
Energy efficiency index (EEI)	≤ 0.18
Mains connection	1~ 230 V / 60 Hz
Permitted voltage tolerance	+/- 10 %
Max. speed	3,400 1/min
Power input P1	0.02 kW
Current consumption	0.26 A
Degree of protection	IPX4D
Insulation class	F
Motor protection	integrated
Electromagnetic compatibility	EN 61800-3
Emitted interference	EN 61000-6-3
Interference resistance	EN 61000-6-2
Threaded cable connection	1 x PG11

#### Fitting dimensions

Pipe connection on the suction side	G 1½, PN 10
Pipe connection (pressure side)	G 1½, PN 10
Port to Port	130 mm

#### Materials

Pump housing	EN-GJL-200
Impeller	PP-GF40
Shaft	1.4122
Bearing	Carbon, metal-impregnated

#### Information for order placements

Weight approx.	1.7 kg
Item number	4244394

