

**Customer**

## Technical data


### Glanded monobloc pump Atmos GIGA-B 150/230-18,5/4

Project ID: Untitled project 2025-03-01 17:45:51.999

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-01

#### Duty chart

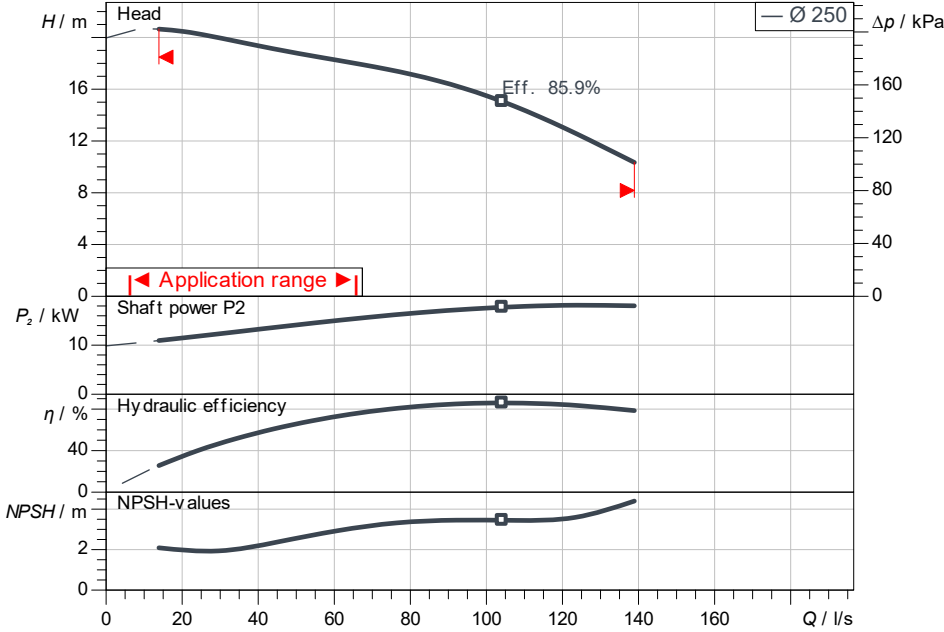

#### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

#### Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

#### Product data

Glanded monobloc pump	
Atmos GIGA-B 150/230-18,5/4	
Max. operating pressure	1,600 kPa
Fluid temperature	-20 °C ... +140 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

#### Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Rated speed	1,450 1/min
Rated power P2	18.50 kW
Rated current	34.81 A
Power factor	0.83
Efficiency	50% / 75% / 100%
	91.7/ 92.5/ 92.2%
Degree of protection	IP55
Insulation class	F
Motor protection	PTC integrated

#### Fitting dimensions

Pipe connection on the suction side	DN 200, PN 16
Pipe connection (pressure side)	DN 150, PN 16
Port to Port	-

#### Materials

Pump housing	5.1301, EN-GJL-250 cataphoretic-coated
Impeller	EN-GJL-200
Lantern	5.1301, EN-GJL-250 cataphoretic-coated
Shaft	1.4122
Shaft seal	AQ1EGG

#### Information for order placements

Weight approx.	348 kg
Item number	2151504

