



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Glanded monobloc pump
BM-S 50/140-0,55/4

Project ID Untitled project 2025-03-01 21:27:50.947

Project name
Installation location
Customer pos. No.

Date 2025-03-01

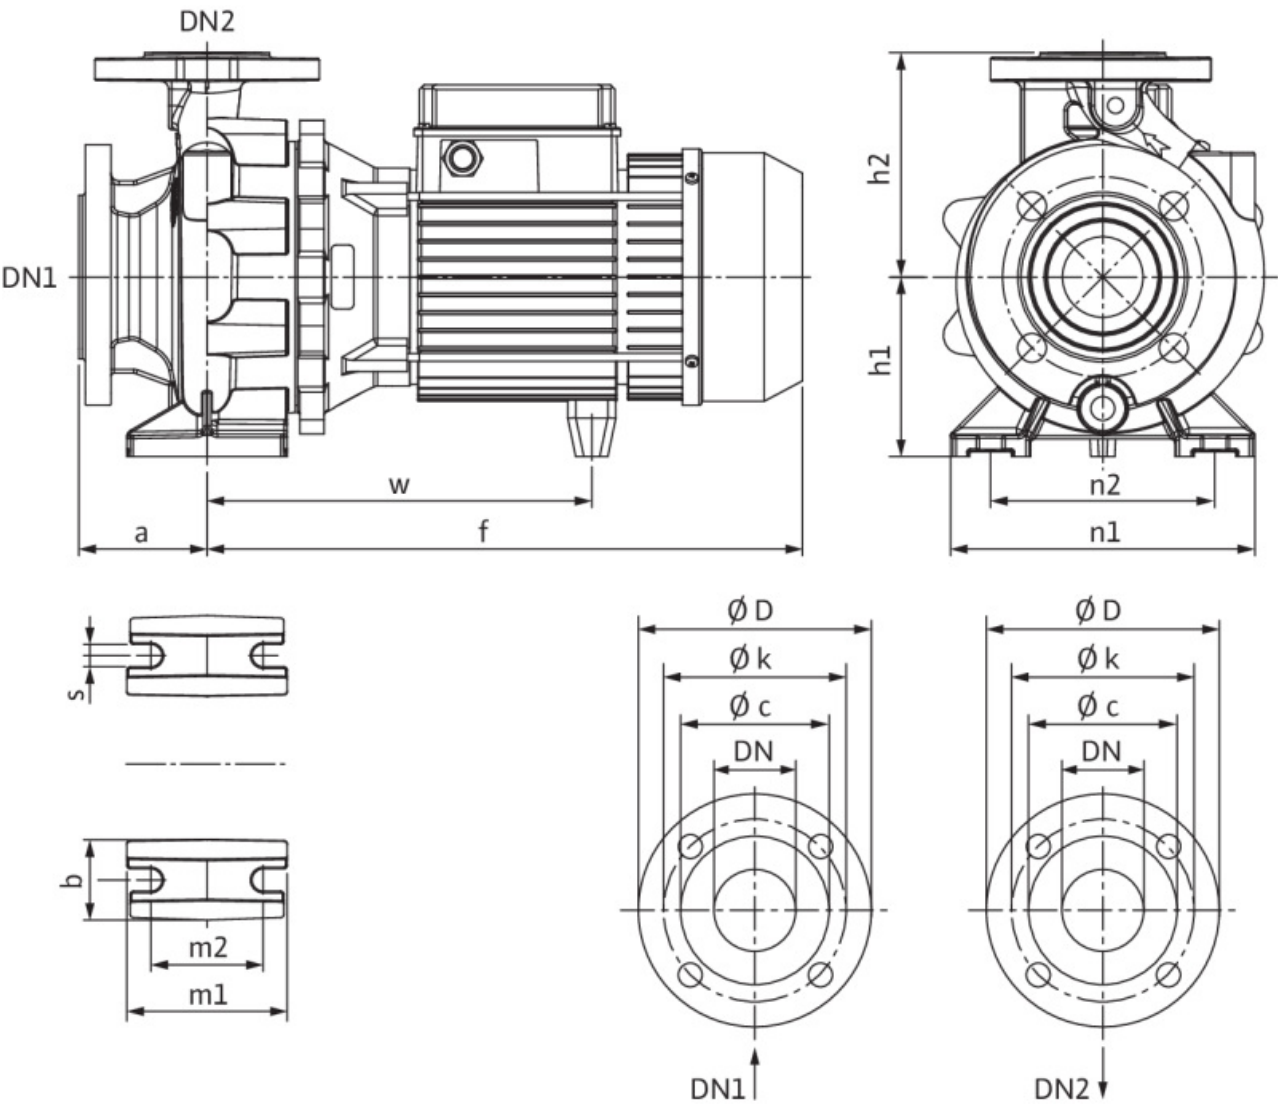

Standard

Suction side DN 65, PN 10
Discharge side DN 50, PN 10

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
a	100	h2	160	Ø D	185		
b	50	m1	100	Ø D	165		
dL	18	m2	70	s	14		
DN1	DN 65, PN 10	n1	240	w	240		
DN2	DN 50, PN 10	n2	190				
f	335	Ø k	145				
h1	132	Ø k	125				

Technical data

Glanded monobloc pump

BM-S 50/140-0,55/4

Project ID

Untitled project 2025-03-01 21:27:50.947



Project name

Installation location

Customer pos. No.

Date 2025-03-01

Duty chart

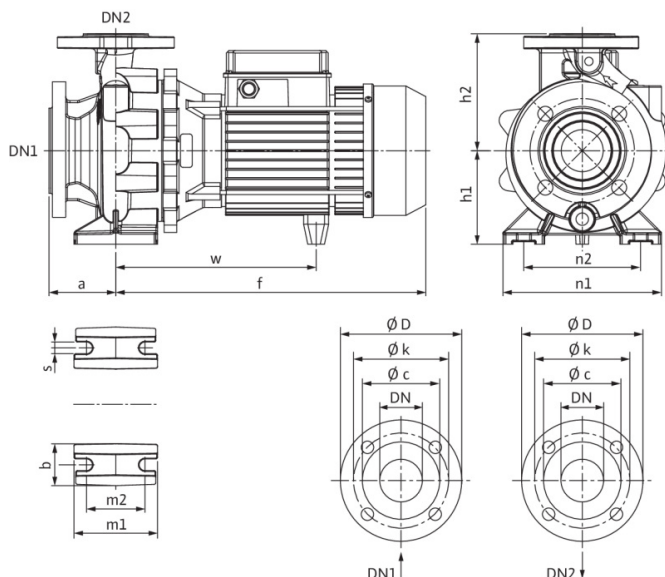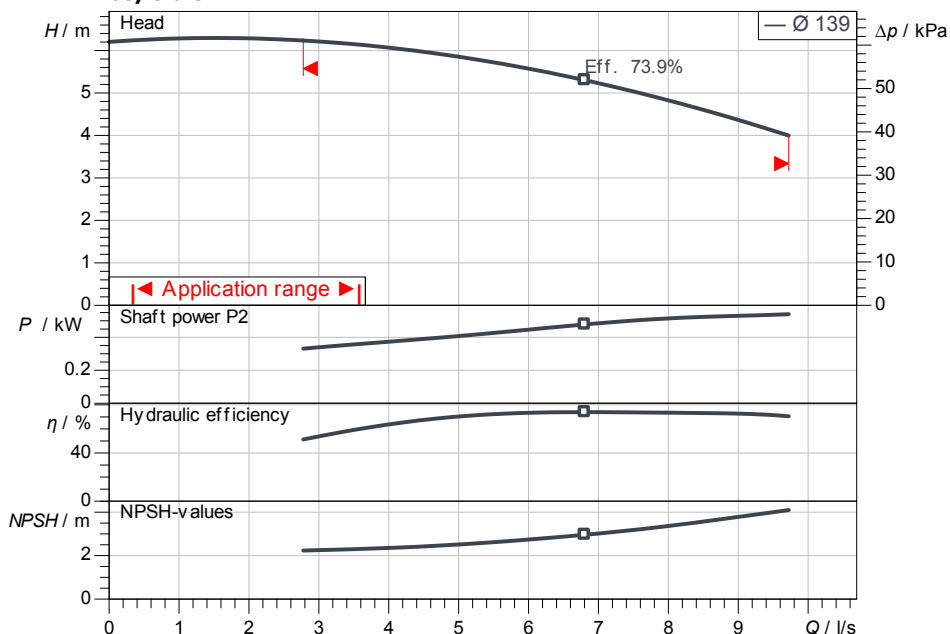

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m³
Kin. viscosity	1.00 mm²/s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

Product data

Glanded monobloc pump	
BM-S 50/140-0,55/4	
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +90 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Rated speed	1,450 1/min
Rated power P2	0.55 kW
Rated current	1.28 A
Power factor	0.64
Efficiency	
50% / 75% / 100%	78.2/ 79.5/80.8%
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions

Pipe connection on the suction side	DN 65, PN 10
Pipe connection (pressure side)	DN 50, PN 10
Port to Port	-

Materials

Pump housing	1.4408
Impeller	1.4408
Shaft	1.4362
Shaft seal	Q1Q1VGG

Information for order placements

Weight approx.	32 kg
Item number	2103354

Hydraulic data

Glanded monobloc pump
BM-S 50/140-0,55/4

Project ID

Untitled project 2025-03-01 21:27:50.947

Project name

Installation location

Customer pos. No.

Date 2025-03-01

Operating data

Rotational speed	Frequency	Duty point		Suction port	Discharge port
1450 1/min	50 Hz	Q =	H =	DN 65	DN 50

