

**Customer**

## Technical data


### Glanded energy-saving twin-head pump DL-E 125/240-11/4

Project ID                      Untitled project 2025-03-03 05:48:28.279

Project name  
Installation location  
Customer pos. No.

Date                      2025-03-03

#### Duty chart

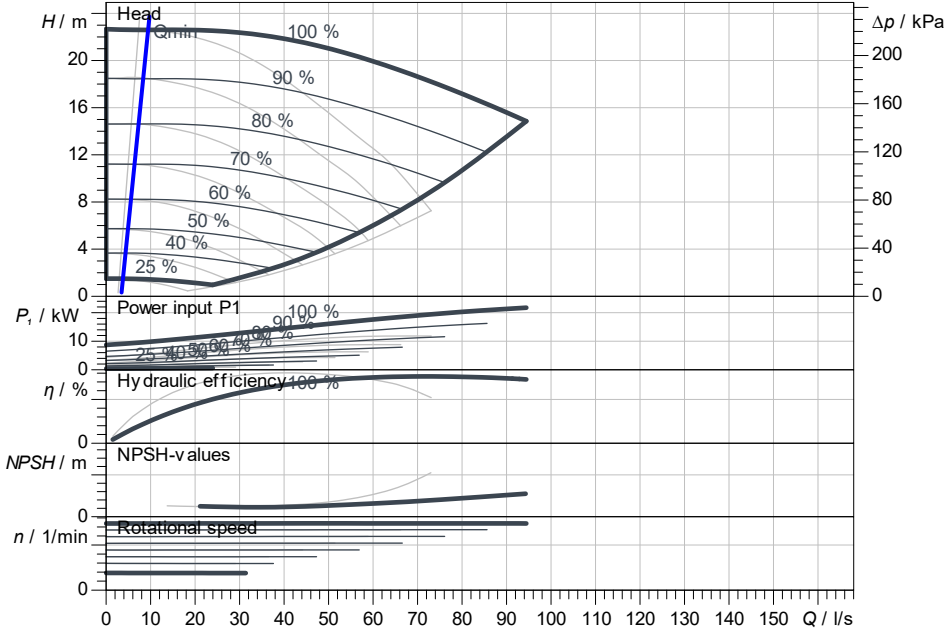

#### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

#### Hydraulic data (Duty point)

Flow	
Head	
Power input P1	
NPSH	

#### Product data

Glanded energy-saving twin-head pump	
DL-E 125/240-11/4	
Kind of operation	n-const ADD
Max. operating pressure	1,600 kPa
Fluid temperature	-20 °C ... +140 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

#### Motordata per Motor/Pump

Motor design	AC motor
Efficiency class	IE4
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Max. speed	1,480 1/min
Rated power P2	11.10 kW
Rated current	19.10 A
Degree of protection	IP55
Insulation class	F
Motor protection	PTC integrated

#### Fitting dimensions

Pipe connection on the suction side	DN 125, PN 16
Pipe connection (pressure side)	DN 125, PN 16
Port to Port	620 mm

#### Materials

Pump housing	5.1301, EN-GJL-250 cataphoretic-
Impeller	EN-GJL-200
Lantern	5.1301, EN-GJL-250 cataphoretic-
Shaft	1.4122
Shaft seal	AQ1EGG

#### Information for order placements

Weight approx.	489 kg
Item number	2222908

