

Customer

Dimensions

Glanded monobloc pump
BM-S 65/200-3/4

Project ID


Untitled project 2025-03-17 01:38:16.703

Project name

Installation location

Customer pos. No.

Date 2025-03-17

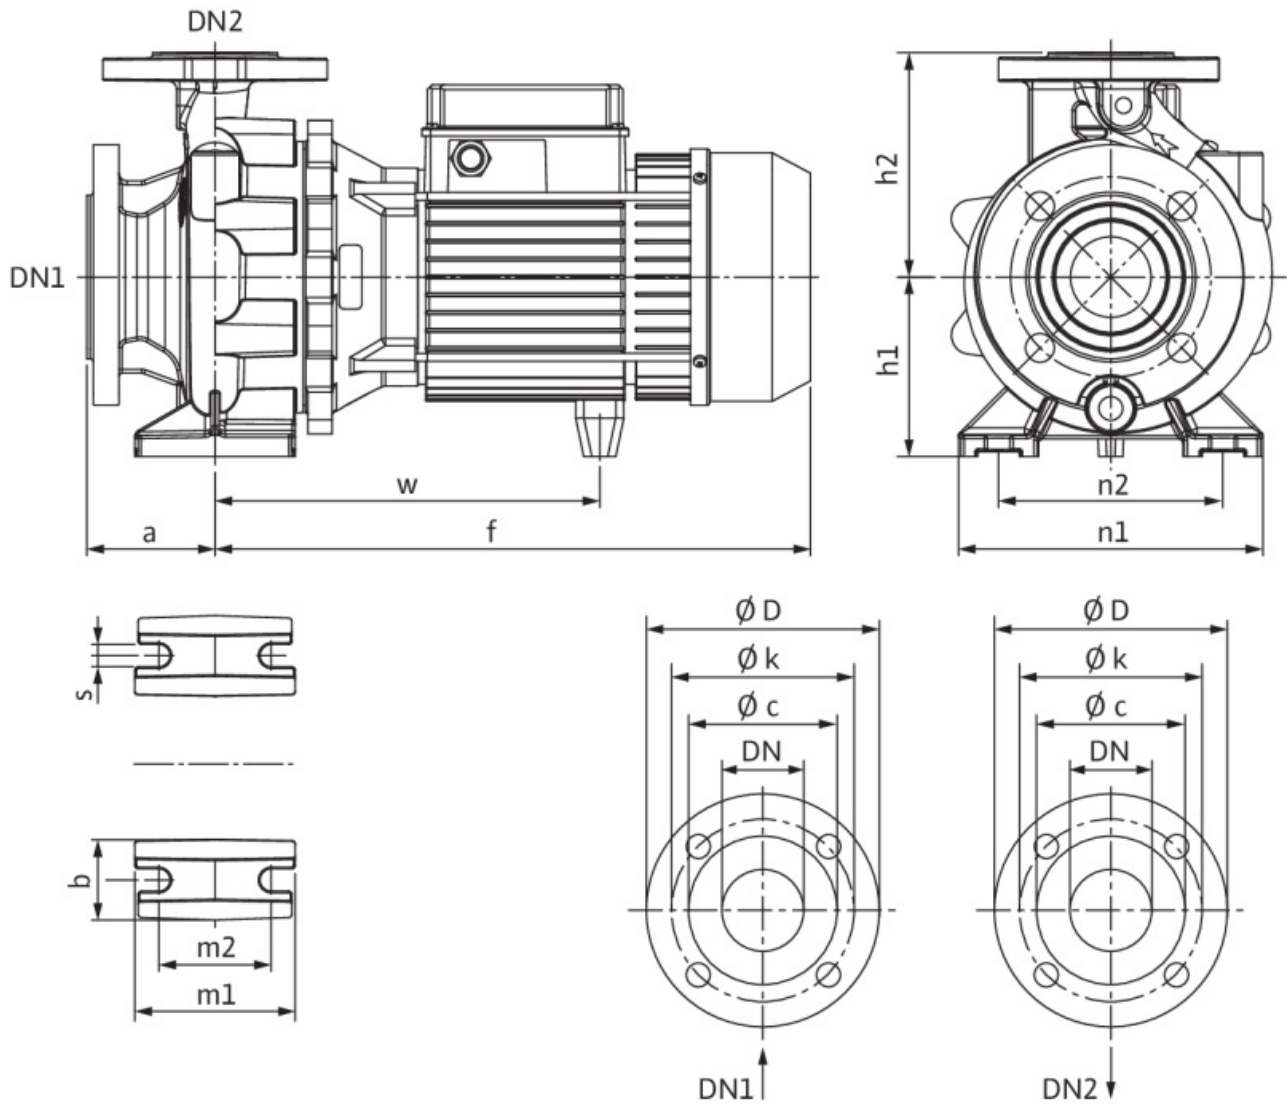

Standard

Suction side DN 80, PN 10
Discharge side DN 65, PN 10

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
a	100	h2	225	ØD	200		
b	65	m1	125	ØD	185		
dL	18	m2	95	s	14		
DN1	DN 80, PN 10	n1	320	w	312		
DN2	DN 65, PN 10	n2	250				
f	461	Ø k	160				
h1	180	Ø k	145				

Customer

Technical data



Glanded monobloc pump BM-S 65/200-3/4

Project ID Untitled project 2025-03-17 01:38:16.703

Project name
Installation location
Customer pos. No.

Date 2025-03-17

Duty chart

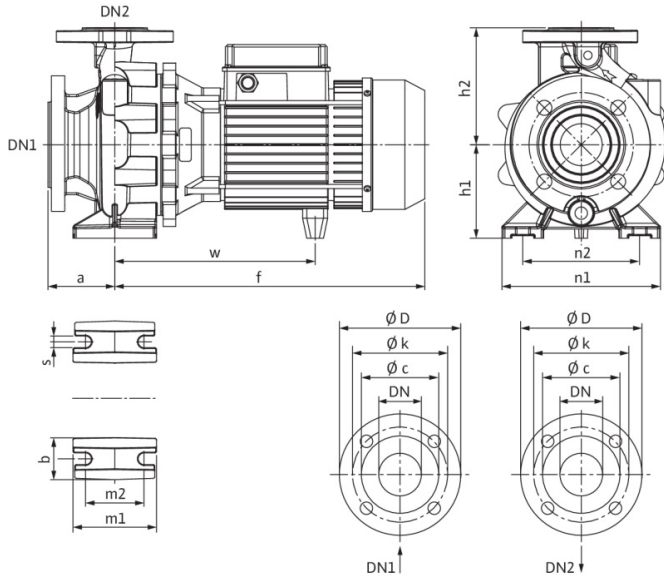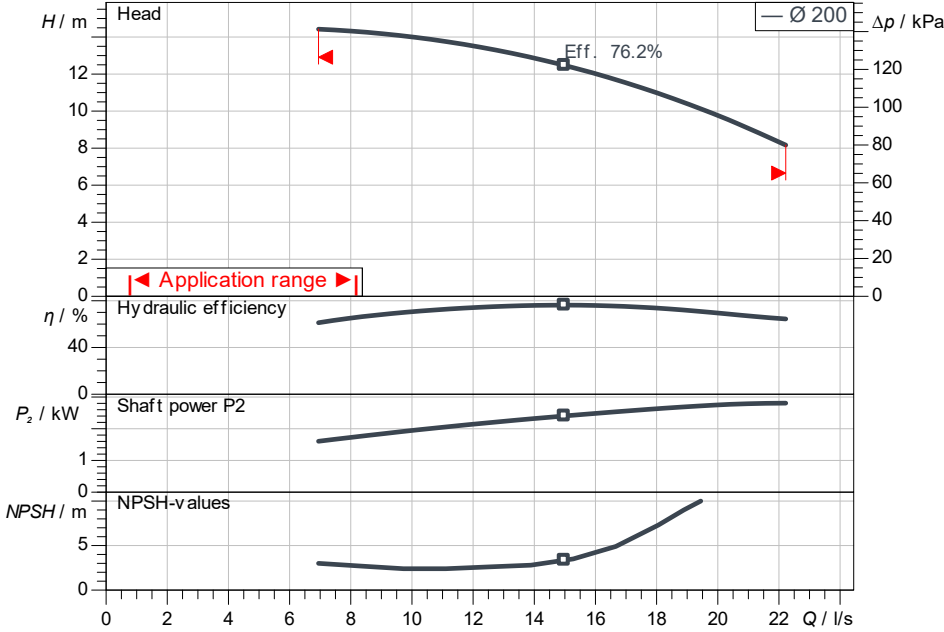

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

Product data

Glanded monobloc pump	
BM-S 65/200-3/4	
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +90 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Rated speed	1,450 1/min
Rated power P2	3.00 kW
Rated current	6.47 A
Power factor	0.8
Efficiency	
50% / 75% / 100%	89.4 / 89.9 / 89.2 %
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions

Pipe connection on the suction side	DN 80, PN 10
Pipe connection (pressure side)	DN 65, PN 10
Port to Port	-

Materials

Pump housing	1.4408
Impeller	1.4408
Shaft	1.4362
Shaft seal	Q1Q1VGG

Information for order placements

Weight approx.	61 kg
Item number	2103362

Hydraulic data

Glanded monobloc pump
BM-S 65/200-3/4

Project ID Untitled project 2025-03-17 01:38:16.703


Project name
Installation location
Customer pos. No.

Date 2025-03-17

Operating data

Rotational speed 1450 1/min	Frequency 50 Hz	Duty point Q =	H =	Suction port DN 80	Discharge port DN 65
---------------------------------------	---------------------------	--------------------------	------------	------------------------------	--------------------------------

Power data referred to: Water; 20°C; 998.3kg/m³; 1.005mm²/s ±10 % tolerance with linear U/f frequency control

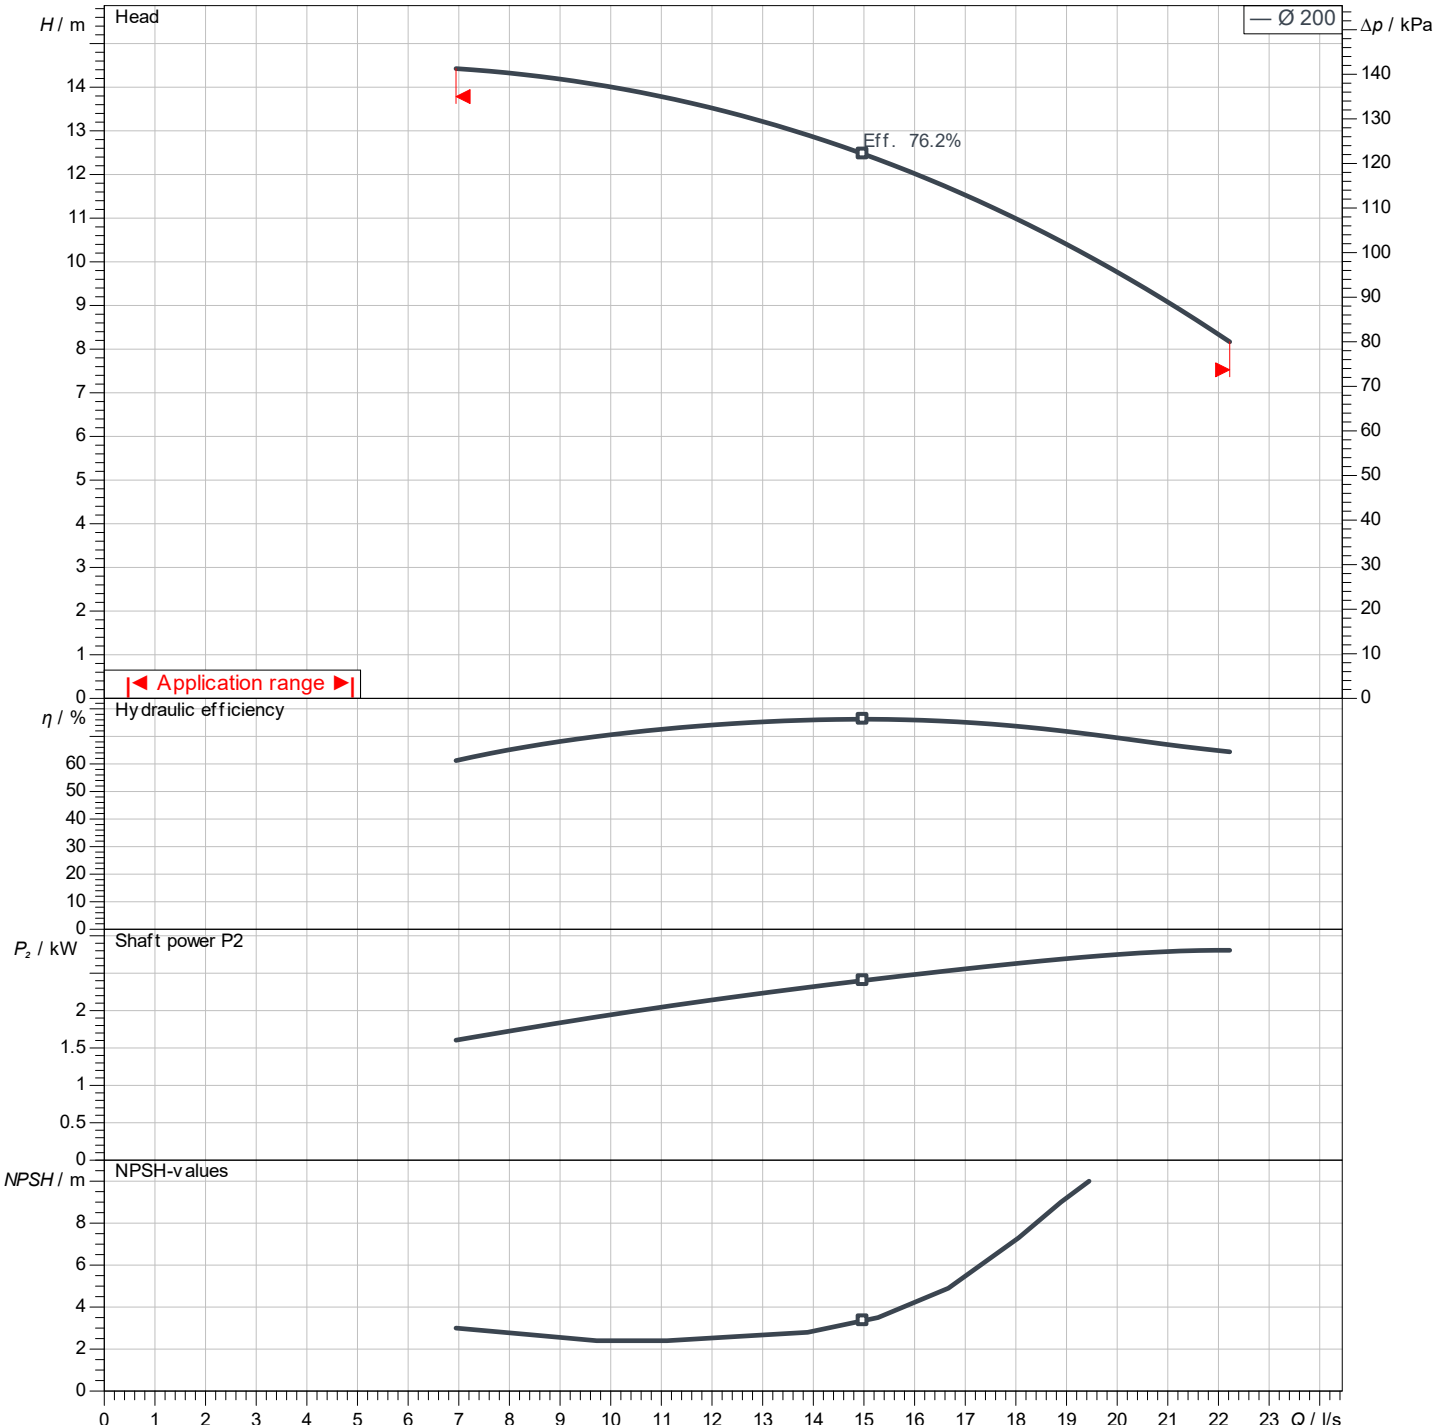

No test norm defined for this product