

Technical data

Multi-pump system

SiBoost Smart 4 Helix V 5202/2

Project ID

Untitled project 2025-03-04 01:04:54.425


Project name

Installation location

Customer pos. No.

Date 2025-03-04

Duty chart

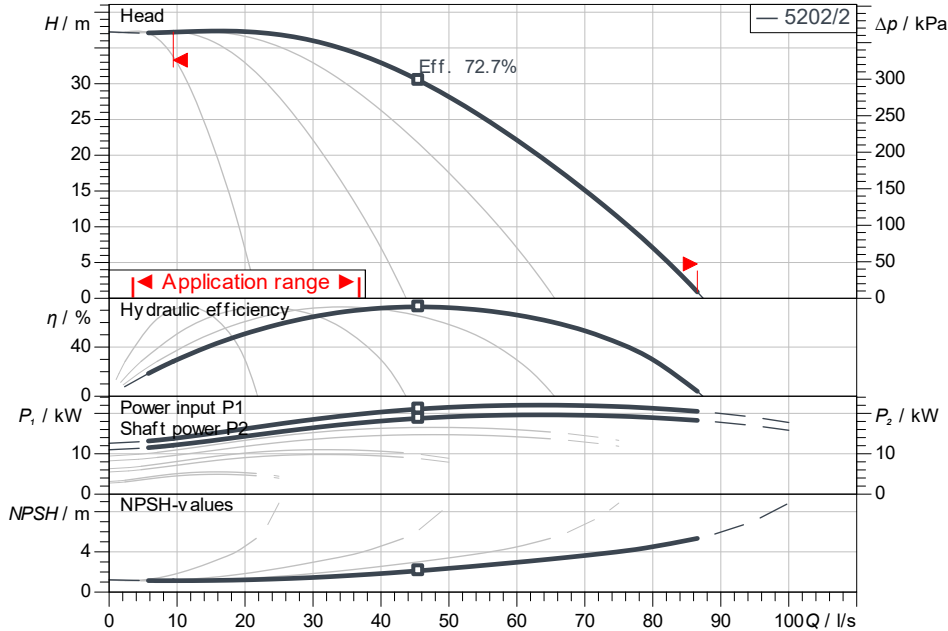

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	

Product data

Multi-pump system
SiBoost Smart 4 Helix V 5202/2

No. of pumps	4
Max. operating pressure	1,600 kPa
Inlet pressure max.	1,000
Fluid temperature	3 °C ... +50 °C
Max. ambient temperature	40 °C
Protection class system	IP55
Protection class of switchgear	IP54
Diaphragm pressure vessel	Yes
Low-water cut-out switchgear	No

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Rated speed	2,900 1/min
Rated power P2	5.50 kW
Rated current	10.50 A
Power factor	0.86
Efficiency	50 % / 75 % / 100 %
Degree of protection	IP55
Insulation class	F
Motor protection	Yes

Fitting dimensions


Pipe connection on the suction side	DN 200, PN 16
Pipe connection (pressure side)	DN 200, PN 16

Materials

Pump housing	5.1301/EN-GJL-250
Impeller	1.4307
Shaft	1.4057
Shaft seal	Q1BE3GG
Gasket material	EPDM
Pipework material	1.4307

Information for order placements

Weight approx.	737 kg
Item number	2540837

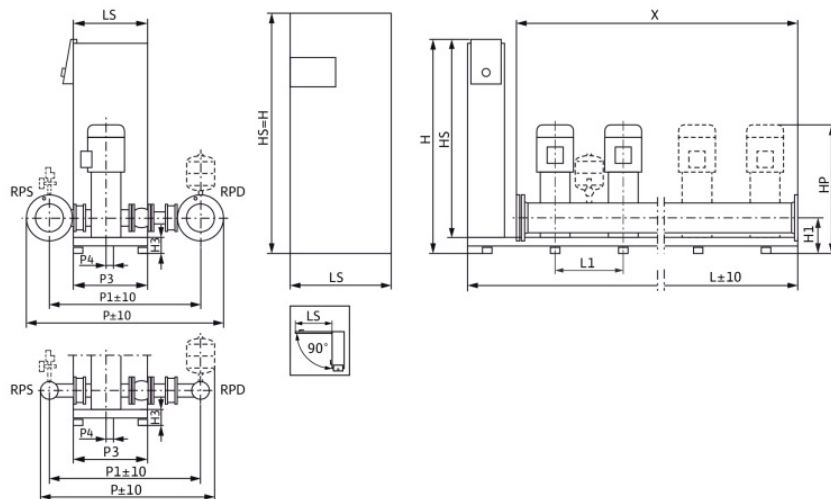

Dimensions

mm

DNd	DN 200,	H3	105	LS	250	X	2,000
DNs	DN 200,	HP	1,016	P	1,456		
H	1,405	HS	1,300	P1	1,116		
H1	245	L	2,250	P3	420		
H2	434.5	L1	500	P4	30		

