

**Customer**


# Technical data

## High-pressure multistage centrifugal pump Helix FIRST V 5204/2-5/16/E/KS/400-50

Project ID: Untitled project 2025-03-03 15:12:38.853

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-03

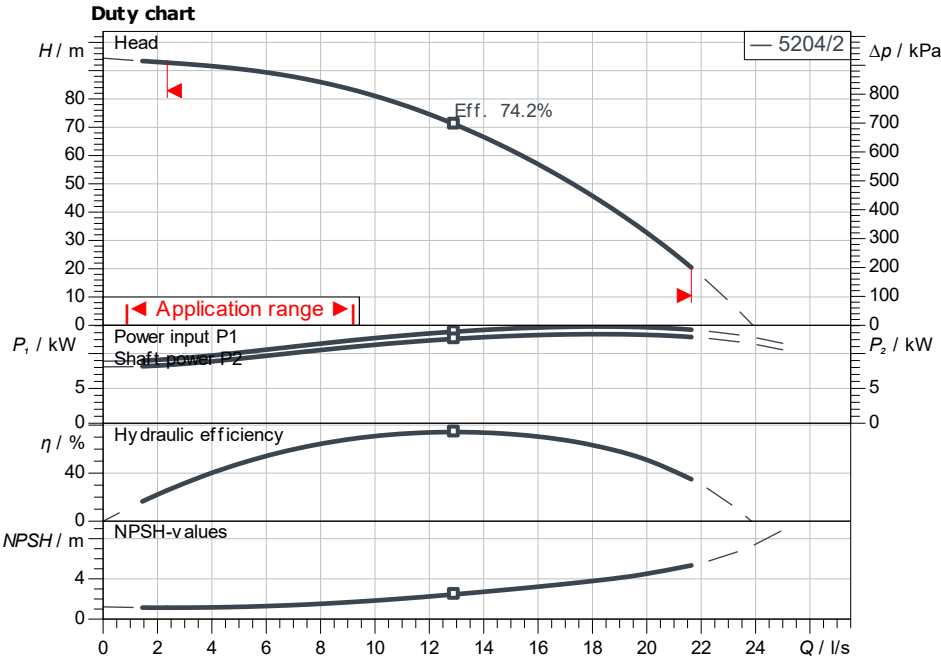

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow	
Head	
Shaft power $P_2$	
Hydraulic efficiency	
NPSH	

**Product data**

High-pressure multistage centrifugal pump	
Helix FIRST V 5204/2-5/16/E/KS/400-50	
Max. operating pressure	1,600 kPa
Inlet pressure max.	16 bar
Fluid temperature	-20 °C ... +120 °C
Max. ambient temperature	50 °C
Minimum efficiency index (MEI)	≥ 0.7

**Motordata per Motor/Pump**

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+10 %
Max. speed	2,900 1/min
Rated power $P_2$	15.00 kW
Rated current	26.70 A
Power factor	0.88
Service factor	1.15
Efficiency	50% / 75% / 100%
50% / 75% / 100%	90.2/91.8/91.9%
Degree of protection	IP55
Insulation class	F
Motor protection	No

**Fitting dimensions**

Pipe connection on the suction side	DN 80, PN 16
Pipe connection (pressure side)	DN 80, PN 16

**Materials**

Pump housing	5.1301/EN-GJL-250
Impeller	1.4307
Shaft	1.4057
Shaft seal	BQ7EGG
Gasket material	EPDM

**Information for order placements**

Weight approx.	188 kg
Item number	4215246

ISO 9906: 2012 3B

**Dimensions**

H	1,46
H2	982
ØM	305
X	218
X	200

mm

