

Customer

Technical data


Glanded standard twin-head pump DL 50/180-7,5/2

Project ID: Untitled project 2025-03-03 05:28:46.620

Project name
Installation location
Customer pos. No.

Date: 2025-03-03

Duty chart

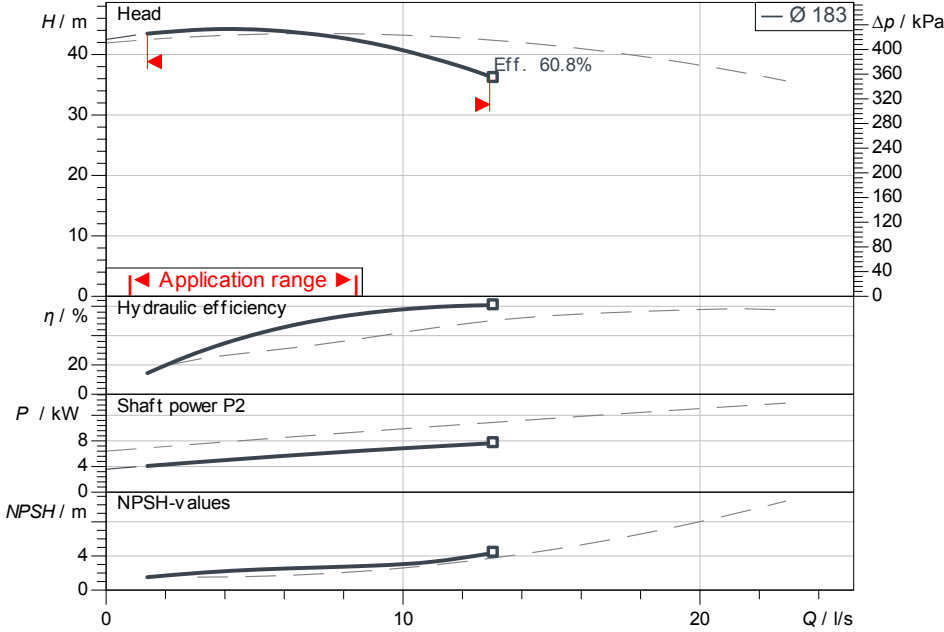

Requested data

Flow
Head
Media: Water 100 %
Fluid temperature: 20.00 °C
Density: 998.30 kg/m³
Kin. viscosity: 1.00 mm²/s

Hydraulic data (Duty point)

Flow
Head
Shaft power P2
Hydraulic efficiency
NPSH

Product data

Glanded standard twin-head pump
DL 50/180-7,5/2
Max. operating pressure: 1,600 kPa
Fluid temperature: -20 °C ... +140 °C
Max. ambient temperature: 40 °C
Minimum efficiency index (MEI): ≥ 0.4

Motordata per Motor/Pump

Motor efficiency level: IE3
Mains connection: 3~ 400 V / 50 Hz
Permitted voltage tolerance: +10 %
Rated speed: 2,900 1/min
Rated power P2: 7.50 kW
Rated current: 14.65 A
Power factor: 0.9
Efficiency: 50% / 75% / 100% → 88.9/90.3/90.1%
Degree of protection: IP55
Insulation class: F
Motor protection: PTC integrated

Fitting dimensions

Pipe connection on the suction side: DN 50, PN 16
Pipe connection (pressure side): DN 50, PN 16
Port to Port: 440 mm

Materials

Pump housing: 5.1301/EN-GJL-250
Impeller: EN-GJL-200
Lantern: 5.1301/EN-GJL-250
Shaft: 1.4122
Shaft seal: AQ1EGG

Information for order placements

Weight approx.: 209 kg
Item number: 2121030

