

Customer


Technical data

High-pressure multistage centrifugal pump Helix FIRST V 2216-5/30/E/KS/400-50

Project ID: Untitled project 2025-03-03 15:12:38.853

Project name
Installation location
Customer pos. No.

Date: 2025-03-03

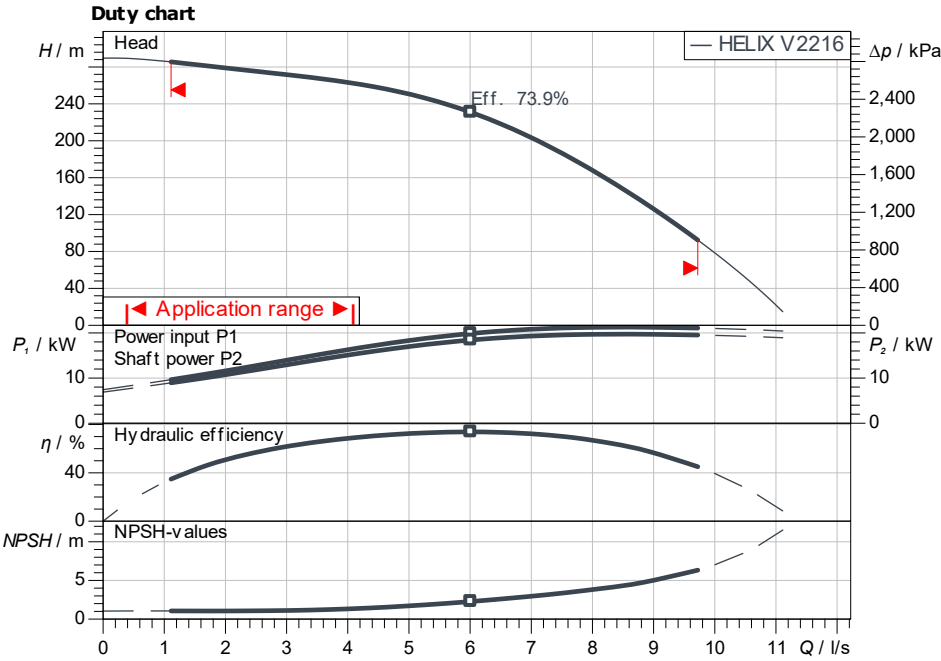

Requested data

Flow
Head
Media: Water 100 %
Fluid temperature: 20.00 °C
Density: 998.30 kg/m³
Kin. viscosity: 1.00 mm²/s

Hydraulic data (Duty point)

Flow
Head
Shaft power P_2
Hydraulic efficiency
NPSH

Product data

High-pressure multistage centrifugal pump
Helix FIRST V 2216-5/30/E/KS/400-50
Max. operating pressure: 3,000 kPa
Inlet pressure max.: 10 bar
Fluid temperature: -20 °C ... +120 °C
Max. ambient temperature: 50 °C
Minimum efficiency index (MEI): ≥ 0.7

Motordata per Motor/Pump

Motor efficiency level: IE3
Mains connection: 3~ 400 V / 50 Hz
Permitted voltage tolerance: +10 %
Max. speed: 2,940 1/min
Rated power P_2 : 22.00 kW
Rated current: 39.10 A
Power factor: 0.87
Service factor: 1.15
Efficiency: 50% / 75% / 100% → 92.7/92.7/92.7%
Degree of protection: IP55
Insulation class: F
Motor protection: No

Fitting dimensions

Pipe connection on the suction side: DN 50, PN 40
Pipe connection (pressure side): DN 50, PN 40

Materials

Pump housing: 5.1301/EN-GJL-250
Impeller: 1.4307
Shaft: 1.4057
Shaft seal: Q1BE3GG
Gasket material: EPDM

Information for order placements

Weight approx.: 198 kg
Item number: 4200636

ISO 9906: 2012 3B

Dimensions

| | |
|----|------|
| H | 1,81 |
| H2 | 1,33 |
| ØM | 305 |
| X | 218 |
| X | 200 |

mm

