


Operating data

Rotational speed	Frequency	Duty point	H =	Suction port	Discharge port
2966 1/min	50 Hz	Q =		DN 80	DN 65

Power data referred to: Water; 20°C; 998.3kg/m³; 1.005mm²/s ±10 % tolerance with linear U/f frequency control

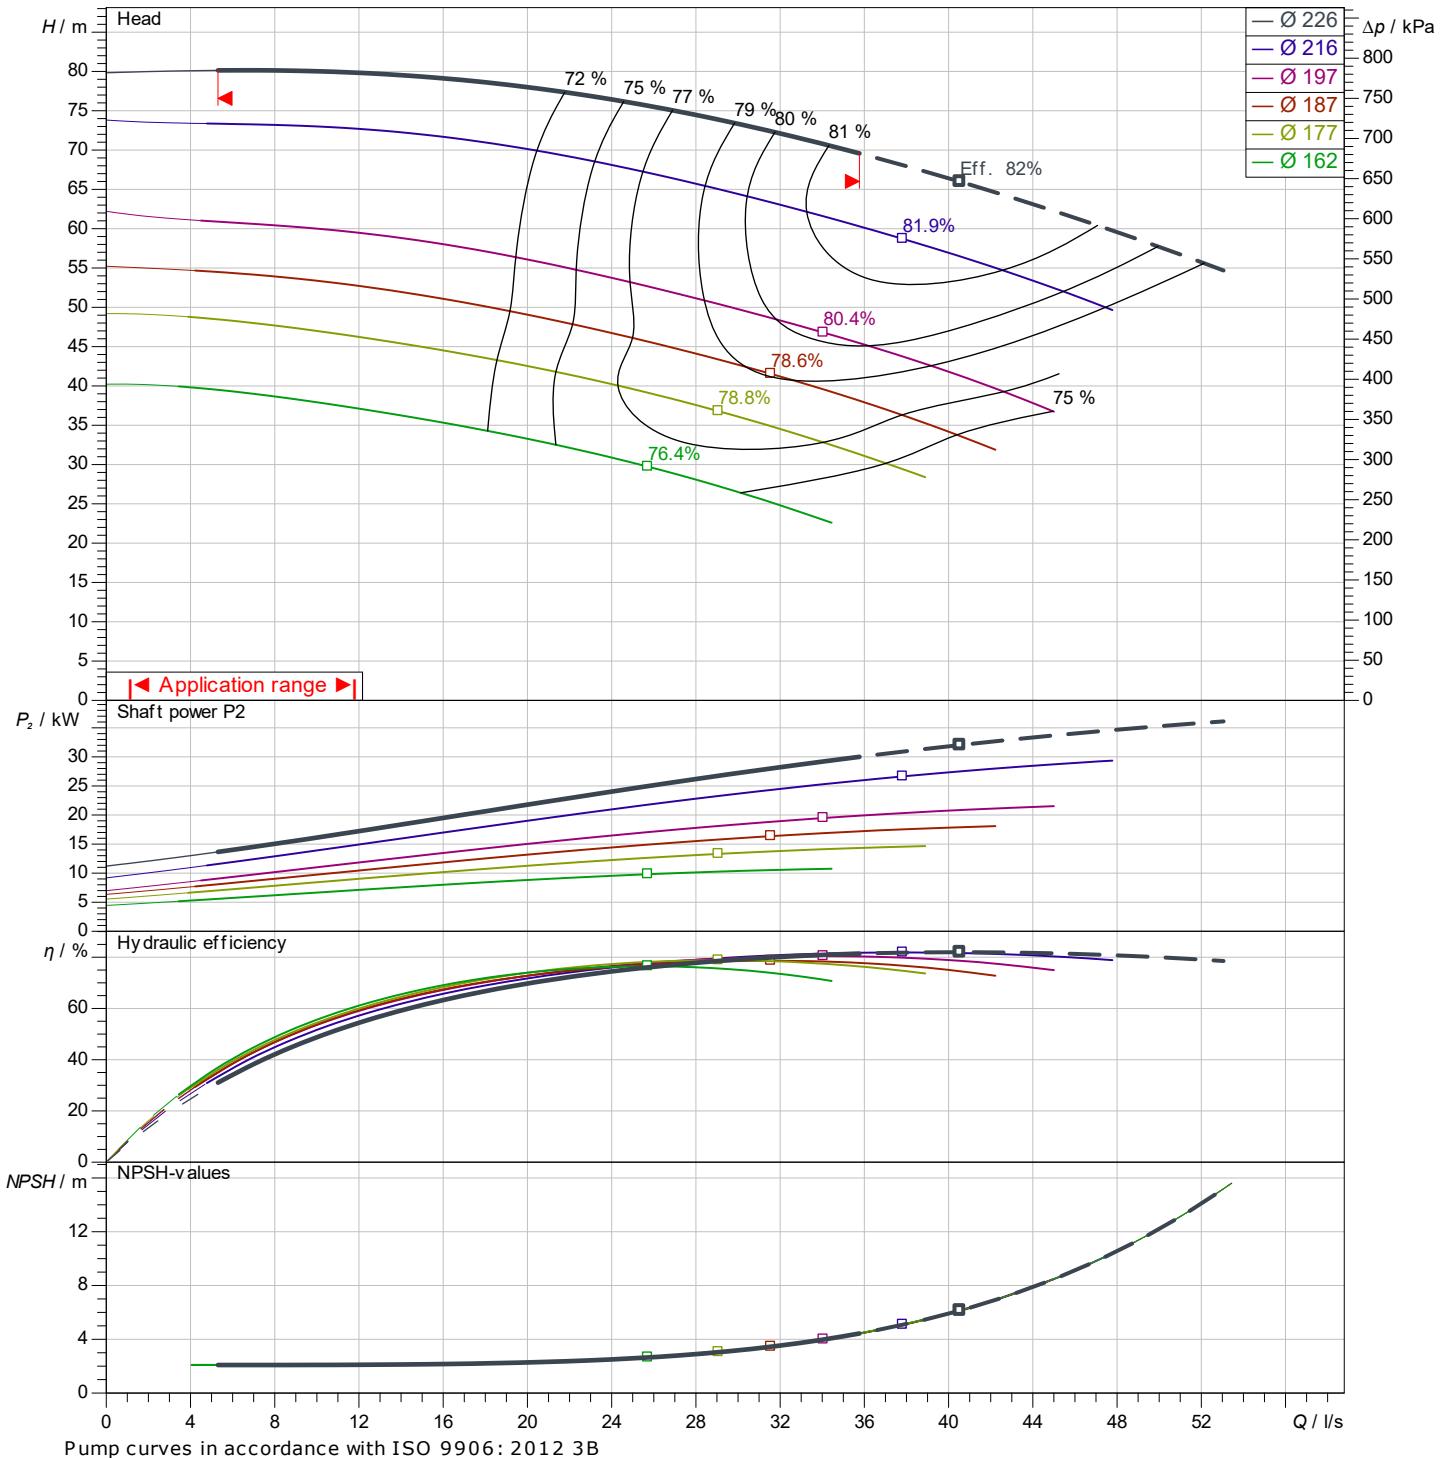

Pump curves in accordance with ISO 9906: 2012 3B



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Glanded standard pump
Atmos GIGA-NHT 65/200-30/2-S2

Project ID Untitled project 2025-03-01 20:45:47.557

Project name
Installation location
Customer pos. No.

Date 2025-03-01

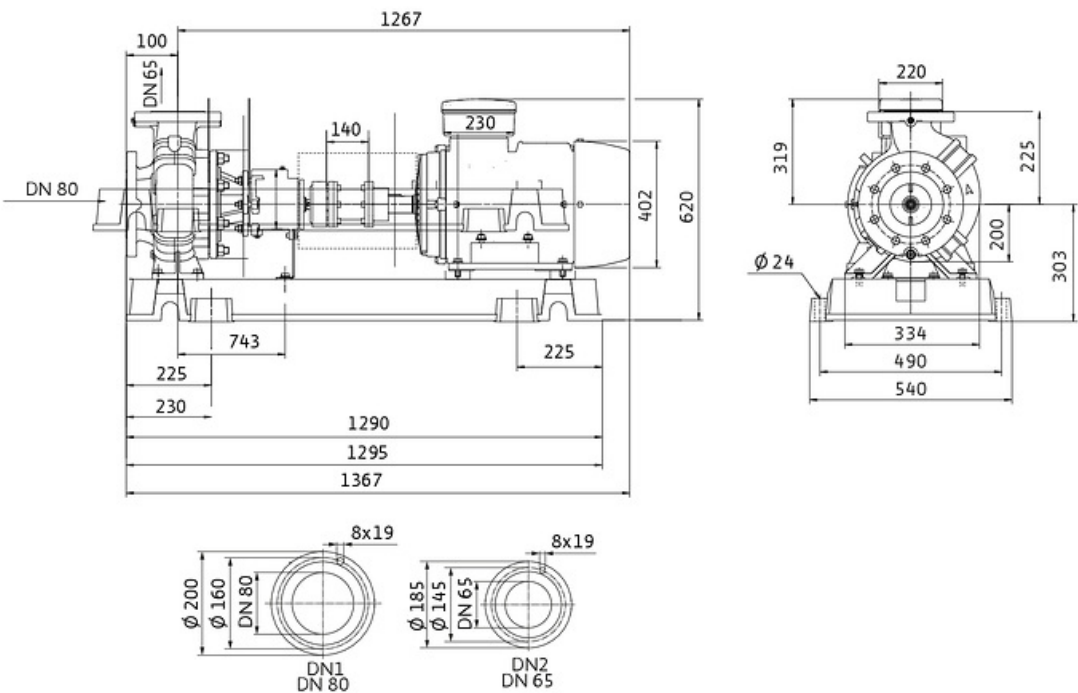

Standard

Suction side DN 80, PN 25
Discharge side DN 65, PN 25

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
------	-------	------	-------	------	-------	------	-------