

**Customer**

## Technical data


### High-pressure multistage centrifugal pump Helix V 3611/2-2/30/V/KS/400-50

Project ID: Untitled project 2025-03-03 20:19:56.538

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-03

#### Duty chart

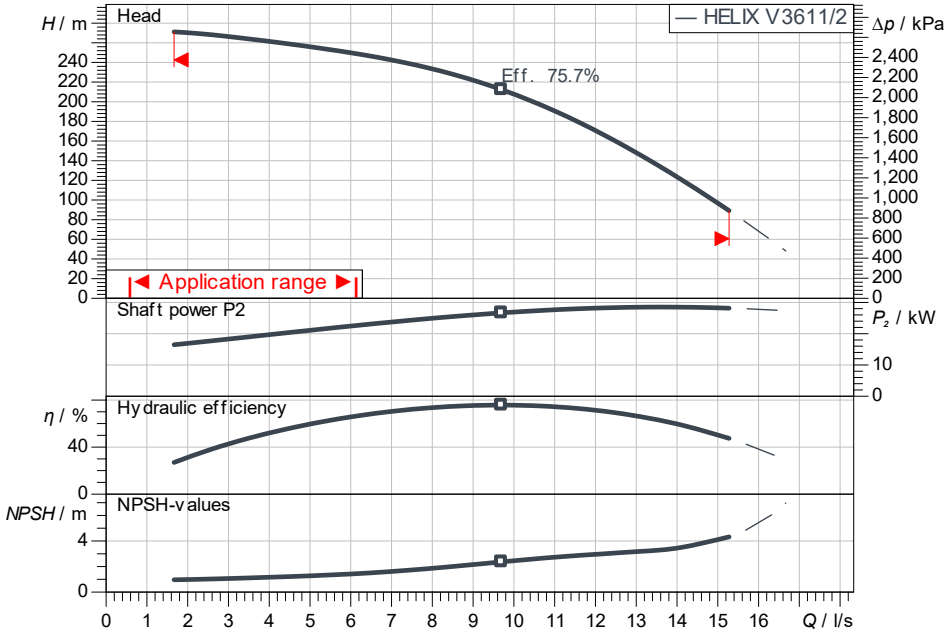

#### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

#### Hydraulic data (Duty point)

Flow	
Head	
Shaft power P <sub>2</sub>	
Hydraulic efficiency	
NPSH	

#### Product data

High-pressure multistage centrifugal pump Helix V 3611/2-2/30/V/KS/400-50	
Max. operating pressure	3,000 kPa
Inlet pressure max.	10 bar
Fluid temperature	-15 °C ... +90 °C
Max. ambient temperature	50 °C
Minimum efficiency index (MEI)	≥ 0.7

#### Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Max. speed	2,900 1/min
Rated power P <sub>2</sub>	30.00 kW
Rated current	50.80 A
Power factor	0.91
Service factor	1.15
Efficiency	50% / 75% / 100%
	92.1/93.2/93.3%
Degree of protection	IP55
Insulation class	F
Motor protection	No

#### Fitting dimensions

Pipe connection on the suction side	DN 65, PN 40
Pipe connection (pressure side)	DN 65, PN 40

#### Materials

Pump housing	1.4409
Impeller	1.4404
Shaft	1.4404
Shaft seal	Q1BVGG
Gasket material	FKM

#### Information for order placements

Weight approx.	281 kg
Item number	4165835

ISO 9906: 2012 3B

#### Dimensions

H	1,94
H2	1,34
ØM	347
X	255
X	261

mm

