

Technical data

Multi-pump system

COR-3 Helix V 1007/K/CC-01

Project ID

Untitled project 2025-03-02 07:54:47.232


Project name

Installation location

Customer pos. No.

Date 2025-03-02

Duty chart

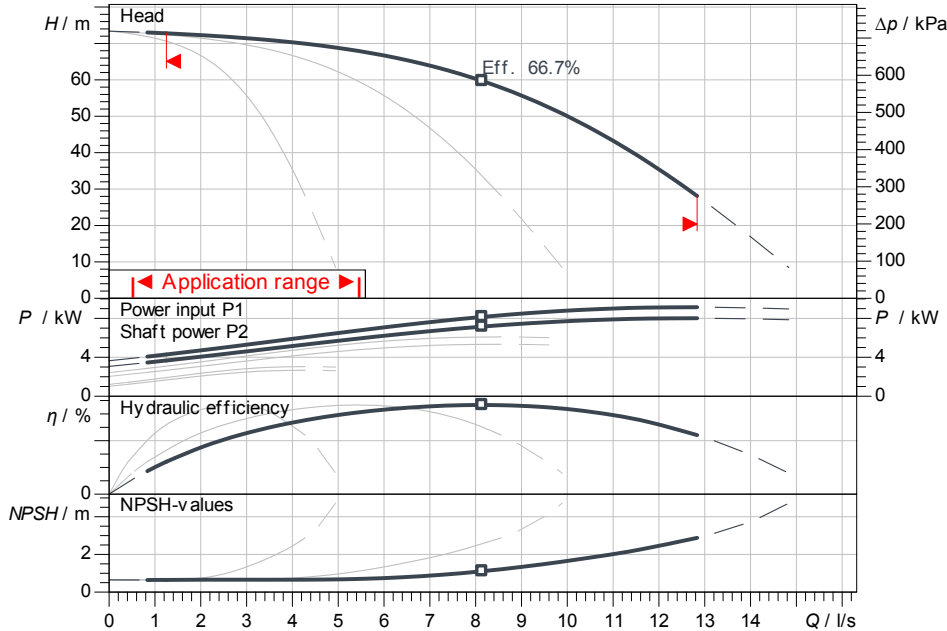

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	

Product data

Multi-pump system	
COR-3 Helix V 1007/K/CC-01	
Control	With frequency converter
No. of pumps	3
Max. operating pressure	1,600 kPa
Inlet pressure max.	1,000 kPa
Fluid temperature	3 °C ... +50 °C
Max. ambient temperature	40 °C
Protection class motor	IP55
Protection class of switchgear	IP54
Diaphragm pressure vessel	Yes
Low-water cut-out switchgear	No

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Rated speed	2,900 1/min
Rated power P2	3.00 kW
Rated current	5.50 A
Power factor	0.9
Efficiency	85.4/87.1/87.1 %
50% / 75% / 100%	
Insulation class	F
Motor protection	Yes

Fitting dimensions


Pipe connection on the suction side	R 2½, PN 10
Pipe connection (pressure side)	R 2½, PN 16

Materials

Pump housing	1.4301
Impeller	1.4307
Shaft	1.4301
Shaft seal	Q1BE3GG
Gasket material	EPDM
Pipework material	1.4404

Information for order placements

Weight approx.	274 kg
Item number	2534179

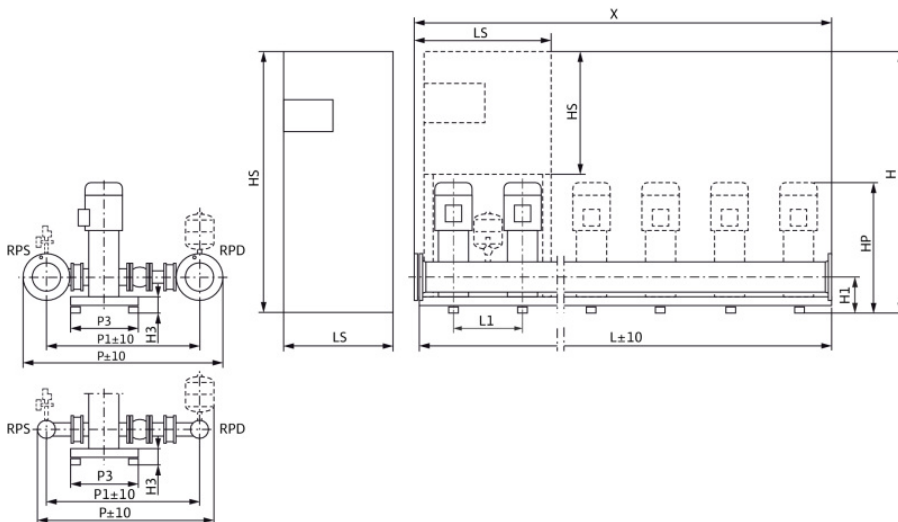

Dimensions

mm

DNd	R 2½, PN 16	HP	1,022	P	895
DNs	R 2½, PN 10	HS	760	P1	754
H	1,685	L	1,500	P3	470
H1	185	L1	300	P4	25
H3	105	LS	600	X	900

Dimensions

Multi-pump system

COR-3 Helix V 1007/K/CC-01

Project ID


Untitled project 2025-03-02 07:54:47.232

Project name

Installation location

Customer pos. No.

Date 2025-03-02

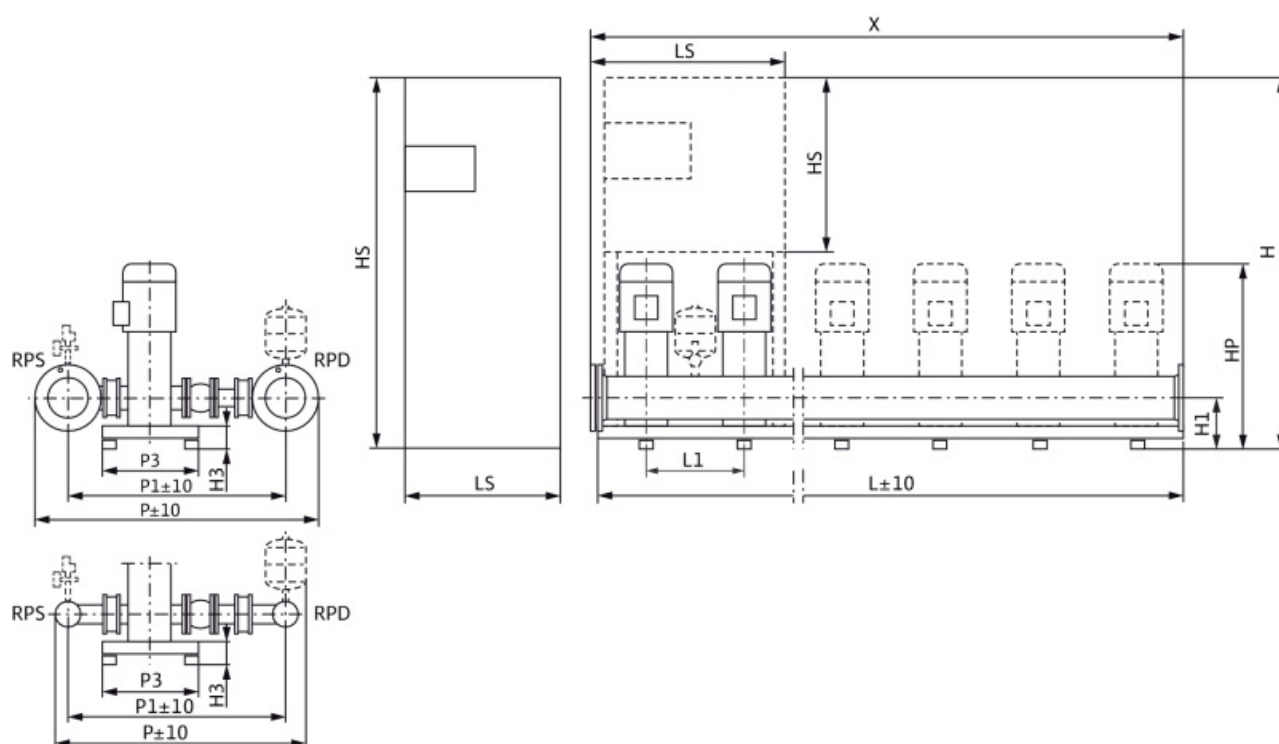

Standard

Suction side R 2½, PN 10/PN 16

Discharge side R 2½, PN 10/PN 16

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
DNd	R 2½, PN 16	L	1,500	X	900		
DNs	R 2½, PN 10	L1	300				
H	1,685	LS	600				
H1	185	P	895				
H3	105	P1	754				
HP	1,022	P3	470				
HS	760	P4	25				