

Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Technical data

Automatic condensate lifting unit Plavis 013-C-2G/GB

Project ID Untitled project 2025-03-17 06:01:16.364

Project name
Installation location
Customer pos. No.

Date 2025-03-17

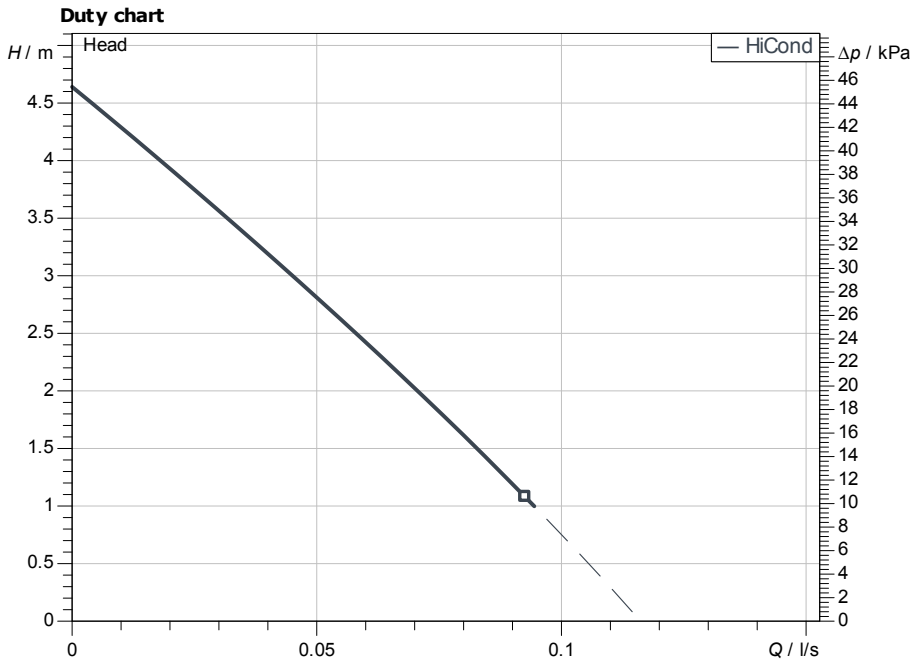

Requested data

Flow	
Head	
Media	Water 100 %
Fluid to be pumped	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow
Head

Product data

Automatic condensate lifting unit	
Plavis 013-C-2G/GB	
Max. operating pressure	50 kPa
Fluid temperature	5 °C ... +60 °C
Operating mode (non-immersed)	S3-50%
Gross volume	1.1 l

Motordata per Motor/Pump

Mains connection	1~ 240 V / 50 Hz
Permitted voltage tolerance	+5 %
Power input P1	0.02 kW
Rated current	0.20 A
Activation type	-
Degree of protection	IP20
Insulation class	B

Cable

Length of connecting cable	1.5 m
Mains plug	
Type of connecting cable	

Fitting dimensions

Inlet connection	Ø 18-40mm, -
Pipe connection (pressure side)	Ø 8-10mm, -

Materials

Tank	ABS
Pump housing	ABS
Impeller	POM
Motor housing	ABS

Information for order placements

Weight approx.	0.8 kg
Item number	2548595

