

Technical data

Glanded standard single pump Atmos GIGA-I 200/390-75/4-P6

Project ID

Untitled project 2025-03-01 19:22:28.264


Project name

Installation location

Customer pos. No.

Date 2025-03-01

Duty chart

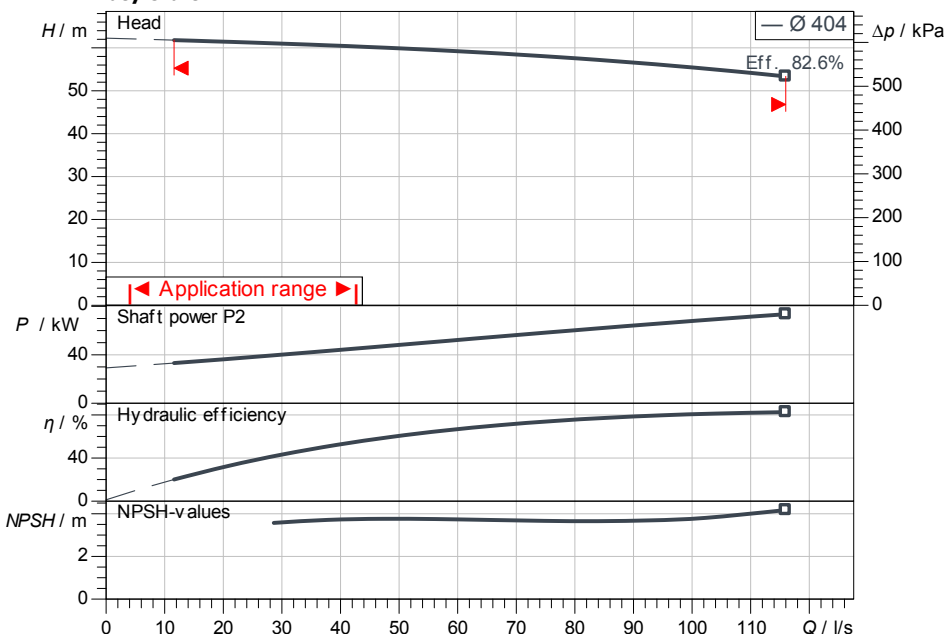

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P_2	
Hydraulic efficiency	
NPSH	

Product data

Glanded standard single pump	
Atmos GIGA-I 200/390-75/4-P6	
Max. operating pressure	1,600 kPa
Fluid temperature	-20 °C ... +140 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE4
Mains connection	3~400 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Rated speed	1,450 1/min
Rated power P_2	75.00 kW
Rated current	139.00 A
Power factor	0.81
Efficiency	
50% / 75% / 100%	96/96.3/96.3%
Degree of protection	IP55
Insulation class	F
Motor protection	PTC integrated

Fitting dimensions

Pipe connection on the suction side	DN 200, PN 16
Pipe connection (pressure side)	DN 200, PN 16
Port to Port	1,100 mm

Materials

Pump housing	
5.1301, EN-GJL-250 cataphoretic-coated	
Impeller	EN-GJL-200
Lantern	5.1301, EN-GJL-250 cataphoretic-coated
Shaft	1.4122
Shaft seal	AQ1EGG

Information for order placements

Weight approx.	1150 kg
Item number	2227424

