

Contact  
E-mail  
Phone

**Customer**

Contact  
E-mail  
Phone

# Technical data







## Glandless premium smart twin-head pump Stratos MAXO-D 80/0,5-6 PN10

Project ID: Untitled project 2025-03-04 09:37:01.987

Project name  
Installation location  
Customer pos. No.

Date: 2025-03-04

**Duty chart**

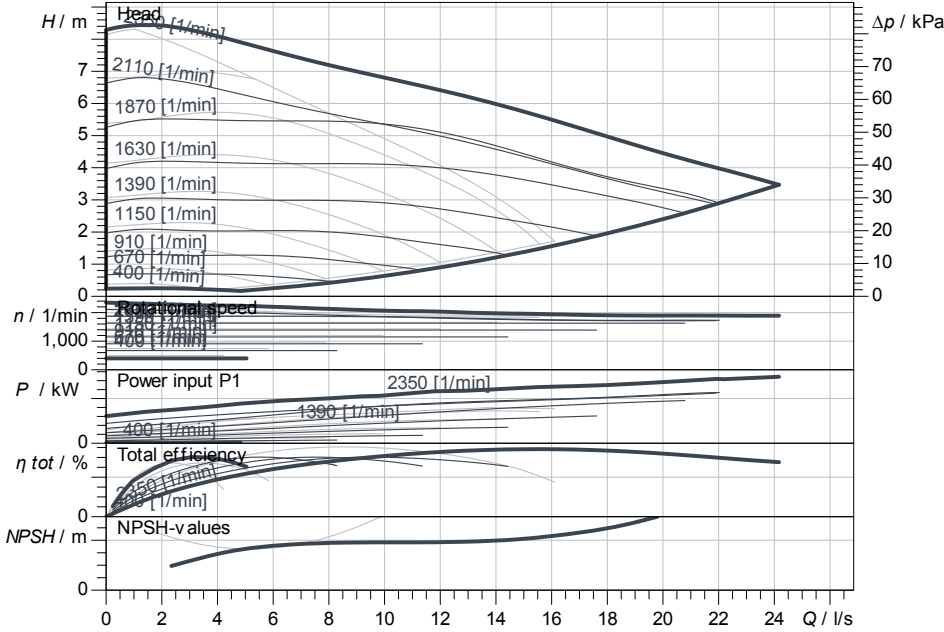

**Requested data**

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s

**Hydraulic data (Duty point)**

Flow
Head
Power input P1

**Product data**

Glandless premium smart twin-head pump	
Stratos MAXO-D 80/0,5-6 PN10	
Kind of operation	n-const ADD
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +110 °C
Max. ambient temperature	40 °C
Minimum suction head at 50 / 95 / 110 °C	7 / 15 / 23

**Motordata per Motor/Pump**

Motor design	EC motor
Energy efficiency index (EEI)	≤ 0.18
Mains connection	1~ 230 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Max. speed	2,350 1/min
Power input P1	0.85 kW
Current consumption	3.71 A
Degree of protection	IPX4D
Insulation class	F
Motor protection	Internal protection over
Electromagnetic compatibility	
Emitted interference	EN 61800-3;2004+A1
Interference resistance	EN 61800-3;2004+A1
Threaded cable connection	5 x M16x1.5

**Fitting dimensions**

Pipe connection on the suction side	DN 80, PN 10
Pipe connection (pressure side)	DN 80, PN 10
Port to Port	360 mm

**Materials**

Pump housing	5.1301/EN-GJL-250
Impeller	PPS-GF40
Shaft	1.4028
Bearing	Carbon, antimony-impregnated

**Information for order placements**

Weight approx.	63 kg
Item number	2164661

