



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Glanded monobloc pump
BM-B 50/210-12,5/2

Project ID Untitled project 2025-03-01 21:27:50.947

Project name
Installation location
Customer pos. No.

Date 2025-03-01

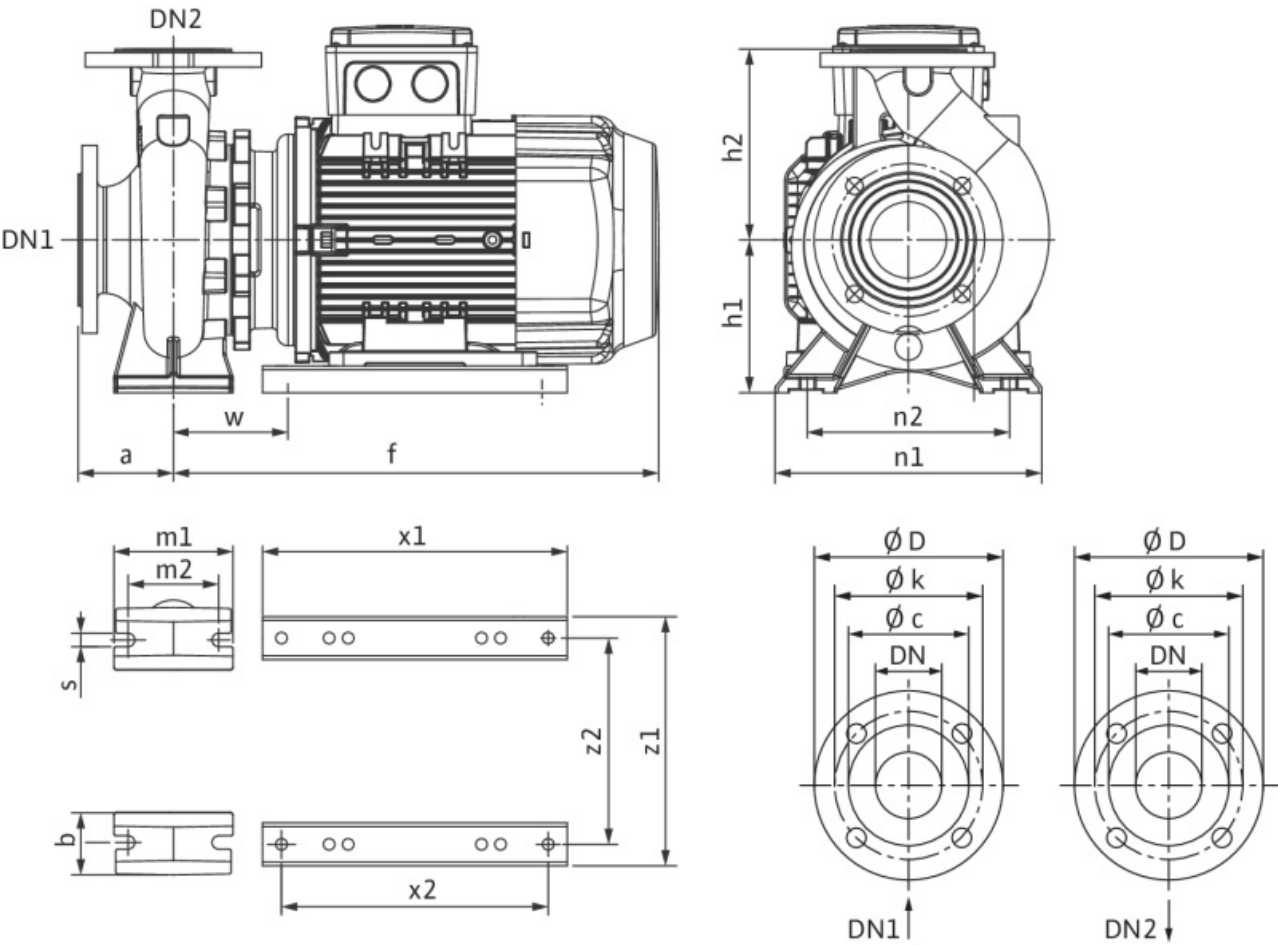

Standard

Suction side DN 65, PN 10
Discharge side DN 50, PN 10

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
a	100	h1	160	Ø k	125	x2	280
b	50	h2	200	Ø d	118	z1	261
d	12	m1	100	Ø D	185	z2	216
dL	19	m2	70	Ø D	165		
DN1	DN 65, PN 10	n1	265	s	14		
DN2	DN 50, PN 10	n2	212	w	113		
f	564	Ø k	145	x1	320		

Technical data

Glanded monobloc pump BM-B 50/210-12,5/2

Project ID

Untitled project 2025-03-01 21:27:50.947



Project name

Installation location

Customer pos. No.

Date 2025-03-01

Duty chart

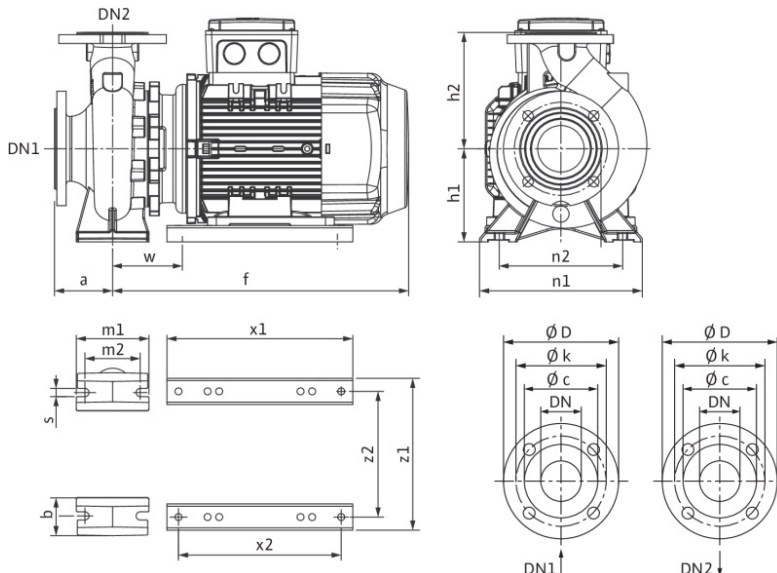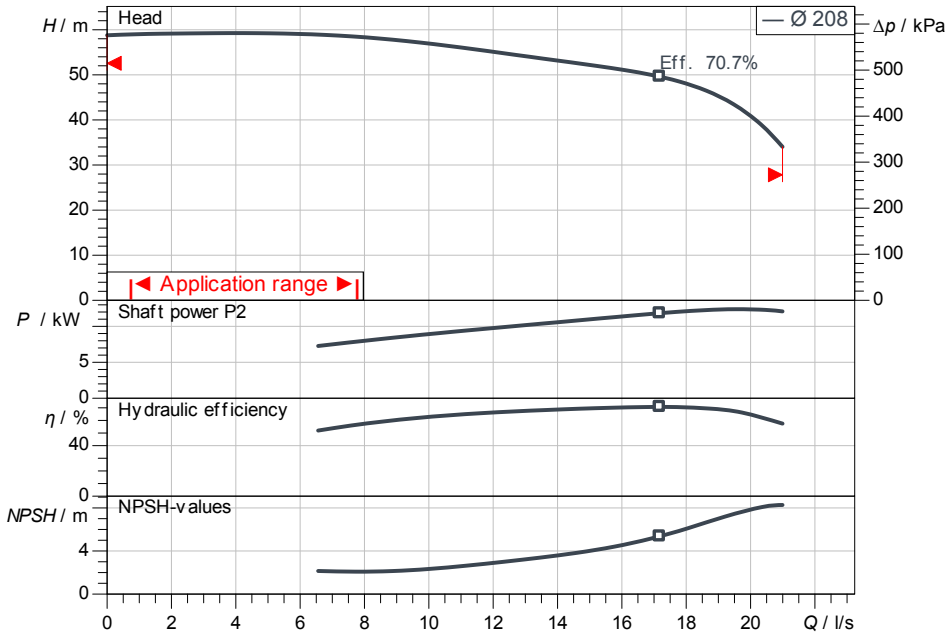

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m³
Kin. viscosity	1.00 mm²/s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

Product data

Glanded monobloc pump	
BM-B 50/210-12,5/2	
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +90 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Rated speed	2,900 1/min
Rated power P2	12.50 kW
Rated current	22.70 A
Power factor	0.88
Efficiency	
50% / 75% / 100%	91.1/ 91.9/ 91.4%
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions

Pipe connection on the suction side	DN 65, PN 10
Pipe connection (pressure side)	DN 50, PN 10
Port to Port	-

Materials

Pump housing	Bronze, G-CuSn10
Impeller	Bronze, G-CuSn10
Shaft	1.4362
Shaft seal	Q1Q1VGG

Information for order placements

Weight approx.	110 kg
Item number	2164390

Hydraulic data

Glanded monobloc pump

BM-B 50/210-12,5/2

Project ID

Untitled project 2025-03-01 21:27:50.947

Project name

Installation location

Customer pos. No.

Date 2025-03-01

Operating data

Rotational speed 2900 1/min	Frequency 50 Hz	Duty point Q =	H =	Suction port DN 65	Discharge port DN 50
---------------------------------------	---------------------------	--------------------------	------------	------------------------------	--------------------------------

