



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Glanded monobloc pump
BM-S 40/275-37/2

Project ID Untitled project 2025-03-01 21:27:50.947

Project name
Installation location
Customer pos. No.

Date 2025-03-01

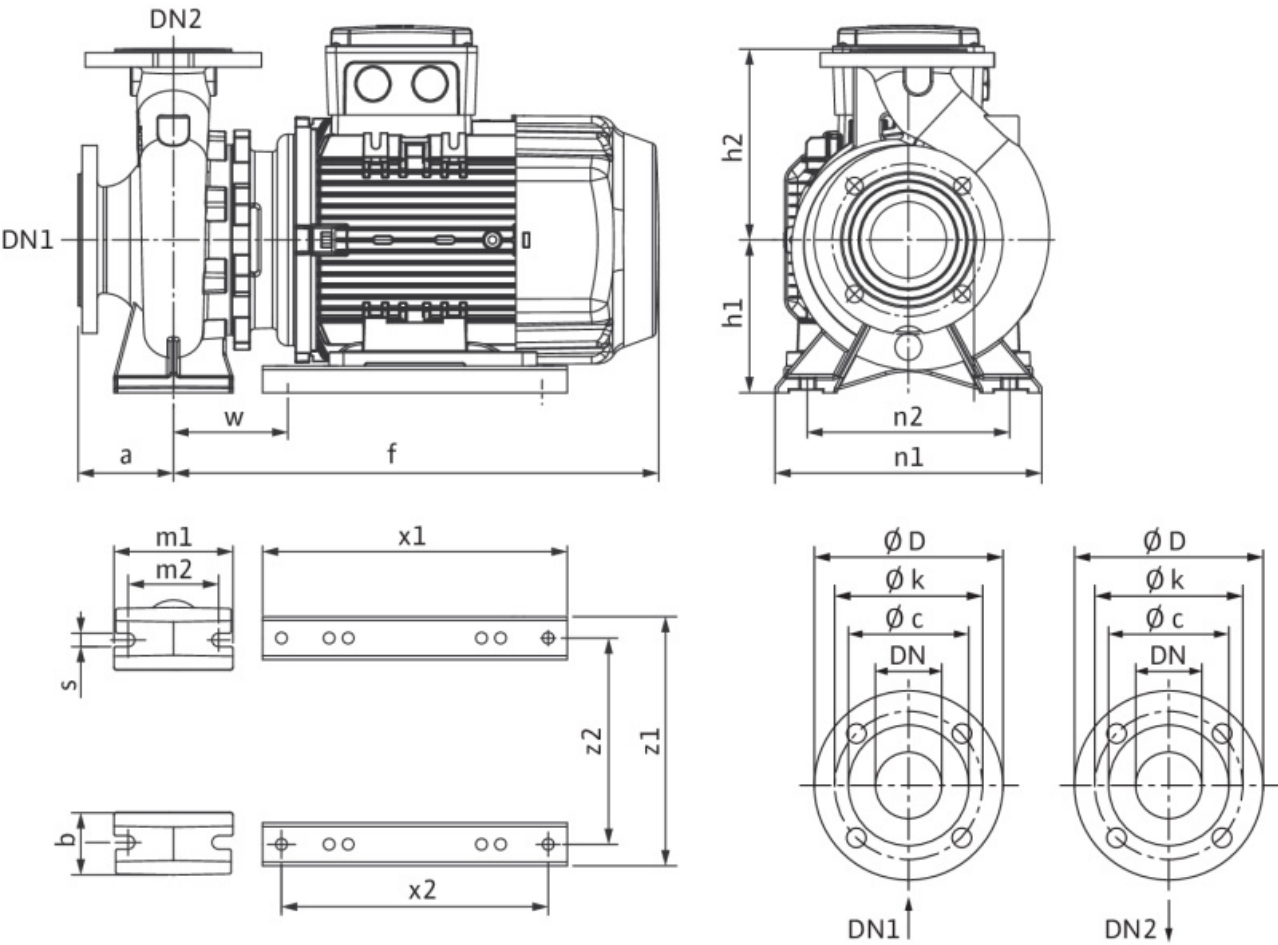

Standard

Suction side DN 65, PN 10
Discharge side DN 40, PN 10

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
a	125	h1	225	Ø k	110	z1	390
b	65	h2	250	Ø D	185	z2	318
d	18	m1	125	Ø D	150		
dL	18	m2	95	s	14		
DN1	DN 65, PN 10	n1	345	w	236		
DN2	DN 40, PN 10	n2	280	x1	480		
f	787	Ø k	145	x2	423		

Technical data

Glanded monobloc pump BM-S 40/275-37/2

Project ID

Untitled project 2025-03-01 21:27:50.947



Project name

Installation location

Customer pos. No.

Date 2025-03-01

Duty chart

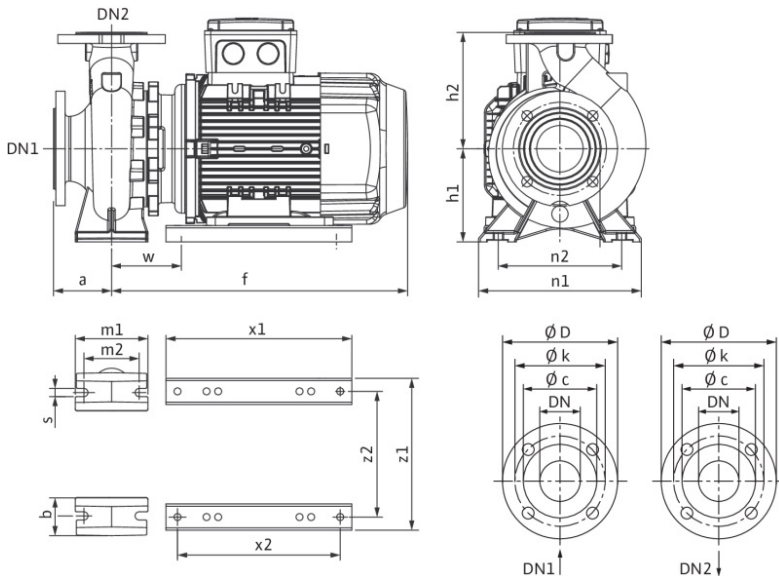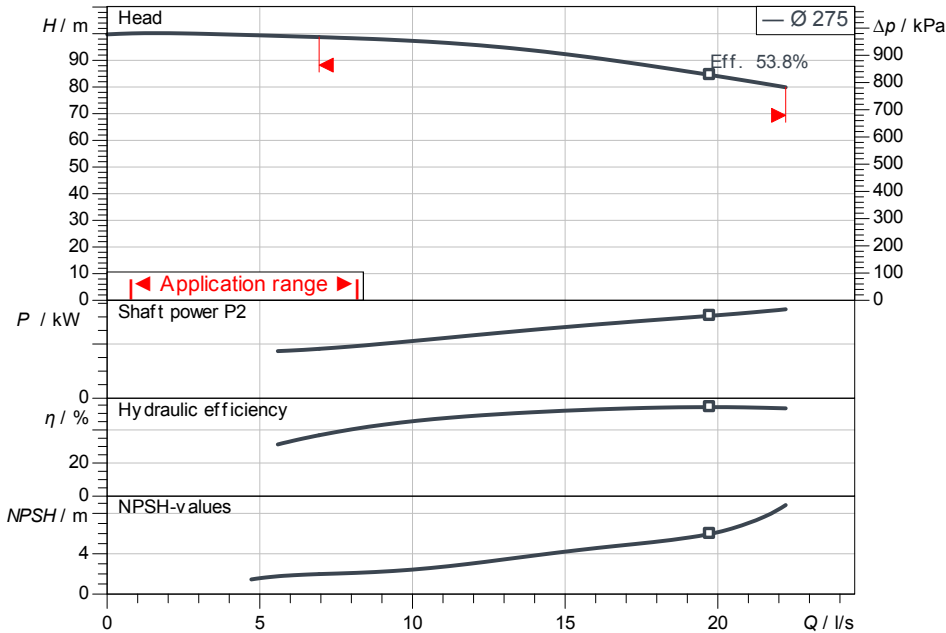

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
NPSH	

Product data

Glanded monobloc pump	
BM-S 40/275-37/2	
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +90 °C
Max. ambient temperature	40 °C
Minimum efficiency index (MEI)	≥ 0.4

Motordata per Motor/Pump

Motor efficiency level	IE3
Mains connection	3~400 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Rated speed	2,900 1/min
Rated power P2	37.00 kW
Rated current	65.30 A
Power factor	0.87
Efficiency	
50% / 75% / 100%	94.1/ 94.3/93.7%
Degree of protection	IP55
Insulation class	F
Motor protection	No

Fitting dimensions

Pipe connection on the suction side	DN 65, PN 10
Pipe connection (pressure side)	DN 40, PN 10
Port to Port	-

Materials

Pump housing	1.4408
Impeller	1.4408
Shaft	1.4362
Shaft seal	Q1Q1VGG

Information for order placements

Weight approx.	220 kg
Item number	2196586

Hydraulic data

Glanded monobloc pump

BM-S 40/275-37/2

Project ID

Untitled project 2025-03-01 21:27:50.947

Project name


Installation location

Customer pos. No.

Date 2025-03-01

Operating data

Rotational speed	Frequency	Duty point		Suction port	Discharge port
2900 1/min	50 Hz	Q =	H =	DN 65	DN 40

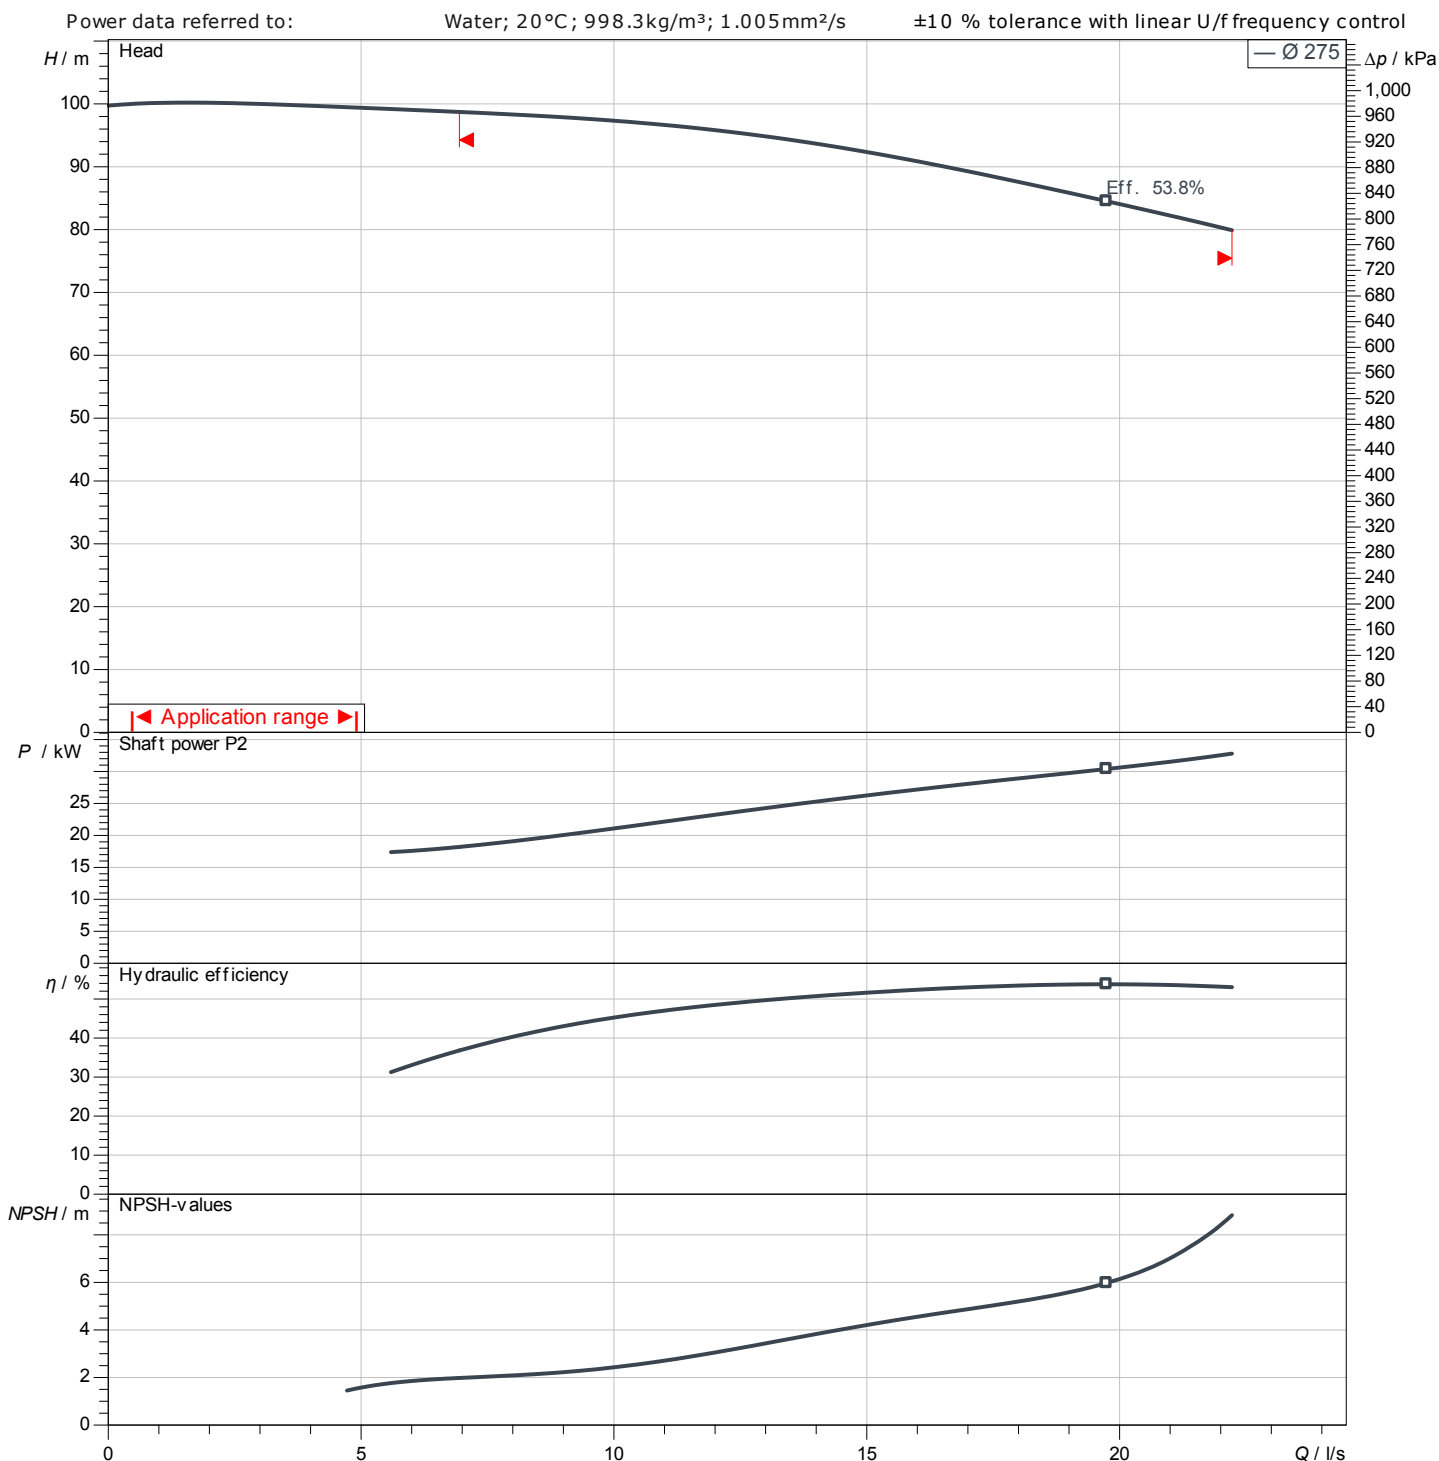

No test norm defined for this product