

**Customer**

## Technical data


### Glandless premium smart-pump Stratos MAXO 30/0,5-4 PN16

Project ID                      Untitled project 2025-03-04 09:37:01.987

Project name  
Installation location  
Customer pos. No.

Date                      2025-03-04

#### Duty chart

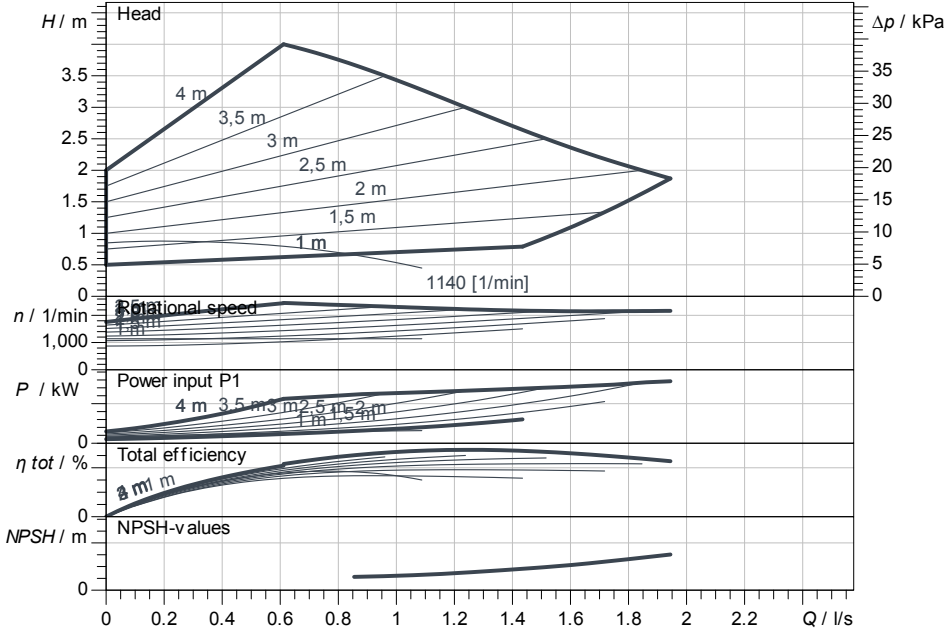

#### Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m <sup>3</sup>
Kin. viscosity	1.00 mm <sup>2</sup> /s
<b>Hydraulic data (Duty point)</b>	
Flow	
Head	
Power input P1	
<b>Product data</b>	
Glandless premium smart-pump	
Stratos MAXO 30/0,5-4 PN16	
Kind of operation	dp-v
Max. operating pressure	1,600 kPa
Fluid temperature	-10 °C ... +110 °C
Max. ambient temperature	40 °C

#### Motordata per Motor/Pump

Motor design	EC motor
Energy efficiency index (EEI)	≤ 0.18
Mains connection	1~ 230 V / 50 Hz
Permitted voltage tolerance	+ -10 %
Max. speed	2,550
Power input P1(max)	0.08 kW
Current consumption	0.58 A
Degree of protection	IPX4D
Insulation class	F
Emitted interference	EN 61800-3;2004+A1
Interference resistance	EN 61800-3;2004+A1
Threaded cable connection	

#### Fitting dimensions

Pipe connection on the suction side	G 2, PN 16
Pipe connection (pressure side)	G 2, PN 16
Port to Port	180 mm

#### Materials

Pump housing	EN-GJL-200
Impeller	PPS-GF40
Shaft	1.4122
Bearing	Carbon-graphite

#### Information for order placements

Weight approx.	7.2 kg
Item number	2186260

