

Technical data

Submersible sewage pump

Rexa MINI3-V04.09/M05-523/A-10M

Project ID


Untitled project 2025-03-17 06:32:17.222

Project name

Installation location

Customer pos. No.

Date 2025-03-17

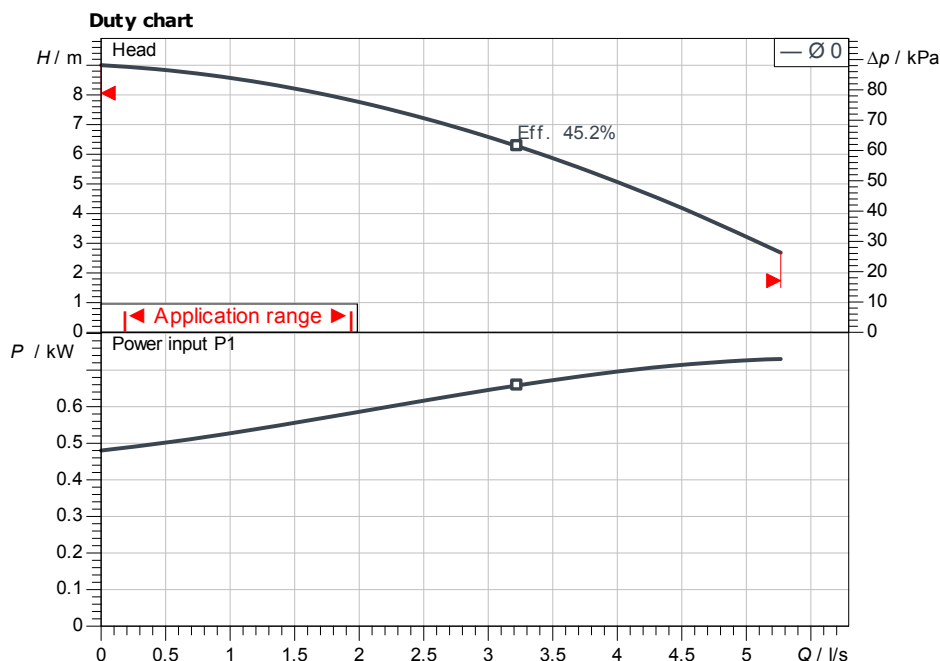

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow
Head
Power input P1
Total efficiency

Product data

Submersible sewage pump
Rexa MINI3-V04.09/M05-523/A-10M

Max. operating pressure	100 kPa
Fluid temperature	3 °C ... +40 °C
Maximum submergence depth	7 m
Free ball passage	40 mm
Impeller type	Vortex impeller
Float switch	Yes

Motordata per Motor/Pump

Type of motor	Submersible motor – su
---------------	------------------------

Mains connection	1~230 V / 50 Hz
Permitted voltage tolerance	+/-10 %
Nominal speed	2,900 1/min
Rated power P2	0.50 kW
Power input P1	0.73 kW
Rated current	3.30 A
Activation type	Direct On Line (DOL)
Degree of protection	IP68
Explosion protection type	-
Motor protection	Bimetall
Insulation class	F
Operating mode (immersed)	S1
Operating mode (non-immersed)	S3-20%

Cable

Length of connecting cable	10 m
Cable type	H07RN-F
Cable cross section	3G1
Mains plug	CEE 7/7 (Schuko)
Type of connection cable	Detachable

Fitting dimensions

Pipe connection on the suction side, -/PN 10
Pipe connection (pressure side) G 1½, -/PN 10

Materials

Pump housing	EN-GJL-200
Impeller	PK-GF30
Shaft	1.4301
Sealing on pump side	BXPFF
Sealing on motor side	NBR
Gasket material	NBR
Motor housing	1.4301

Information for order placements

Weight approx.	14 kg
Item number	3094009

