

Customer


Technical data

Submersible drainage pump KS 12D GG

Project ID: Untitled project 2025-03-03 12:32:55.181

Project name
Installation location
Customer pos. No.

Date: 2025-03-03

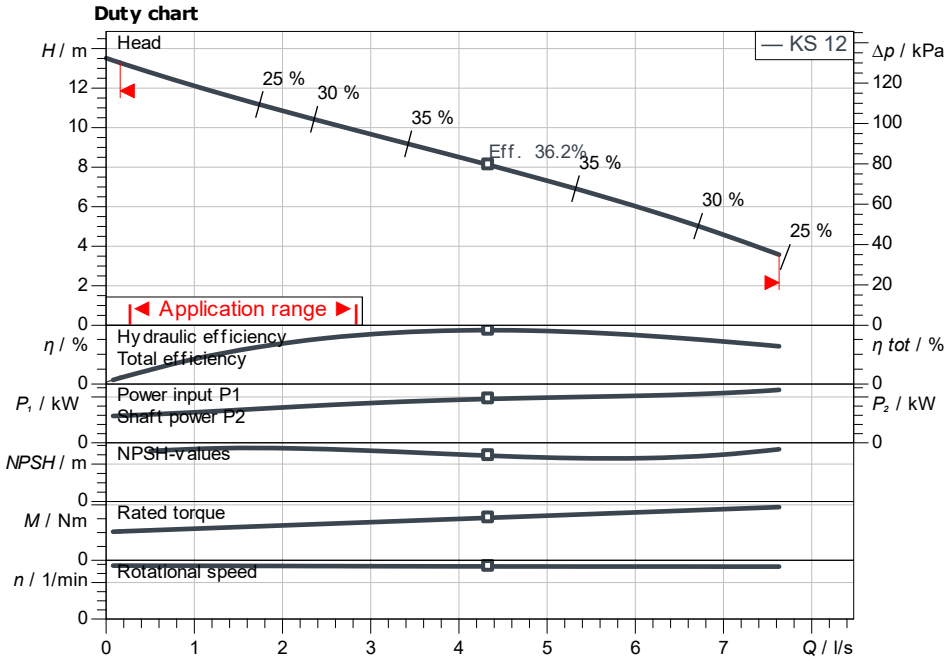

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m³
Kin. viscosity	1.00 mm²/s

Hydraulic data (Duty point)

Flow	
Head	
Power input P1	
Total efficiency	

Product data

Submersible drainage pump	
KS 12D GG	
Max. operating pressure	150 kPa
Fluid temperature	3 °C ... +40 °C
Maximum submergence depth	12.5 m
Free ball passage	40 mm
Max. fluid temp. for up to 3 min	

Motordata per Motor/Pump

Type of motor	Submersible motor – sel
Mains connection	3~ 400 V / 50 Hz
Permitted voltage tolerance	+10 %
Nominal speed	2,850 1/min
Rated power P2	1.30 kW
Power input P1	1.9 kW
Rated current	3.15 A
Activation type	Direct On Line (DOL)
Degree of protection	IP68
Float switch	No
Motor protection	No
Insulation class	F
Operating mode (immersed)	S1
Operating mode (non-immersed)	S1
Max. operating rate	15 1/h

Cable

Length of connecting cable	10 m
Cable type	H07RN-F
Cable cross section	4G1,5
Type of connecting cable	Detachable
Mains plug	CEE M16W (3P+N+PE,

Fitting dimensions

Pipe connection on the suction side,	
Pipe connection (pressure side)	Storz C,

Materials

Pump housing	5.1301/EN-GJL-250
Impeller	5.1301/EN-GJL-250
Shaft	1.4021
Sealing on pump side	QQPPGG
Sealing on motor side	BVPPGG
Gasket material	FKM
Motor housing	5.1301/EN-GJL-250

Information for order placements

Weight approx.	27 kg
Item number	6042087

