

Customer


Technical data

Glandless standard high-efficiency pump Yonos PICO 25/1-5-130

Project ID Untitled project 2025-03-04 09:37:01.987

Project name
Installation location
Customer pos. No.

Date 2025-03-04

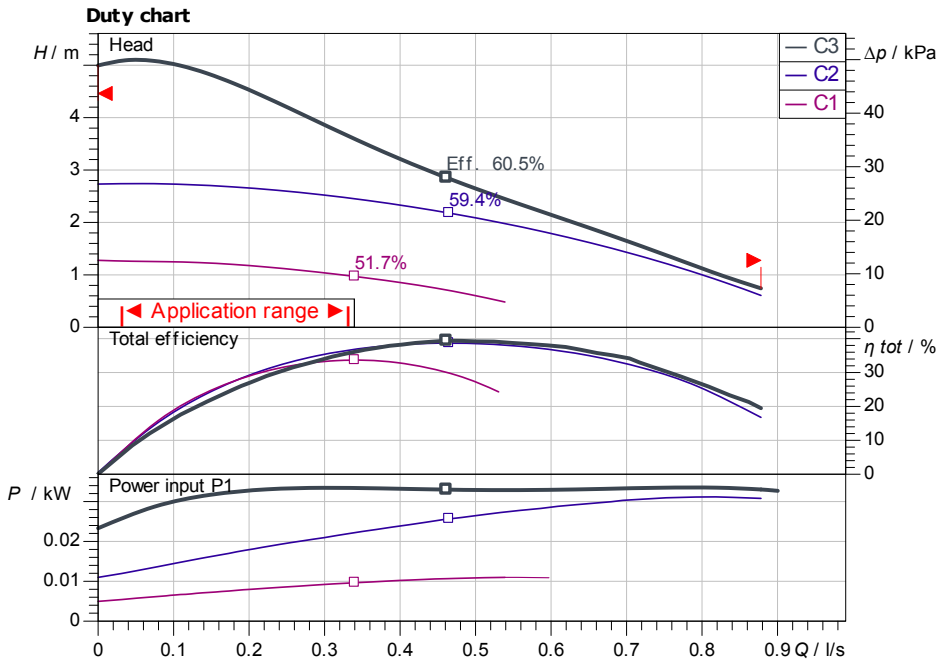

Requested data

Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m ³
Kin. viscosity	1.00 mm ² /s

Hydraulic data (Duty point)

Flow	
Head	
Power input P1	

Product data

Glandless standard high-efficiency pump	
Yonos PICO 25/1-5-130	
Kind of operation	n-const
Max. operating pressure	1,000 kPa
Fluid temperature	-10 °C ... +95 °C
Max. ambient temperature	40 °C
Minimum suction head at 50 / 95 / 110 °C	0.5 / 3 / 10

Motordata per Motor/Pump

Motor design	EC motor
Energy efficiency index (EEI)	≤ 0.2
Mains connection	1~ 230 V / 50 Hz
Permitted voltage tolerance	+/- 10 %
Max. speed	3,800 1/min
Power input P1	0.03 kW
Current consumption	0.36 A
Degree of protection	IPX4D
Insulation class	F
Motor protection	integrated
Electromagnetic compatibility	EN 61800-3
Emitted interference	EN 61000-6-3
Interference resistance	EN 61000-6-2
Threaded cable connection	1 x PG11

Fitting dimensions

Pipe connection on the suction side	G 1 1/2, PN 10
Pipe connection (pressure side)	G 1 1/2, PN 10
Port to Port	130 mm

Materials

Pump housing	EN-GJL-200
Impeller	PP-GF40
Shaft	1.4122
Bearing	Carbon, metal-impregnated

Information for order placements

Weight approx.	1.7 kg
Item number	4215522

