


Technical data Submersible pump Sub TWU 3-0123-DM

Project ID Untitled project 2025-03-30 21:50:34.688

Project name
Installation location
Customer pos. No.

Date 2025-03-30

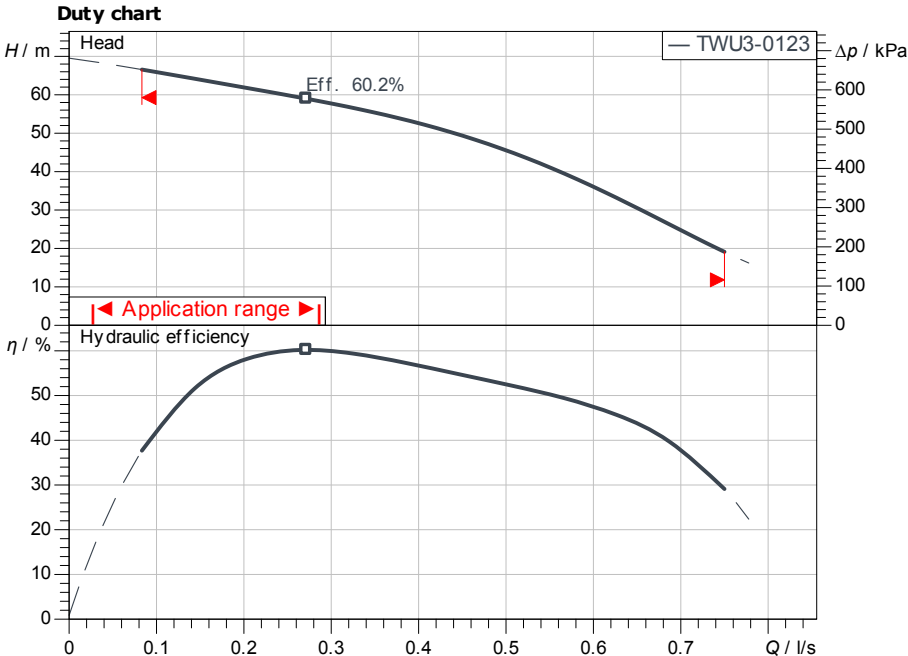

Requested data	
Flow	
Head	
Media	Water 100 %
Fluid temperature	20.00 °C
Density	998.30 kg/m³
Kin. viscosity	1.00 mm²/s
Hydraulic data (Duty point)	
Flow	
Head	
Shaft power P2	
Hydraulic efficiency	
Power input P1	
Product data	
Submersible pump	
Sub TWU 3-0123-DM	
Max. operating pressure	740 kPa
Fluid temperature	3 °C ... +35 °C
Minimum efficiency index (MEI)	-
Max. pump diameter	
Motordata per Motor/Pump	
Mains connection	3~400 V / 50 Hz
Type of motor	Submersible motor
Activation type	Direct On Line (DOL)
Min. flow at the motor	0.08 m/s
Motor diameter	72 mm
Permitted voltage tolerance	+/-10 %
Nominal speed	2,800 1/min
Rated power P2	0.55 kW
Rated current	2.50 A
Power factor	
Degree of protection	IP58
Insulation class	F
Cable	
Length of connecting cable	1.75 m
Cable type	4G1,5
Fitting dimensions	
Discharge size	Rp 1
Flange standard	-
Materials	
Pump housing	1.4301
Motor housing	1.4301
Shaft	1.4104
Impeller	PC
Information for order placements	
Weight approx.	10.5 kg
Item number	4090893

Approval

Dimensions mm