



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone

Technical data

Rexa PRO V06 DA-62
With motor
P 13.L-16/EAD0X4-T

Project ID Untitled project 2025-03-30 20:51:59.472
Project name
Installation location
Customer pos. No.

Date 2025-03-30

Pump

Pump type	Rexa PRO V06 DA-62
Installation type	Suspension device DN65 DN65/2RK
Free passage	65 mm
Nominal speed	1450
Frequency	50 Hz
Impeller type	Vortex impeller
Impeller construction	Open

Impeller Ø

designed	190 mm
standard	190 mm
Max.	190 mm
Min.	120 mm

Discharge port

Pressure rating	PN10
Rated diameter	DN65, DN80, Size 2.5, Size 3, cut-off 100 mm
Standard	WILO-D

Suction port

Pressure rating	PN10
Rated diameter	DN65
Standard	WILO-S

Weights

Weight	max.	20.1 kg
Weight of motor		44 kg
Weight of unit	max.	64.1 kg

Materials

Pump housing	EN-GJL-250
Impeller	EN-GJL-250
Motor housing	EN-GJL-250

Motor

Motor name	P 13.L-16/EAD0X4-T
Number of poles	4
Rated power	3.45 kW
Rated speed	1393 1/min
Power input with rated power	4.4 kW
Rated voltage	400 ~3 V
Current input with rated power	8.1 A
Efficiency with rated power	77.6 %
cos phi with rated power	0.8
cos phi with starting	
Rated frequency	50 Hz
Operation type wet	S1
Operation type dry	S2-30 min, S3-25%
Starting current, direct starting	52 A
Starting current, star-delta	17.3 A
Starting torque	67 Nm
Inertia moment	0.0042 kg m²
Degree of protection	IP 68
Sel. explosion protection	ATEX
Ex-designation	
Ex-number	
Motor connection cable	7G1,5 H07RN-F
Max. fluid temperature	40 °C
Starts per hour max.	60

Duty point data

Volume flow	
Head	
Shaft power P2	
Hydr. efficiency η hyd.	
Power input P1	
Fluid	Water
Required pump NPSH	
Rotational speed	1,447 1/min
Max. flow	20.5 l/s
Head H(Q max)	4 m
Shut off head	12.2 m
Best efficiency point Q (BEP)	11.7 l/s
Best efficiency point H (BEP)	8.7 m

Total efficiency = $\frac{P_2 * \text{Hydr. efficiency } \eta_{\text{hyd.}}}{P}$

ArtNr



Contact
E-mail
Phone

Customer

Contact
E-mail
Phone

Technical data

Rexa PRO V06 DA-62

With motor

P 13.L-16/EAD0X4-T

Project ID Untitled project 2025-03-30 20:51:59.472


Project name

Installation location

Date 2025-03-30

Tender text

Submersible Sewage Pump as submersible, single-stage block unit in stationary, vertical installation to pump untreated sewage which doesn't attack the pump neither chemically nor mechanically. Pump with radially arranged discharge piece and axial pump intake. Service-friendly design by separated motor and pump casing. Pumping values to be guaranteed as per ISO 9906 Annex A

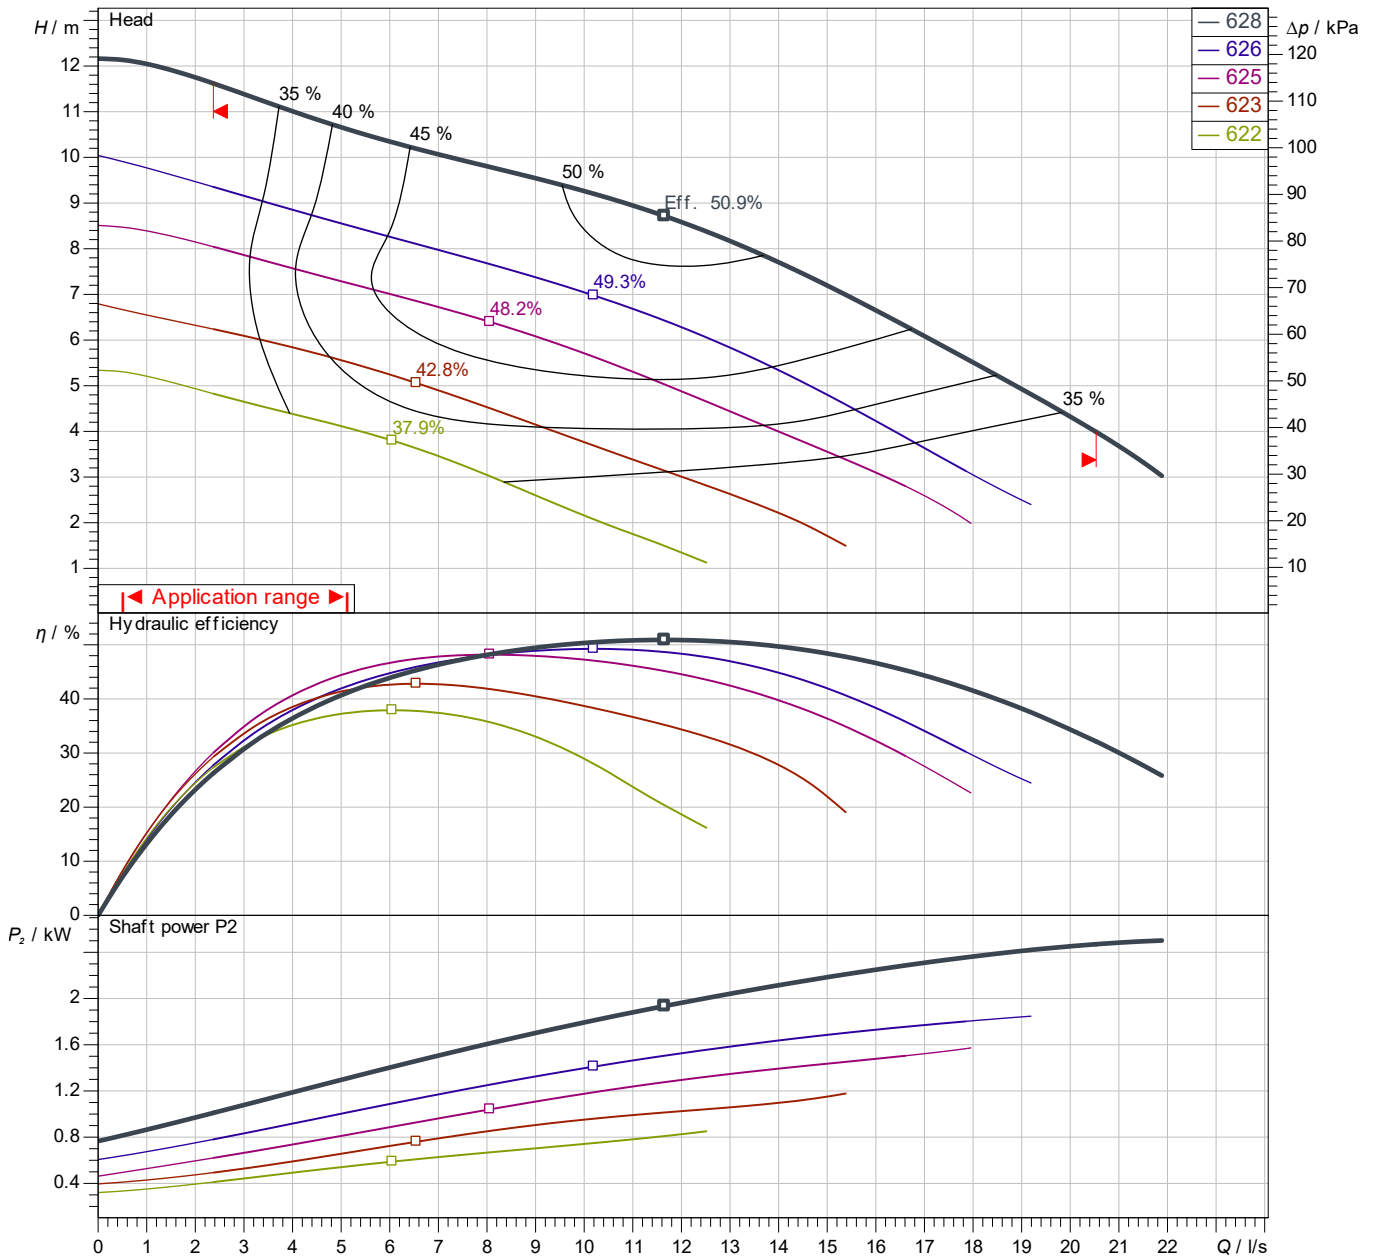

Power data referred to: Water; 20°C; 998.3kg/m³; 1.005mm²/s
Tolerance as per ISO 9906 / Annex A.2

Pump

Impeller Ø	designed	190 mm
Nominal speed		1,393 1/min
Frequency		50 Hz
Impeller type		Vortex impeller

Motor

Rated power	3.45 kW
Sel. explosion protection	ATEX

Duty point data

Volume flow	
Head	
Shaft power P2	
Hydr. efficiency η hyd.	
Power input P1	
Required pump NPSH	
Rotational speed	1447 1/min

Dimensions

Rexa PRO V06 DA-62

With motor

P 13.L-16/EAD0X4-T

Project ID


Untitled project 2025-03-30 20:51:59.472

Project name

Installation location

Customer pos. No.

Date 2025-03-30

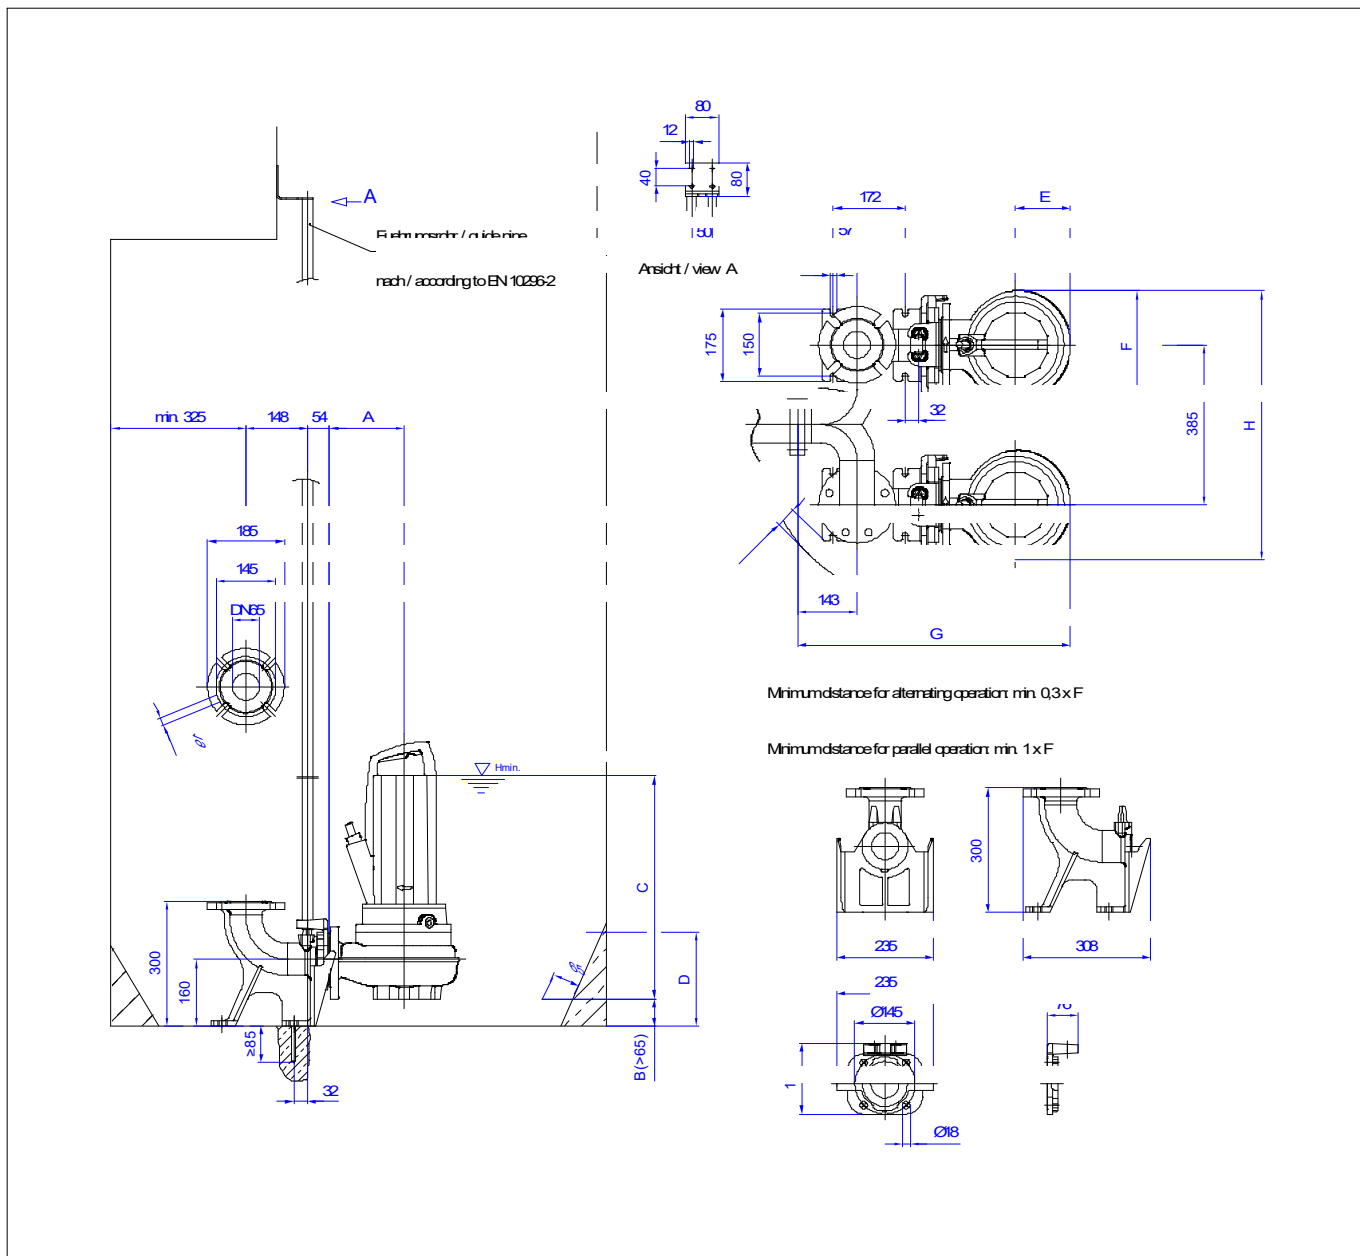

Dimensions

Name	Value	Name	Value
A	180 mm		
B	65 mm		
C	538 mm		
D	225 mm		
E	147 mm		
F	263 mm		
G	672 mm		
H	648 mm		

Connections

Suction port	DN65 PN10
Discharge port	DN65, DN80, Size 2.5, Size 3, PN10
Suspension device	DN65 DN65/2RK