

# 15SV17F150T/E

## Technical data

Company name  
Contact  
Phone number  
e-mail address

### Operating data

Pump type	Single head pump	Fluid	Water
Available system NPSH	m 0	Operating temperature t A	°C 4
Nominal flow	m <sup>3</sup> /h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m <sup>3</sup> 1000
Static head	m 0	Kin. viscosity at t A	mm <sup>2</sup> /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
		Altitude	m 0

### Pump data

Make	Lowara	Nominal	m <sup>3</sup> /h ( )
Speed	rpm 2900	Flow	Max- m <sup>3</sup> /h 24
Number of stages	17		Min- m <sup>3</sup> /h
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 2468.2	Head	at Qmax m 133.6
Head H(Q=0)	m 250		at Qmin m 251.6
Weight	kg 146	Shaft power	kW ( )
	Max. mm 105	Max. shaft power	kW 13.5
Impeller R	designed mm 105	Efficiency	%
	Min. mm 105	NPSH 3%	m

### Pump Materials

Pump body	Stainless steel / AISI 304
Impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
Outer sleeve	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Cast iron
Base	Aluminium
Coupling	Aluminium
SEAL HOUSING	Stainless steel / AISI 304
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 304
Tie rods	Galvanized steel
Wear ring	Technopolymer PPS

### Shaft Seal

e-SV Mechanical seal	Roten
e-SV - Uniten (-30 / +120 °C)	
1 - Rotating part	Silicon Carbide
2 - Stationary part	Resin impregnated carbon
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

### Motor data

Manufacturer	Lowara	Electric voltage	400 V	Speed	2930 rpm	Insulation class	F
Specific design	IE3 3ph Flange Motor - Premium Efficiency			Frame size	160 M	Colour	RAL 5010
Type	3MAS 160 M B5 15 kW						
Rated power	15 kW	Degree of protection IP55					
Electric current	26.6 A						

### Remarks:

# 15SV17F150T/E

## Performance curve

Company name  
Contact  
Phone number  
e-mail address


### Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 m <sup>3</sup> /h	Flow		Impeller R	105 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,7		Speed	2900 rpm

**Power datas referred to:**

Water [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s

Performance according to ISO 9906:2012 – Grade 3B

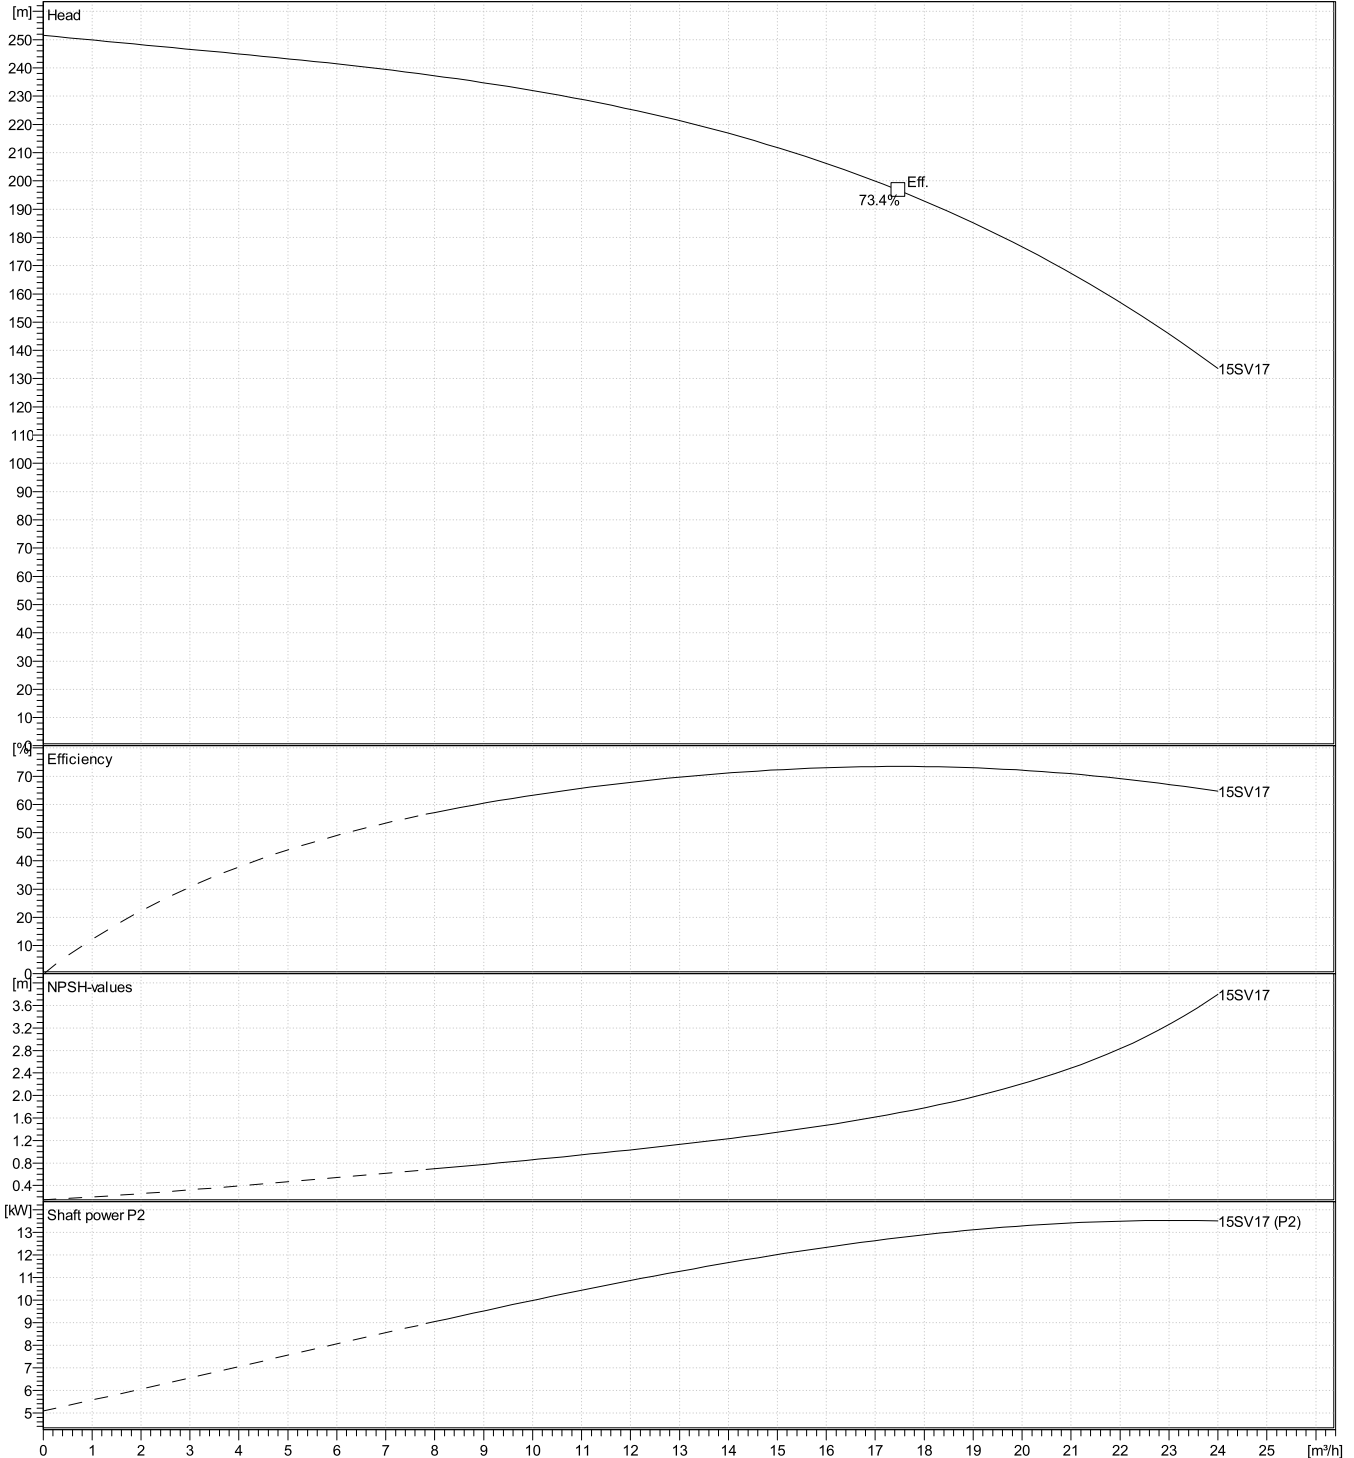


**15SV17F150T/E**

**Dimensions**

Company name  
Contact  
Phone number  
e-mail address

**Drawing**

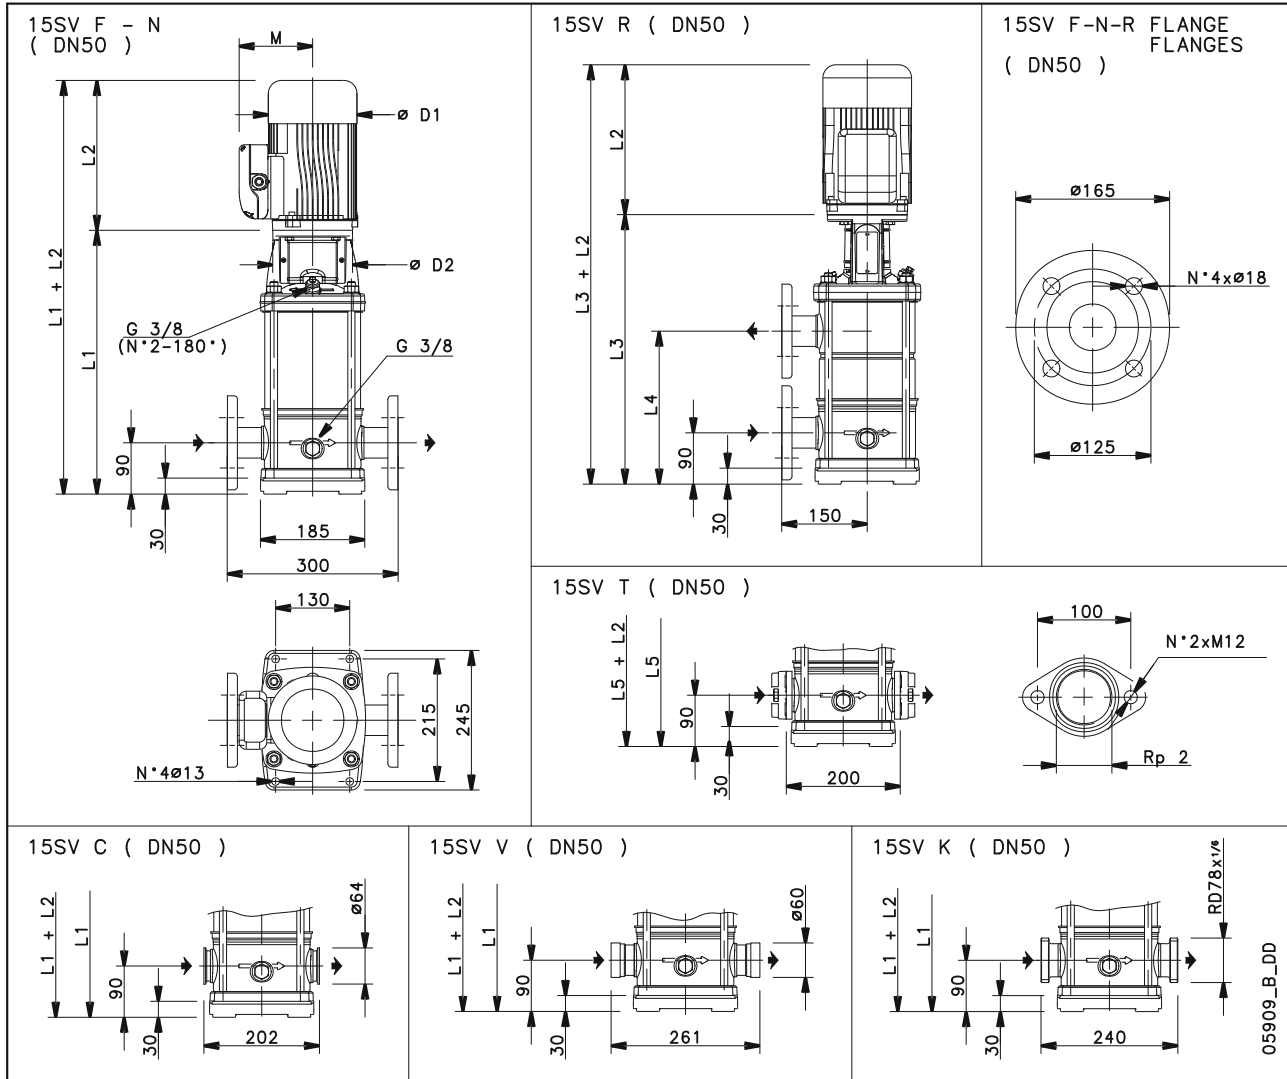

**Dimensions mm**

Electrical and dimensional data refer to IE3 motor

D1	328					Weight 100 kg
D2	350					
L1	1236					
L2	500					
L3	1236					
L4	925					
L5						
M	252					