

ESHF 65-200/150/P25VSNA

Technical data

Company name
Contact
Phone number
e-mail address

Operating data			
1	Pumpe type	Single head pump	Fluid Water, pure
2	No. of pumps	1	Operating temperature t A °C 4
3	Nominal flow	m ³ /h 0	Max / Min Operating Temperature mech. Seal °C 120 / -10
4	Nominal head	m 0	pH-value at t A 7
5	Static head	m 0	Density at t A kg/m ³ 1000
6	Inlet pressure	kPa 0	Kin. viscosity at t A mm ² /s 1.569
7	Environmental temperature	°C 20	Vapor pressure at t A kPa 100
8	Available system NPSH	m 0	Altitude 0

Pump data			
9	Lubrication	Standard, Grease lubrication [Std]	
10	Execution	Unit with standard coupling	
11	Design	Horizontal	
12	Operating speed	2900 rpm	Stages 1
13	Suction nozzle	DN 80 / PN 16 / EN1092-1	Impeller Ø
14	Discharge nozzle	DN 65 / PN 16 / EN1092-1	
15	Max. casing pressure	kPa 1200	Flow
16	Max. working pressure	kPa 525.9	
17	Impeller type	Radial impeller	
18	Head H(Q=0)	m 54	Head
19	Max. shaft power	kW 14.9	
20	Pump weight	kg	Shaft power kW
21	Total weight	kg 185.0	Efficiency %
			NPSH 3% m

Materials			
22		Pump	Shaft Seal
23	Pump body	Stainless steel / AISI 316L	Single mechanical seal, without shaft sleeve
24	Impeller	Stainless steel / ASTMCF8M	Uniten 3K VBVGG
25	SEAL HOUSING	Stainless steel / AISI 316L	Mechanical seal diameter 28 mm
26	Wear ring	Stainless steel / AISI 316L	1. Rotating ring Ceramic
27	Counterwear ring	Stainless steel / AISI 316L	2. Stationary ring Carbon graphite resin impregnated
28	Shaft extension	Stainless steel / AISI 316L	3. Secondary seal Fluorine rubber (FKM)
29	Impeller locknut and washer	Stainless steel / AISI 316	4. Springs CrNiMo - Steel
30	Tab	Stainless steel / AISI 316L	5. Others CrNiMo - Steel
31	Fill/drain plugs	Stainless steel / AISI 316	Gaskets of the pump Fluorine rubber (FKM)
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			

Motor data				Coupling			
42	Manufacturer	Lowara		Manufacturer	Not applicable		
43	Specific design	IE3 3ph Surface Motor - Premium Efficiency		Series	Not applicable		
44	Type	PLM 160 B3 15 kW		Shaft diameter	Pump 0 mm	Motor 42 mm	
45	Rated power	15 kW	Rated current 26.6 A	Frame size	Not applicable		
46	Nominal speed	2940 rpm	Rated voltage 400 V	Spacer length	mm	Not applicable	
47	Frame size	160	Service factor 1	Weight	kg		
48	Weight	kg 99.5	Degree of protection IP55	Coupling protection	Not applicable		

Base plate			Remarks			
49	Name	Not applicable				
50	Weight	kg				

ESHF 65-200/150/P25VSNA

Performance curve

Company name
Contact
Phone number
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency	Hz	50
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed	rpm	2900
actual	192	47.2	114	77.1	53.6	42.9	14.9	12.8	Nominal flow	m³/h	0	
Min.	0	/	/	77.1	53.6	42.9	/	12.8	Nominal head	m	0	
Max.	210	/	/	83	65.7	56.3	/	17.8	Inlet pressure	kPa	0	
									Static head	m	0	

Power datas referred to:

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

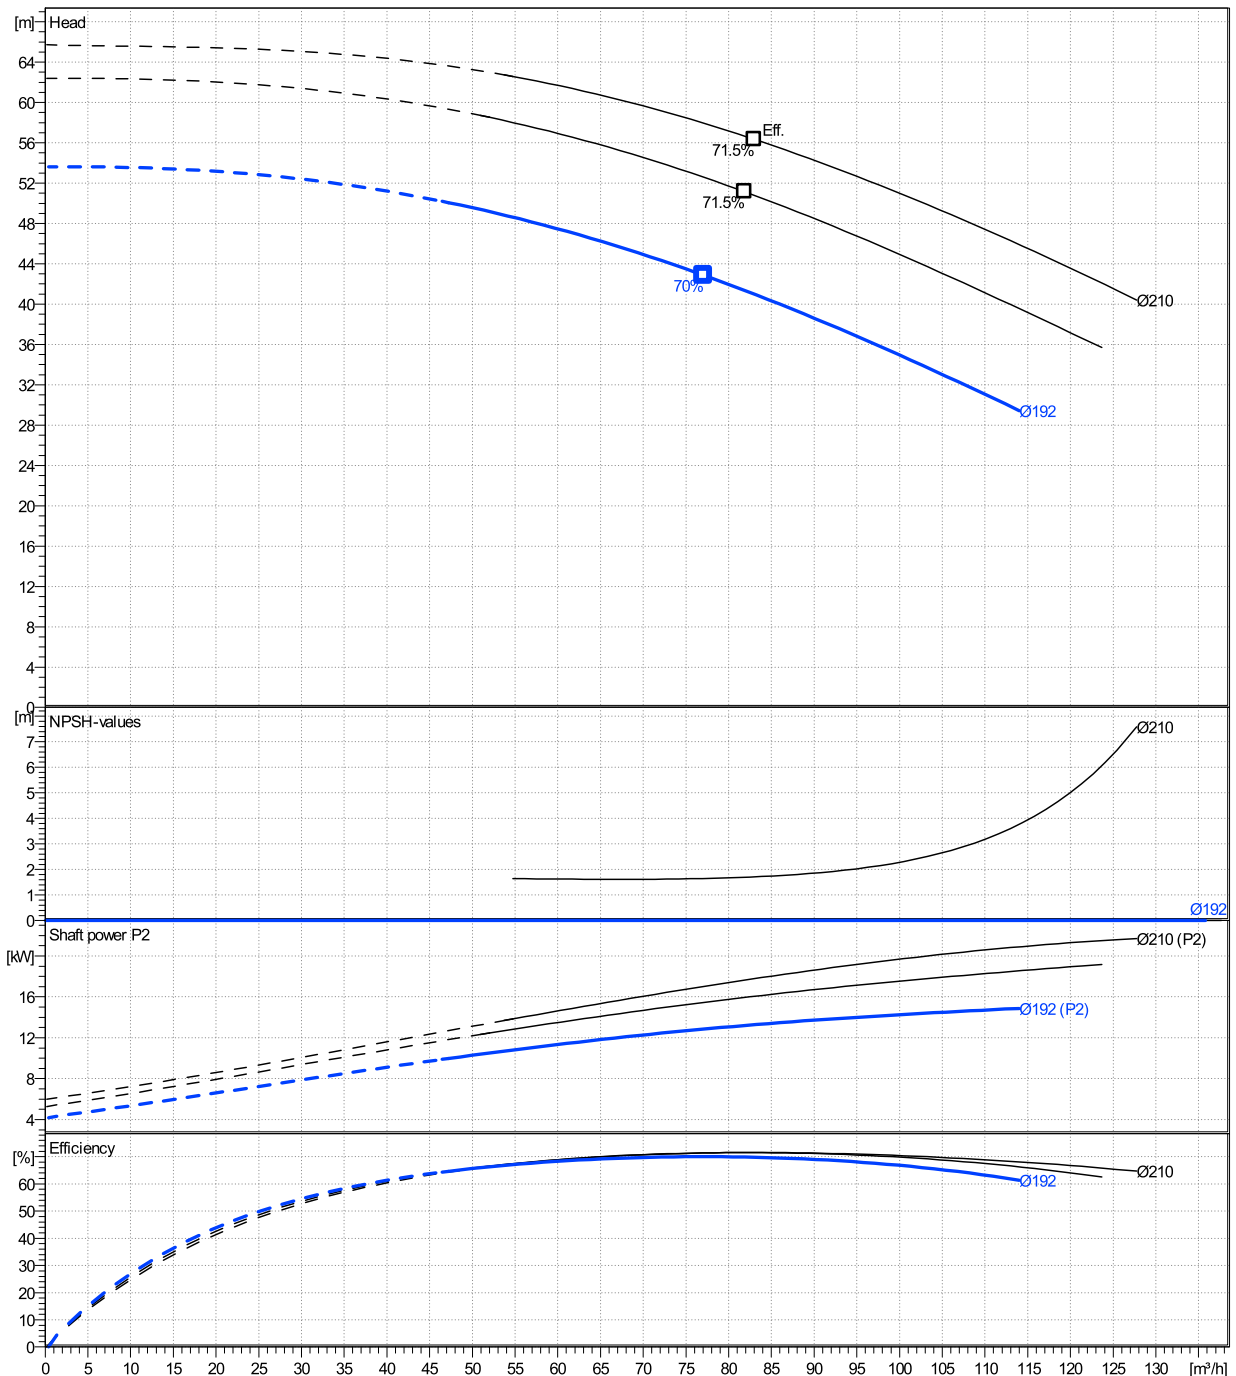


ESHF 65-200/150/P25VSNA

Dimensions

Company name
Contact
Phone number
e-mail address

Frame mounted
Unit with standard coupling
PLM 160 B3 15 kW

Electrical and dimensional data refer to IE3 motor

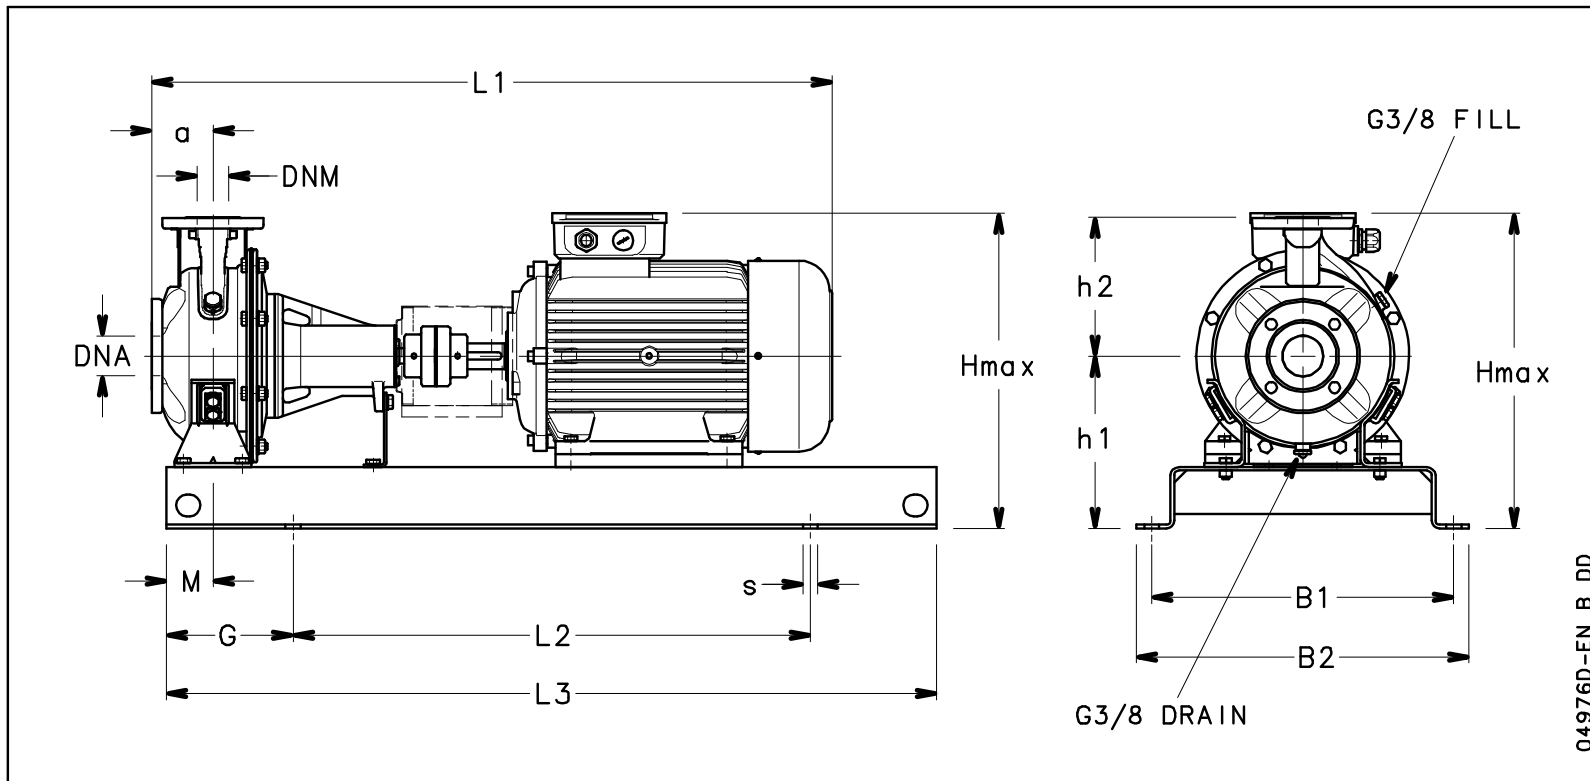

Dimensions		[mm]	
a	100		
B1	490		
B2	540		
Coupling Type	Ø2		
DNA	80		
DNM	65		
G	205		
h1	280		
h2	225		
Hmax	520		
L1	1067		
L2	840		
L3	1250		
M	75		
Sscrews	M20		

Weight	
Total weight	185 kg

Connections			
Suction nozzle		Discharge nozzle	
DN 80		DN 65	
PN 16		PN 16	
EN1092-1		EN1092-1	
D	200	D	185
Dia. Holes	18	Dia. Holes	18
DN	80	DN	65
G	114	G	104
M	160	M	145
Max thickness	20	Max thickness	18

Dimensions and weight without obligation

Project	Xylect-20123150	Created by		Last update	12/19/2024
Block	ESHF 65-200/220/L25VSNA	Created on	12/19/2024		