

ESHF 65-200/220/L25VSNA

Technical data

Company name
Contact
Phone number
e-mail address

Operating data						
1	Pumpe type	Single head pump		Fluid	Water, pure	
2	No. of pumps	1		Operating temperature t A	°C	4
3	Nominal flow	m ³ /h	0	Max / Min Operating Temperature mech. Seal	°C	120 / -10
4	Nominal head	m	0	pH-value at t A	7	
5	Static head	m	0	Density at t A	kg/m ³	1000
6	Inlet pressure	kPa	0	Kin. viscosity at t A	mm ² /s	1.569
7	Environmental temperature	°C	20	Vapor pressure at t A	kPa	100
8	Available system NPSH	m	0	Altitude	0	

Pump data						
9	Lubrication	Standard, Grease lubrication [Std]				
10	Execution	Unit with standard coupling				
11	Design	Horizontal				Impeller Ø
12	Operating speed	2900 rpm	Stages	1		Max. mm 210
13	Suction nozzle	DN 80 /	PN 16 /	EN1092-1		designed mm 210
14	Discharge nozzle	DN 65 /	PN 16 /	EN1092-1		Min. mm 192
15	Max. casing pressure	kPa	1200			Flow
16	Max. working pressure	kPa	627.3			
17	Impeller type	Radial impeller				Head
18	Head H(Q=0)	m	64			
19	Max. shaft power	kW	20.8			Min- m ³ /h 54
20	Pump weight	kg				Nominal m
21	Total weight	kg	235.0			at Qmax m 39.3
						at Qmin m 60.9
						Shaft power kW
						Efficiency %
						NPSH 3% m

Materials						
22		Pump			Shaft Seal	
23	Pump body	Stainless steel / AISI 316L			Single mechanical seal, without shaft sleeve	
24	Impeller	Stainless steel / ASTMCF8M			Uniten 3K	VBVGG
25	SEAL HOUSING	Stainless steel / AISI 316L			Mechanical seal diameter 28 mm	
26	Wear ring	Stainless steel / AISI 316L			1. Rotating ring	Ceramic
27	Counterwear ring	Stainless steel / AISI 316L			2. Stationary ring	Carbon graphite resin impregnated
28	Shaft extension	Stainless steel / AISI 316L			3. Secondary seal	Fluorine rubber (FKM)
29	Impeller locknut and washer	Stainless steel / AISI 316			4. Springs	CrNiMo - Steel
30	Tab	Stainless steel / AISI 316L			5. Others	CrNiMo - Steel
31	Fill/drain plugs	Stainless steel / AISI 316			Gaskets of the pump Fluorine rubber (FKM)	
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						

Motor data				Coupling			
Electrical and dimensional data refer to IE3 motor							
42	Manufacturer	Lowara		Manufacturer	Not applicable		
43	Specific design	IE3 3ph Surface Motor - Premium Efficiency		Series	Not applicable		
44	Type	3MAS 180 M B3 22 kW		Shaft diameter	Pump	0 mm	Motor 48 mm
45	Rated power	22 kW	Rated current	37.9 A	Frame size	Not applicable	
46	Nominal speed	2960 rpm	Rated voltage	400 V	Spacer length	mm	Not applicable
47	Frame size	180 M	Service factor	1	Weight	kg	
48	Weight	kg	127.3	Degree of protection	IP55	Coupling protection	Not applicable

Base plate			Remarks			
49	Name	Not applicable				
50	Weight	kg				

ESHF 65-200/220/L25VSNA

Performance curve

Company name
Contact
Phone number
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency		Hz	50
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed rpm	2900		
actual	210	54	126	81.8	63.9	54.8		20.8	17.1	Nominal flow	m³/h	0	
Min.	0	/	/	78.6	55.9	44.7		/	13.7	Nominal head	m	0	
Max.	210	/	/	81.8	63.9	54.8		/	17.1	Inlet pressure	kPa	0	
										Static head	m	0	

Power datas referred to:

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

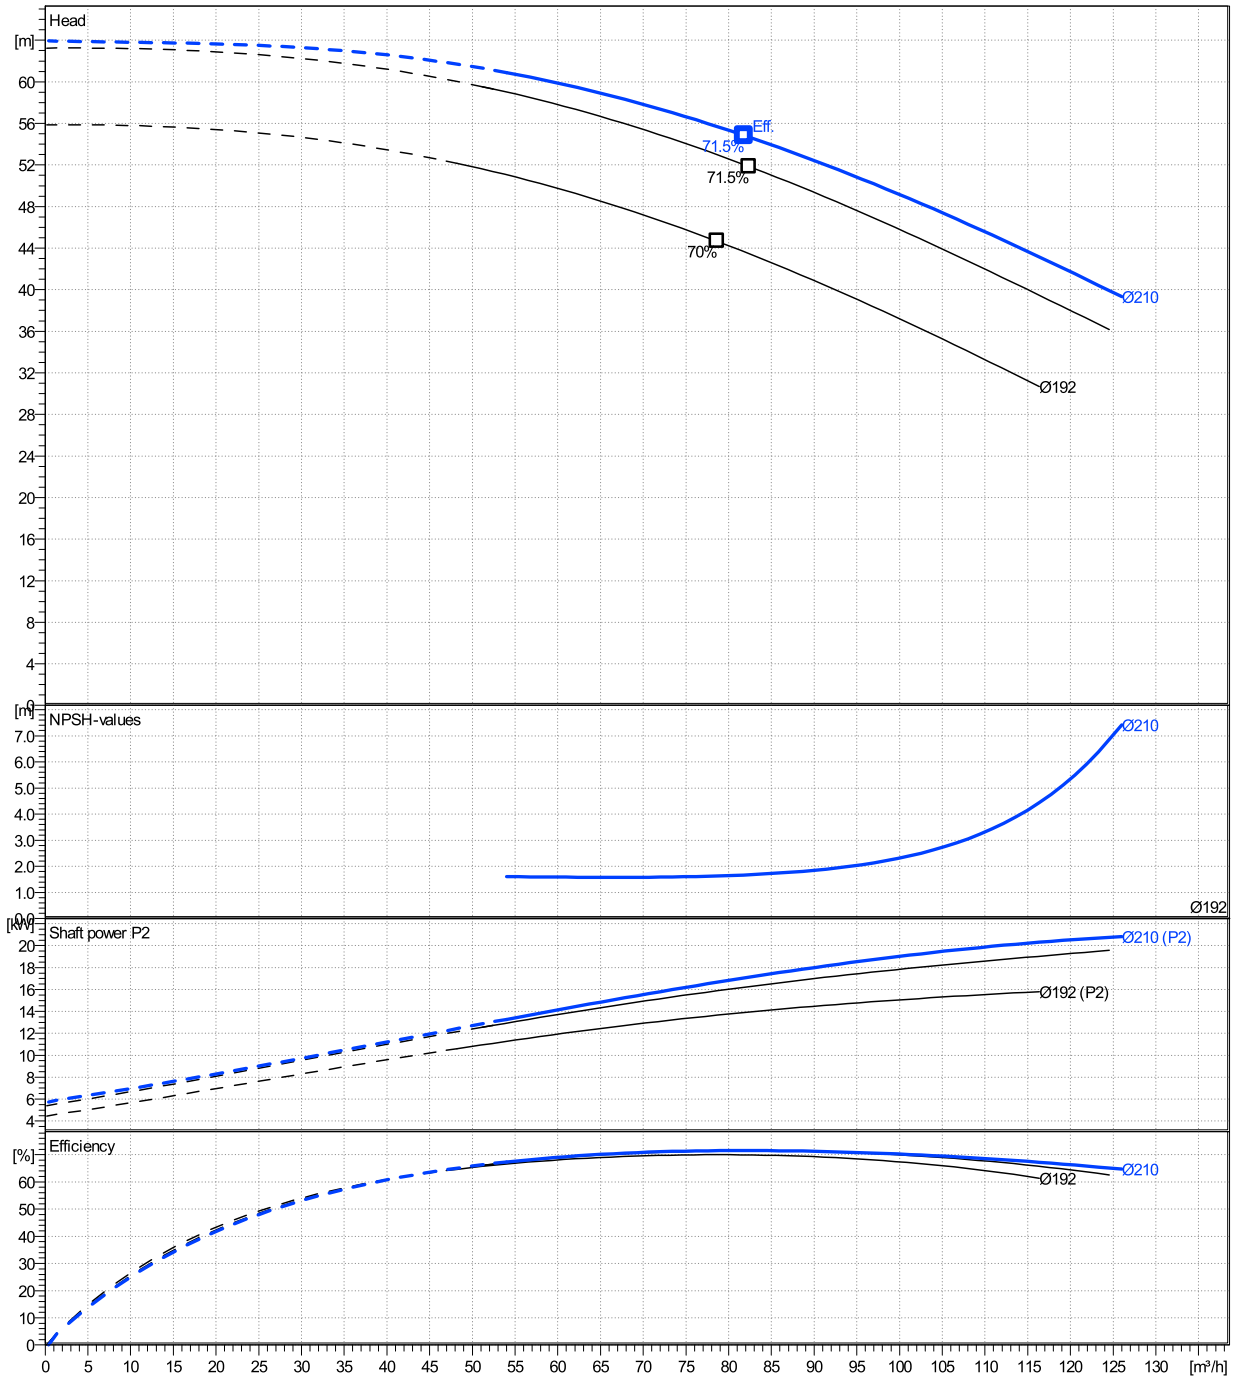


ESHF 65-200/220/L25VSNA

Dimensions

Company name
Contact
Phone number
e-mail address

Frame mounted
Unit with standard coupling
3MAS 180 M B3 22 kW

Electrical and dimensional data refer to IE3 motor

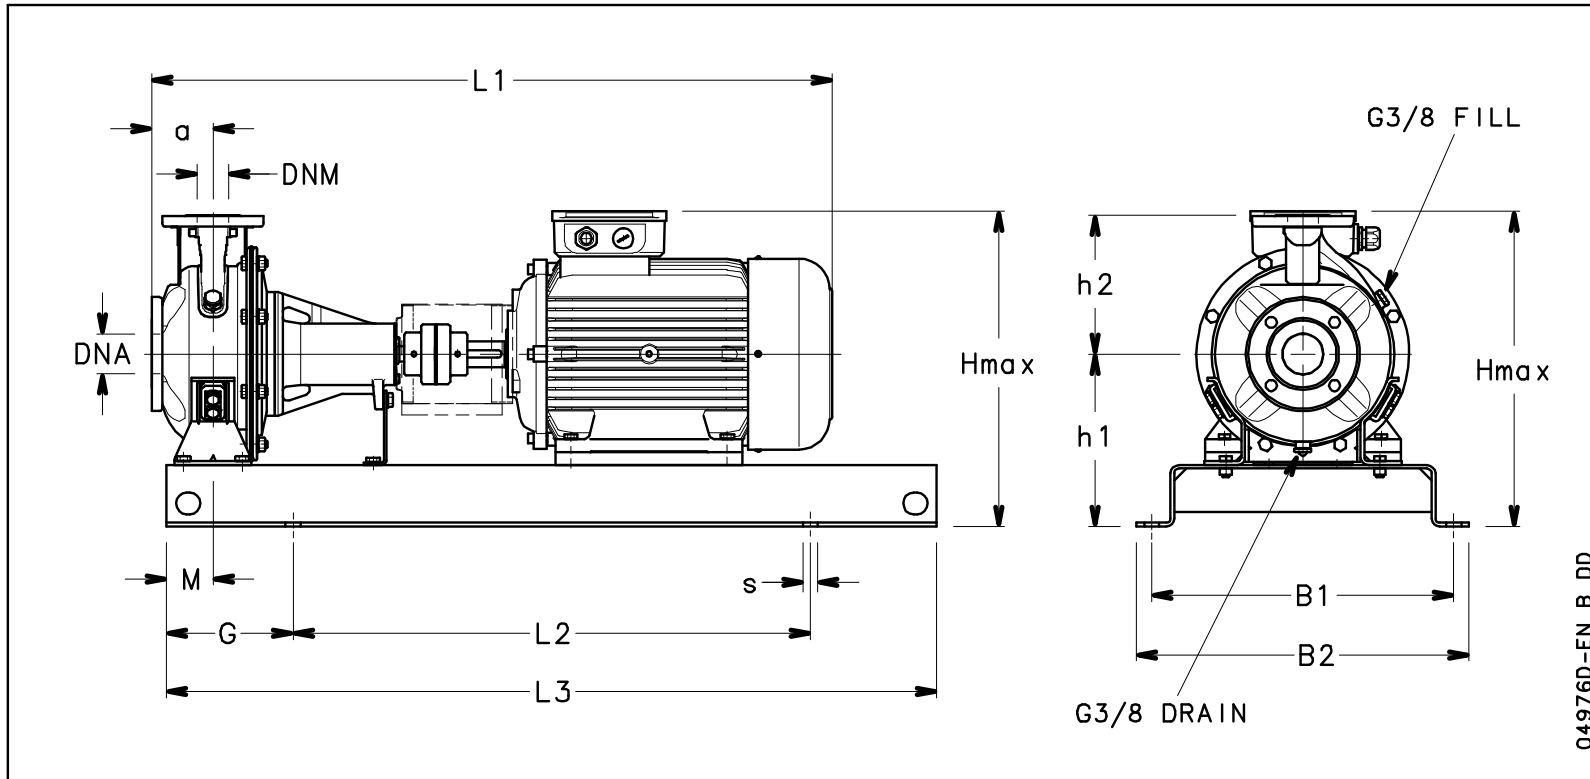

Dimensions [mm]

a	100
B1	490
B2	540
Coupling Type	D1
DNA	80
DNM	65
G	205
h1	280
h2	225
Hmax	533
L1	1164
L2	840
L3	1250
M	75
Sscrews	M20

Weight

Total weight	235 kg
--------------	--------

Connections

Suction nozzle	Discharge nozzle
DN 80	DN 65
PN 16	PN 16
EN1092-1	EN1092-1
D 200	D 185
Dia. Holes 18	Dia. Holes 18
DN 80	DN 65
G 114	G 104
M 160	M 145
Max thickness 25	Max thickness 18

Dimensions and weight without obligation

Project	Xylect-20123150
Block	ESHF 65-200/220/L25VSNA

Created by	
Created on	12/19/2024

Last update	12/19/2024
-------------	------------