

LNEE 80-160/55/P25VCC4

Technical data

Company name
Contact
Phone number
e-mail address

Operating data

1	Pumpe type	Single head pump	Fluid	Water
2	No. of pumps	1	Operating temperature t A	°C 4
3	Nominal flow	m³/h 0	Max / Min Operating Temperature mech. Seal	°C 120 / -25
4	Nominal head	m 0	pH-value at t A	7
5	Static head	m 0	Density at t A	kg/m³ 1000
6	Inlet pressure	kPa 0	Kin. viscosity at t A	mm²/s 1.569
7	Environmental temperature	°C 20	Vapor pressure at t A	kPa 100
8	Available system NPSH	m 0	Altitude	0

Pump data

9	Lubrication	Standard, Grease lubrication [Std]		
10	Execution			
11	Design	In-Line single head		
12	Operating speed	2900 rpm	Stages	1
13	Suction nozzle	DN 80 /	PN 16 /	EN1092-2
14	Discharge nozzle	DN 80 /	PN 16 /	EN1092-2
15	Max. casing pressure	kPa		
16	Max. working pressure	kPa 225		
17	Impeller type	Radial impeller		
18	Head H(Q=0)	m 23		
19	Max. shaft power	kW 5.2		
20	Pump weight	kg		
21	Total weight	kg 84.0		

Impeller Ø	Max.	mm	180
	designed	mm	130
	Min.	mm	130
Flow	Nominal	m³/h	
	Max-	m³/h	103
	Min-	m³/h	20.4
Head	Nominal	m	
	at Qmax	m	12
	at Qmin	m	22.2
Shaft power		kW	
Efficiency		%	
NPSH 3%		m	

Materials

22		Pump		Shaft Seal
23	Volute Casing	Cast iron		Single mechanical seal, without shaft sleeve
24	Casing Cover	Cast iron		eMG12 - Ø28mm
25	Impeller	Cast iron / ASTM Class 30		BQ7EGG-WA
26	Stub shaft	Stainless steel / AISI 316L		Mechanical seal diameter
27	Wear ring	Stainless steel / AISI 304		28 mm
28	Impeller lock nut and washer	Stainless steel / AISI 304		1. Rotating ring
29	Impeller key	Stainless steel / AISI 316L		Carbon graphite resin impregnated
30	Fill and drain plugs	Nickel-plated brass		2. Stationary ring
31				SiC, silicon carbide, sintered press.less
32				3. Secondary seal
33				Ethylene propylene rubber (EPDM)
34				4. Springs
35				CrNiMo - Steel
36				5. Others
37				EPDM - WRAS
38				Gaskets of the pump
39				Ethylene propylene rubber (EPDM)
40				
41				

Motor data

Electrical and dimensional data refer to IE3 motor

42	Manufacturer	Lowara		
43	Specific design	IE3 3ph Flange Motor		
44	Type	PLM 112 B14 5,5 kW		
45	Rated power	5.5 kW	Rated current	10.4 A
46	Nominal speed	2880 rpm	Rated voltage	400 V
47	Frame size	112	Service factor	1
48	Weight	kg 35.5	Degree of protection	IP55

Remarks

49	
50	
50	
52	

Project	Xylect-20127611	Created by		Last update	12/20/2024
Block	LNEE 80-160/22/P45RCC4	Created on	12/20/2024		

LNEE 80-160/55/P25VCC4

Performance curve

Company name
Contact
Phone number
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency		Hz
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed	rpm	
actual	130	20.4	103	78.7	22.9	16.7		5.24	4.94	Nominal flow	m³/h	0
Min.	0	/	/	78.7	22.9	16.7		/	4.94	Nominal head	m	0
Max.	180	/	/	113	46.6	36.9		/	14.4	Inlet pressure	kPa	0
										Static head	m	0

Power datas referred to:

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

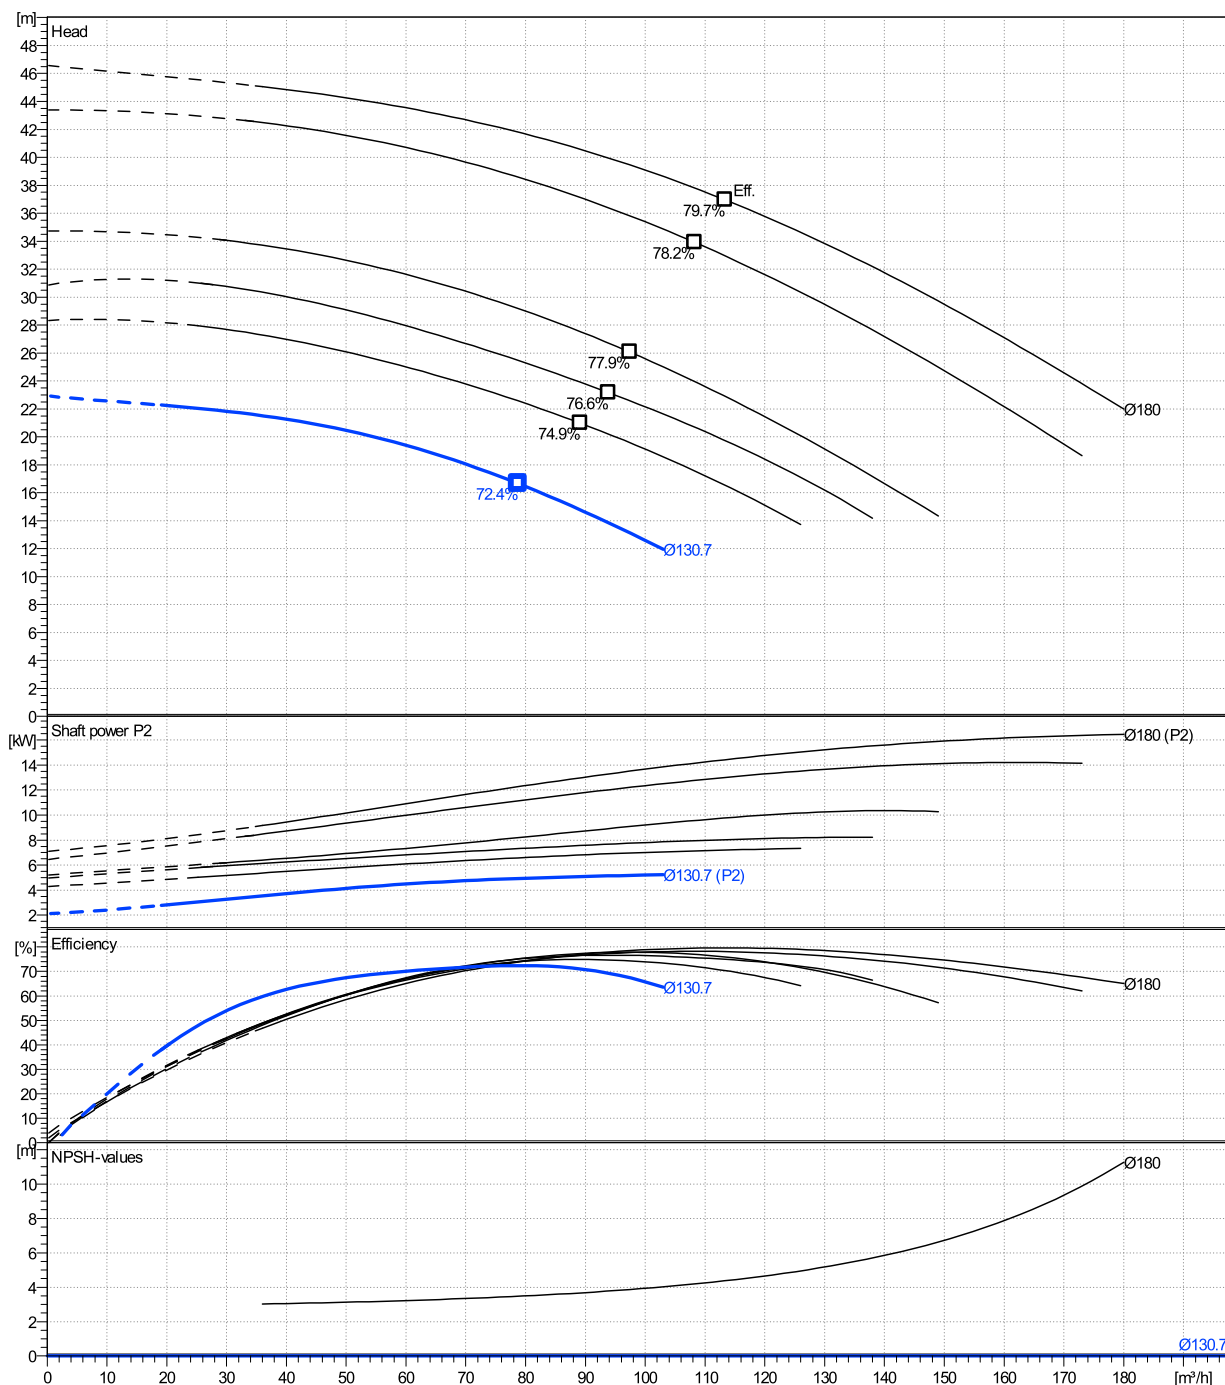

LNEE 80-160/55/P25VCC4


Dimensions

Company name
Contact
Phone number
e-mail address

Close coupled

PLM 112 B14 5,5 kW


Electrical and dimensional data refer to IE3 motor

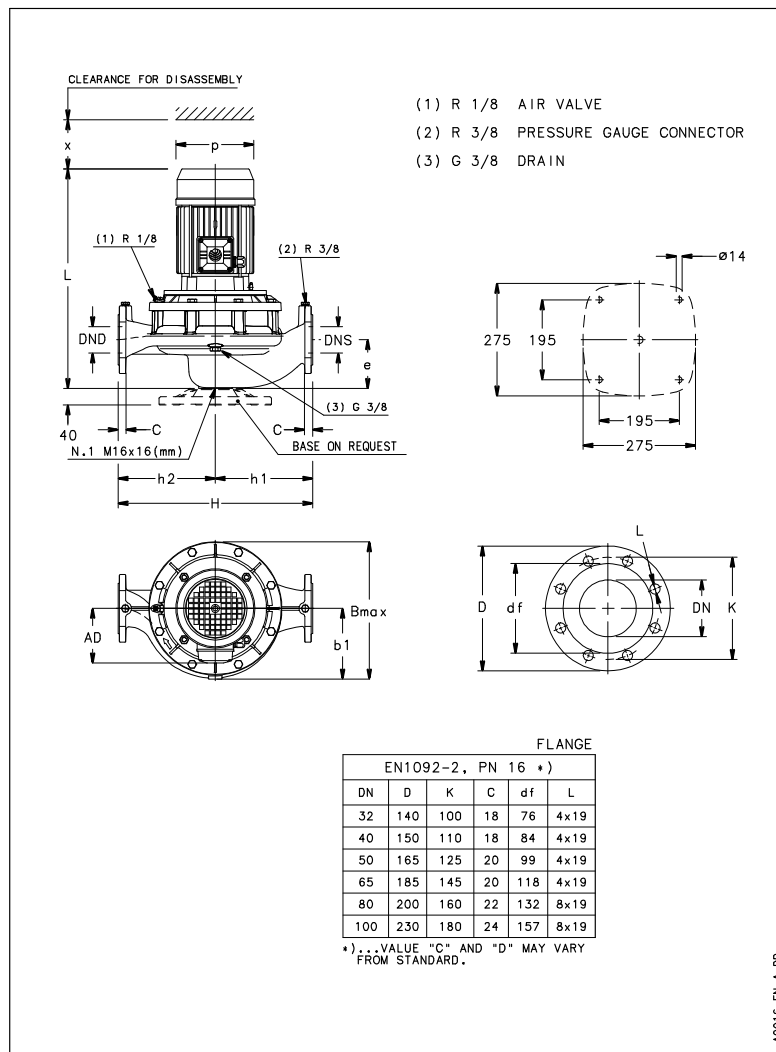

Dimensions		[mm]	
AD	168		
b1	168		
Bmax	336		
DND	80		
DNS	80		
e	114		
H	420		
h1	215		
h2	205		
L	582		
p	214		
x	111		

Weight	
Total weight	84 kg

Connections			
Suction nozzle		Discharge nozzle	
DN 80		DN 80	
PN 16		PN 16	
EN1092-2		EN1092-2	
C	22	C	22
D	200	D	200
df	132	df	132
DN	80	DN	80
K	160	K	160
L	8 x 19	L	8 x 19

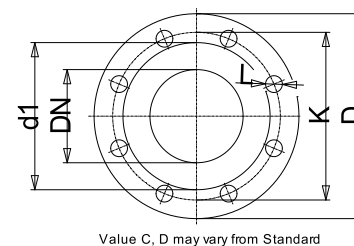

Value C, D may vary from Standard

Dimensions and weight without obligation

Project	Xylect-20127611	Created by		Last update	12/20/2024
Block	LNEE 80-160/22/P45RCC4	Created on	12/20/2024		