

LNES 40-125/30/P25RCS4

Technical data

Company name
Contact
Phone number
e-mail address

Operating data					
1	Pumpe type	Single head pump		Fluid	Water
2	No. of pumps	1		Operating temperature t A	°C 4
3	Nominal flow	m ³ /h	0	Max / Min Operating Temperature mech. Seal	°C 120 / -25
4	Nominal head	m	0	pH-value at t A	7
5	Static head	m	0	Density at t A	kg/m ³ 1000
6	Inlet pressure	kPa	0	Kin. viscosity at t A	mm ² /s 1.569
7	Environmental temperature	°C	20	Vapor pressure at t A	kPa 100
8	Available system NPSH	m	0	Altitude	0

Pump data					
9	Lubrication	Standard, Grease lubrication [Std]			
10	Execution				
11	Design	In-line		Impeller Ø	Max. mm 145
12	Operating speed	2900 rpm	Stages 1		designed mm 145
13	Suction nozzle	DN 40 /	PN 16 / EN1092-2		Min. mm 113
14	Discharge nozzle	DN 40 /	PN 16 / EN1092-2	Flow	Nominal m ³ /h
15	Max. casing pressure	kPa			Max- m ³ /h 41.5
16	Max. working pressure	kPa	270.2	Min- m ³ /h 10	
17	Impeller type	Radial impeller		Head	Nominal m
18	Head H(Q=0)	m	28		at Qmax m 10.1
19	Max. shaft power	kW	2.9		at Qmin m 28.1
20	Pump weight	kg		Shaft power	kW
21	Total weight	kg	46.4	Efficiency	%
				NPSH 3%	m

Materials					
22		Pump		Shaft Seal	
23	Volute Casing	Cast iron		Single mechanical seal, without shaft sleeve	
24	Casing Cover	Cast iron		eMG12 - Ø22mm	BQ7EGG-WA
25	Impeller	Stainless steel / AISI 304		Mechanical seal diameter	22 mm
26	Stub shaft	Stainless steel / AISI 316L		1. Rotating ring	Carbon graphite resin impregnated
27	Wear ring	Stainless steel / AISI 304		2. Stationary ring	SiC, silicon carbide, sintered press.less
28	Impeller lock nut and washer	Stainless steel / AISI 304		3. Secondary seal	Ethylene propylene rubber (EPDM)
29	Impeller key	Stainless steel / AISI 316L		4. Springs	CrNiMo - Steel
30	Fill and drain plugs	Nickel-plated brass		5. Others	EPDM - WRAS
31				Gaskets of the pump	Ethylene propylene rubber (EPDM)
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					

Motor data					
Electrical and dimensional data refer to IE3 motor					
42	Manufacturer	Lowara			
43	Specific design	IE3 3ph Flange Motor - Premium Efficiency			
44	Type	PLM 100R B5 3 kW			
45	Rated power	3 kW	Rated current	11 A	
46	Nominal speed	2865 rpm	Rated voltage	230 V	
47	Frame size	100R	Service factor	1	
48	Weight	kg 22.0	Degree of protection	IP55	

Remarks					
49					
50					
50					
52					

LNES 40-125/30/P25RCS4

Performance curve

Company name
Contact
Phone number
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency	Hz	50
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed	rpm	2900
actual	145	10	41.5	25	27.5	24.2	2.94	2.45	0.918	Nominal flow	m³/h	0
Min.	0	/	/	16.4	14.1	11.7	/	/	0.918	Nominal head	m	0
Max.	145	/	/	25	27.5	24.2	/	/	2.45	Inlet pressure	kPa	0
										Static head	m	0

Power datas referred to:

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

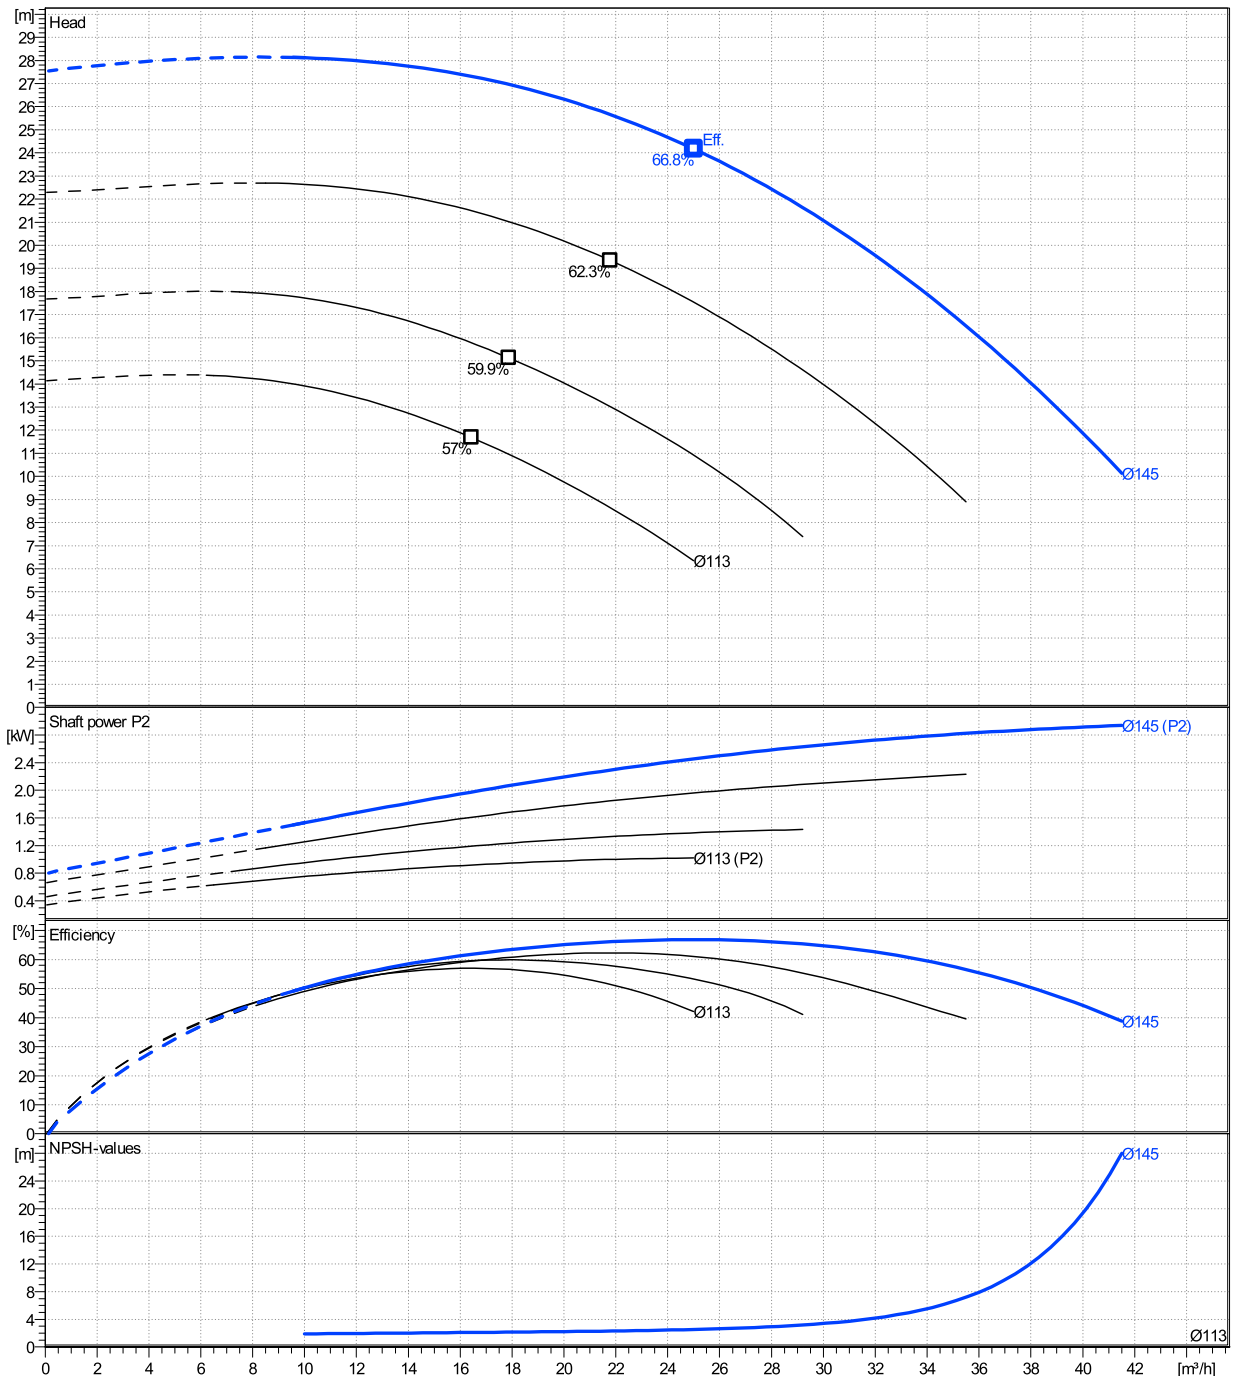

LNES 40-125/30/P25RCS4


Dimensions

Company name
Contact
Phone number
e-mail address


Rigid coupling

PLM 100R B5 3 kW

Electrical and dimensional data refer to IE3 motor

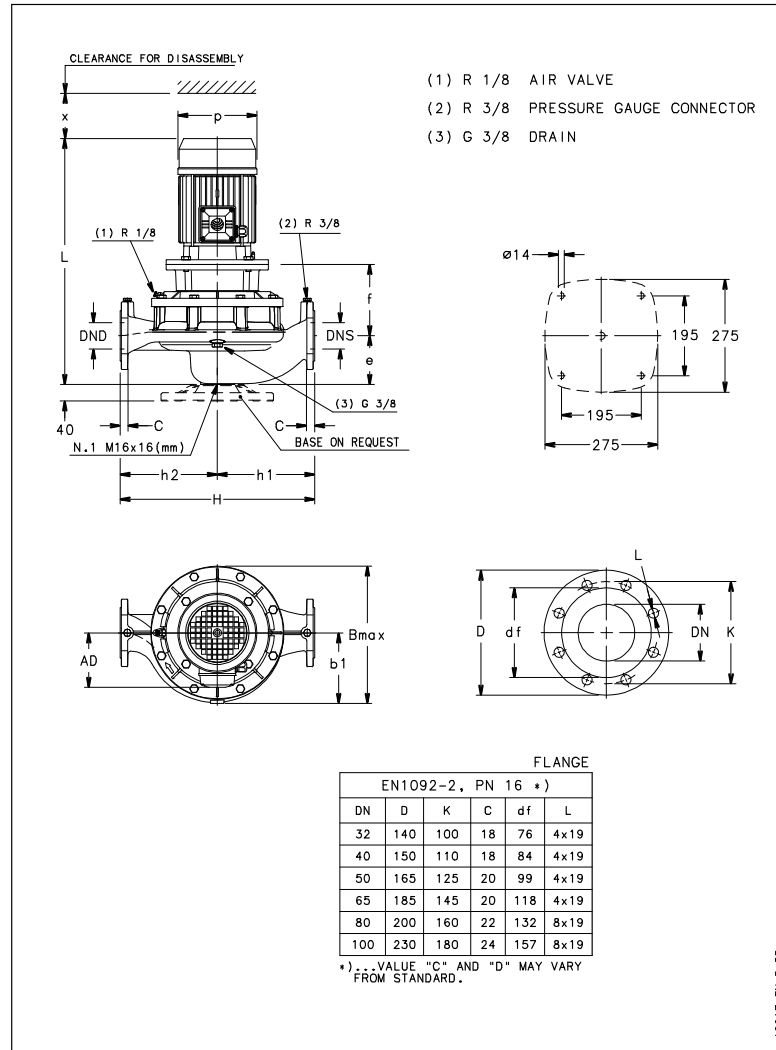

A0017-EN_LB_DD

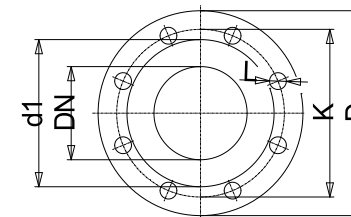

Value C, D may vary from Standard

Dimensions		[mm]	
AD	134		
b1	128		
Bmax	249		
DNd	40		
DNs	40		
e	100		
f	175		
H	320		
h1	160		
h2	160		
L	573		
p	174		
x	94		

Weight	
Total weight	46.4 kg

Connections			
Suction nozzle		Discharge nozzle	
DN 40		DN 40	
PN 16		PN 16	
EN1092-2		EN1092-2	
C	18	C	18
D	150	D	150
df	84	df	84
DN	40	DN	40
K	110	K	110
L	4 x 19	L	4 x 19

Dimensions and weight without obligation

Project	Xylect-20128214
Block	LNES 40-125/30/P25RCS4

Created by
Created on 12/21/2024

Last update 12/21/2024