

# NSCE32-250/22/P46PCS4

## Technical data

Company name  
Contact  
Phone number  
e-mail address

Operating data					
1	Pumpe type	Single head pump	Fluid	Water, pure	
2	No. of pumps	1	Operating temperature t A	°F	39.2
3	Nominal flow	US g.p.m. 0	Max / Min Operating Temperature mech. Seal	°F	120 / -25
4	Nominal head	ft 0	pH-value at t A		7
5	Static head	ft 0	Density at t A	lb/ft <sup>3</sup>	62.4
6	Inlet pressure	psi 0	Kin. viscosity at t A	ft <sup>2</sup> /s	1.689E-5
7	Environmental temperature	°F 68	Vapor pressure at t A	psi	14.5
8	Available system NPSH	ft 0	Altitude		0

Pump data					
9	Lubrication	Standard, Grease lubrication [Std]			
10	Execution	4 poles motor			
11	Design	Horizontal			
12	Operating speed	1740 rpm	Stages	1	
13	Suction nozzle	DN 50 /	PN 16 /	EN1092-2	
14	Discharge nozzle	DN 32 /	PN 16 /	EN1092-2	
15	Max. casing pressure	psi		Impeller Ø	Max. inch 10 3/16
16	Max. working pressure	psi	33.5		designed inch 8 7/8
17	Impeller type	Radial impeller			Min. inch 8 7/8
18	Head H(Q=0)	ft	77	Flow	Nominal US g.p.m.
19	Max. shaft power	hp	2.8		Max- US g.p.m. 96.3
20	Pump weight	kg			Min- US g.p.m. 32.8
21	Total weight	lb	163.1	Head	Nominal ft
					at Qmax ft 36.2
				Shaft power	at Qmin ft 76.2
				Efficiency	%
				NPSH 3%	ft

Materials					
22		Pump		Shaft Seal	
23	Volute Casing	Cast Iron		Single mechanical seal, without shaft sleeve	
24	Casing Cover	Cast Iron		eMG12 - Ø28mm	BQ7EGG-WA
25	Impeller	Fabricated Stainless Steel		Mechanical seal diameter	1 1/8 inch
26	Shaft	Stainless steel		1. Rotating ring	Carbon graphite resin impregnated
27	Wear ring	Stainless steel		2. Stationary ring	SiC, silicon carbide, sintered press.less
28	Impeller lock nut and washer	Stainless steel		3. Secondary seal	Ethylene propylene rubber (EPDM)
29	Impeller key	Stainless steel		4. Springs	CrNiMo - Steel
30	Fill and drain plugs	Stainless steel		5. Others	EPDM - WRAS
31				Gaskets of the pump	Ethylene propylene rubber (EPDM)
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					

Motor data					
Electrical and dimensional data refer to IE3 motor					
42	Manufacturer	Lowara			
43	Specific design	IE3 3ph Flange Motor			
44	Type	PLM 100 B14 2,2 kW			
45	Rated power	2.9502 hp	Rated current	8.19 A	
46	Nominal speed	1740 rpm	Rated voltage	220 V	
47	Frame size	100	Service factor	1	
48	Weight	lb 63.5	Degree of protection	IP55	

Remarks					
49					
50					
50					
52					

# NSCE32-250/22/P46PCS4

## Performance curve

Company name  
Contact  
Phone number  
e-mail address


	Ø mm	Pump capacity			Pump head		Shaft power P2			Frequency	Hz	
		Operating range Min. US g.p.m.	Max. US g.p.m.	η Max. US g.p.m.	H(Q=0) ft	η Max. ft	P2(Q=0) hp	Max. hp	η Max. hp	Operating speed	rpm	
actual	8 7/8	32.8	96.3	66	77.2	65.1	2.78	2.35	60	1740		
Min.	0	/	/	66	77.2	65.1	/	2.35			0	
Max.	10 3/16	/	/	78.8	110	92.3	/	3.72			0	
									Nominal flow	US g.p.m.	0	
									Nominal head	ft	0	
									Inlet pressure	psi	0	
									Static head	ft	0	

**Power datas referred to:**

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 3B

Water, pure [100%] ; 39.2°F; 62.4lb/ft³; 1.69E-5ft²/s

MEI: N.A - according to Ecodesign Directive 2009/125/EC and Regulation (EU) No.547/2012

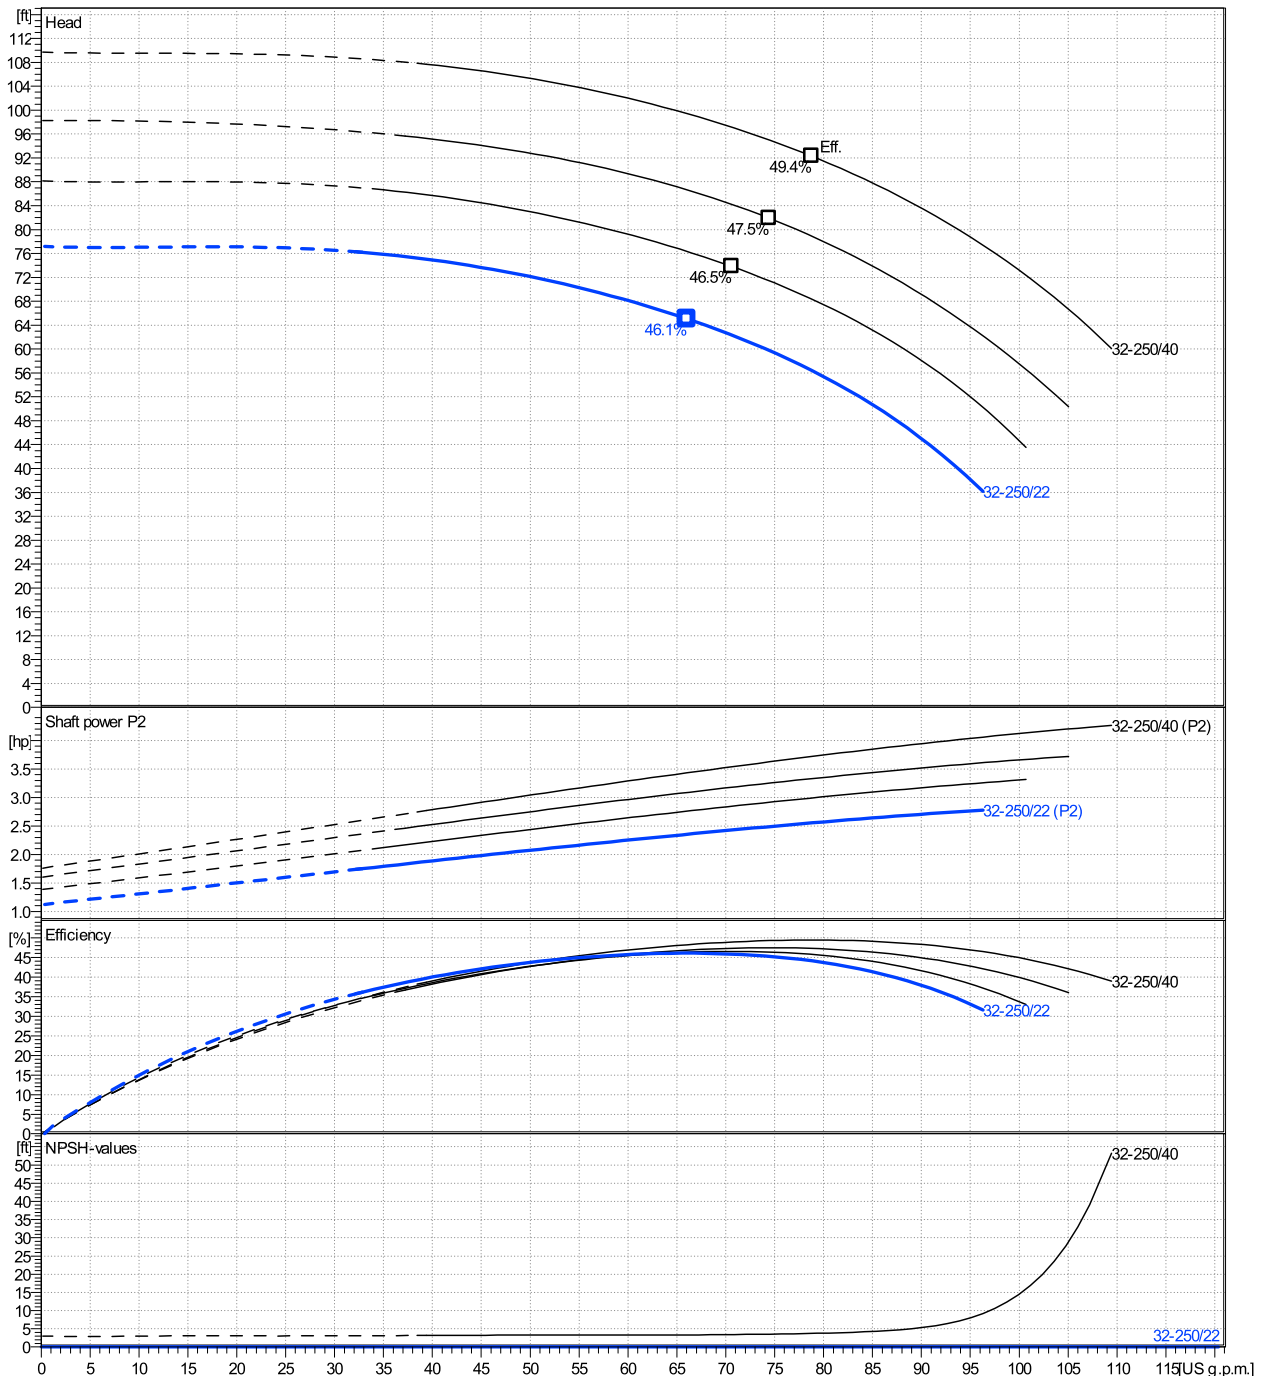


# NSCE32-250/22/P46PCS4

## Dimensions

Company name  
Contact  
Phone number  
e-mail address

Extended shaft  
4 poles motor  
PLM 100 B14 2,2 kW

Electrical and dimensional data refer to IE3 motor

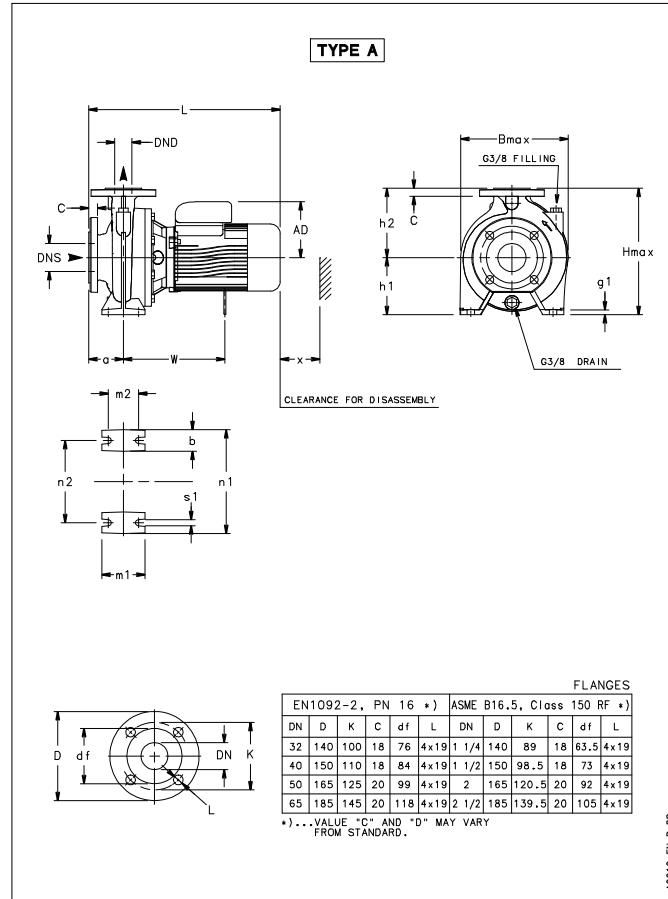

### Dimensions [ inch ]


a	3 <sup>15</sup> / <sub>16</sub>		
AD	6 <sup>5</sup> / <sub>8</sub>		
B max	13 <sup>1</sup> / <sub>2</sub>		
b	2 <sup>9</sup> / <sub>16</sub>		
DND	1 <sup>1</sup> / <sub>4</sub>		
DNS	1 <sup>15</sup> / <sub>16</sub>		
g1	5 <sup>9</sup> / <sub>8</sub>		
H max	15 <sup>15</sup> / <sub>16</sub>		
h1	7 <sup>1</sup> / <sub>16</sub>		
h2	8 <sup>7</sup> / <sub>8</sub>		
L	20 <sup>9</sup> / <sub>16</sub>		
m1	4 <sup>15</sup> / <sub>16</sub>		
m2	3 <sup>3</sup> / <sub>4</sub>		
n1	12 <sup>9</sup> / <sub>8</sub>		
n2	9 <sup>13</sup> / <sub>16</sub>		
s1	9 <sup>9</sup> / <sub>16</sub>		
Type	A		
W	11 <sup>1</sup> / <sub>4</sub>		
x	3 <sup>3</sup> / <sub>4</sub>		

### Weight

<b>Total weight</b>	<b>74 kg</b>
---------------------	--------------

### Connections

Suction nozzle		Discharge nozzle	
<b>DN 50</b>		<b>DN 32</b>	
<b>PN 16</b>		<b>PN 16</b>	
<b>EN1092-2</b>		<b>EN1092-2</b>	
C	1 <sup>3</sup> / <sub>16</sub>	C	1 <sup>11</sup> / <sub>16</sub>
D	6 <sup>1</sup> / <sub>2</sub>	D	5 <sup>1</sup> / <sub>2</sub>
df	3 <sup>7</sup> / <sub>8</sub>	df	3
DN	1 <sup>15</sup> / <sub>16</sub>	DN	1 <sup>1</sup> / <sub>4</sub>
K	4 <sup>15</sup> / <sub>16</sub>	K	3 <sup>15</sup> / <sub>16</sub>
L	4 x 19	L	4 x 19

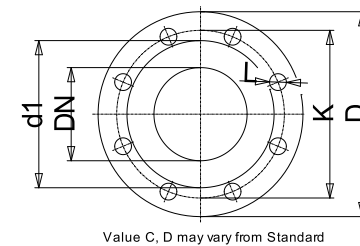

Note:  
Weight and Dimensions of selected Hydrovar are NOT considered.  
Please refer to additional datasheet.

### Dimensions and weight without obligation

<b>Project</b>		<b>Created by</b>		<b>Last update</b>	1/9/2025
<b>Block</b>	NSCE32-250/220/P26PCS4	<b>Created on</b>	1/9/2025		